



User Manual

Defend what you create

© Doctor Web, 2015. All rights reserved.

This document is the property of Doctor Web. No part of this document may be reproduced, published or transmitted in any form or by any means for any purpose other than the purchaser's personal use without proper attribution.

TRADEMARKS

Dr.Web, the Dr.WEB logo, SpIDer Mail, SpIDer Guard, CureIt!, CureNet!, AV-desk are trademarks and registered trademarks of Doctor Web in Russia and/or other countries. Other trademarks, registered trademarks and company names used in this document are property of their respective owners.

DISCLAIMER

In no event shall Doctor Web and its resellers or distributors be liable for errors or omissions, or any loss of profit or any other damage caused or alleged to be caused directly or indirectly by this document, the use of or inability to use information contained in this document.

Dr.Web Security Space
Version 11.0
User Manual
30.10.2015

Doctor Web Head Office
2-12A, 3rd str. Yamskogo polya
Moscow, Russia
125124

Web site: www.drweb.com
Phone: +7 (495) 789-45-87

Refer to the official web site for regional and international office information.

Doctor Web

Doctor Web develops and distributes Dr.Web® information security solutions which provide efficient protection from malicious software and spam.

Doctor Web customers can be found among home users from all over the world and in government enterprises, small companies and nationwide corporations.

Dr.Web antivirus solutions are well known since 1992 for continuing excellence in malware detection and compliance with international information security standards. State certificates and awards received by the Dr.Web solutions, as well as the globally widespread use of our products are the best evidence of exceptional trust to the company products.

We thank all our customers for their support and devotion to the Dr.Web products!



Table of Contents

1. Introduction	7
1.1. About This Manual	8
1.2. Document Conventions	8
1.3. Detection Methods	9
2. System Requirements	11
3. Installing, Removing, or Changing the Program	12
3.1. Installation Procedure	13
3.2. Reinstalling or Removing the Program	16
4. Licensing	18
4.1. Activation Methods	19
4.2. Renewing License	19
4.3. Registration Wizard	19
5. Getting Started	21
5.1. Testing the Anti-virus	23
6. Tools	24
6.1. License Manager	24
6.2. Data Loss Prevention	25
6.3. Anti-virus Network	25
6.4. Quarantine Manager	27
6.5. Support	28
6.5.1. Report Wizard	29
7. Update	30
8. Dr.Web Scanner	31
8.1. Scan Modes	31
8.2. Actions upon Detection	34
8.3. Command-Line Scanning Mode	35
8.4. Console Scanner	36
8.5. Automatic Launch of Scanning	36
9. Settings	37
10. Main Settings	38



10.1. Notifications	38
10.2. Update	41
10.3. Network	42
10.4. Self-Protection	44
10.5. Dr.Web Cloud	45
10.6. Anti-virus Network	46
10.7. Devices	47
10.8. Advanced	49
11. Parental Control	52
11.1. Configuring Parental Control	53
12. Exclusions	56
12.1. Websites	56
12.2. Files and Folders	57
12.3. Applications	59
12.4. Anti-spam	60
13. Protection Components	62
13.1. SpIDer Guard	62
13.1.1. Configuring SpIDer Guard	62
13.2. SpIDer Gate	67
13.2.1. Configuring SpIDer Gate	67
13.3. SpIDer Mail	70
13.3.1. Configuring SpIDer Mail	70
13.3.2. Anti-spam	73
13.4. Scanner	75
13.5. Dr.Web Firewall	77
13.5.1. Training Firewall	77
13.5.2. Configuring Firewall	79
13.6. Dr.Web for Microsoft Outlook	87
13.6.1. Configuring Dr.Web for Microsoft Outlook	87
13.6.2. Threat Detection	87
13.6.3. Spam Check	90
13.6.4. Event Logging	92
13.6.5. Statistics	93
13.7. Preventive Protection	95



Applications	98
Appendix A. Command-Line Parameters	98
Scanner and Console Scanner Parameters	98
Dr.Web Updater Command-line Parameters	102
Return Codes	104
Appendix B. Computer Threats and Neutralization Methods	106
Classification of Computer Threats	106
Actions Applied to Threats	110
Appendix C. Naming of Viruses	111



1. Introduction

Dr.Web Security Space provides multilevel protection of RAM, hard disks, and removable devices against any kind of viruses, rootkits, Trojans, spyware, adware, hacktools, and all possible types of malicious objects from any external source.

At present, in addition to **Dr.Web** products for Windows, there are versions of anti-virus software for IBM® OS/2®, Novell® NetWare®, Macintosh®, Microsoft Windows Mobile®, Android®, Symbian®, and several Unix®-based systems (Linux®, FreeBSD®, Solaris®).

Dr.Web uses a convenient and efficient procedure for updating virus databases and program components via the Internet.

Dr.Web can detect and remove undesirable programs (adware, dialers, jokes, riskware, and hacktools) from your computer. To detect undesirable programs and perform actions with the files contained in the programs, anti-virus components of **Dr.Web** are used.

Each of **Dr.Web** anti-virus solutions for Microsoft® Windows® operating systems includes a set of the following components:

Dr.Web Scanner is an anti-virus scanner with graphical interface. The program runs on user demand or as scheduled and checks the computer for viruses.

Dr.Web Console Scanner—a command-line version of **Dr.Web Scanner**.

SpIDer Guard—an on-access anti-virus scanner that constantly resides in memory while scanning processes and files on start or creation or upon detection of malicious activity.

SpIDer Mail – the program intercepts calls sent from mail clients to mail servers through POP3/SMTP/IMAP4/NNTP protocols (IMAP4 stands for IMAPv4rev1), and detects and neutralizes mail viruses before a mail message is received by the mail client or before a mail message is sent to the mail server..

Dr.Web for Outlook is a plug-in that checks Microsoft Outlook mail boxes for threats and spam.

SpIDer Gate—an HTTP monitor which, by default, automatically checks incoming HTTP-traffic and blocks all malicious objects. The component is used only in Dr.Web Security Space. URL filtering of malicious and unreliable websites is also enabled by default. You can also [connect](#) to **Doctor Web** cloud services which allow anti-virus components to use the latest information on threats. This information is stored and updated on **Doctor Web** servers in real-time mode.

Parental Control—a component that restricts access to websites, files and folders, and allows to set custom time limits on using your computer and the Internet for different Windows accounts. The component is used only in Dr.Web Security Space. You can also [connect](#) to **Doctor Web** cloud services which allow anti-virus components to use the latest information on threats. This information is stored and updated on **Doctor Web** servers in real-time mode.

Dr.Web Firewall—a personal firewall that protects your computer from unauthorized access and prevents leak of vital data through networks.

Dr.Web Updater allows registered users to receive updates of the virus database and other program files as well as automatically install them.

SpIDer Agent is a utility that lets you set up and manage **Dr.Web** components.



1.1. About This Manual

This User Manual describes installation and effective utilization of **Dr.Web**.

You can find detailed descriptions of all graphical user interface (GUI) elements in the Help system which can be accessed from any component.

This User Manual describes how to install the program and contains some words of advice on how to use it and solve typical problems caused by virus threats. Mostly, it describes the standard operating modes of the **Dr.Web** components (with default settings).

The Appendices contain detailed information for experienced users on how to set up **Dr.Web**.



Due to constant development, program interface of your installation can mismatch the images given in this document.

1.2. Document Conventions

The following symbols and text conventions are used in this guide:

Convention	Comment
Bold	Names of buttons and other elements of the graphical user interface (GUI), and required user input that must be entered exactly as given in the guide.
Green and bold	Names of Doctor Web products and components.
<u>Green and underlined bold</u>	Hyperlinks to topics and webpages.
Monospace	Code examples, input to the command line and application output.
<i>Italic</i>	For command-line input, it indicates parameter values.
CAPITAL LETTERS	Names of keys and key sequences.
Plus sign (+)	For example, ALT+F1 means to hold down the ALT key while pressing the F1 KEY.
Exclamation mark	A warning about potential errors or any other important comment.



1.3. Detection Methods

Doctor Web anti-virus solutions use several malicious software detection methods simultaneously, which allows them to perform thorough checks on suspicious files and control software behavior.

Detection Methods

Signature analysis

The scans begin with signature analysis that is performed by comparison of file code segments to the known virus signatures. A *signature* is a finite continuous sequence of bytes which is necessary and sufficient to identify a specific virus. To reduce the size of the signature dictionary, Dr.Web anti-virus solutions use signature checksums instead of complete signature sequences. Checksums uniquely identify signatures, which preserves correctness of virus detection and neutralization. Dr.Web virus databases are composed so that some entries can be used to detect not just specific viruses, but whole classes of threats.

Origins Tracing™

On completion of signature analysis, **Dr.Web** anti-virus solutions use the unique **Origins Tracing** method to detect new and modified viruses that use the known infection mechanisms. Thus, **Dr.Web** users are protected against such threats as notorious blackmailer Trojan.Encoder.18 (also known as gpcode). In addition to detection of new and modified viruses, the **Origins Tracing** mechanism allows to considerably reduce the number of false triggering of the heuristic analyzer. Objects detected using the **Origins Tracing** algorithm are indicated with the `.Origin` extension added to their names.

Execution emulation

The technology of program code emulation is used for detection of polymorphic and encrypted viruses, when the search against checksums cannot be applied directly, or is very difficult to be performed (due to the impossibility of building secure signatures). The method implies simulating the execution of an analyzed code by an *emulator*—a programming model of the processor and runtime environment. The emulator operates with protected memory area (*emulation buffer*), in which execution of the analyzed program is modelled instruction by instruction. However, none of these instructions is actually executed by the CPU. When the emulator receives a file infected with a polymorphic virus, the result of the emulation is a decrypted virus body, which is then easily determined by searching against signature checksums.

Heuristic analysis

The detection method used by the heuristic analyzer is based on certain knowledge (*heuristics*) about certain features (attributes) that might be typical for the virus code itself, and vice versa, that are extremely rare in viruses. Each attribute has a weight coefficient which determines the level of its severity and reliability. The weight coefficient can be positive if the corresponding attribute is indicative of a malicious code or negative if the attribute is uncharacteristic of a computer threat. Depending on the sum weight of a file, the heuristic analyzer calculates the probability of unknown virus infection. If the threshold is exceeded, the heuristic analyzer generates the conclusion that the analyzed object is probably infected with an unknown virus.

The heuristic analyzer also uses the **FLY-CODE™** technology, which is a versatile algorithm for extracting files. The technology allows making heuristic assumptions about the presence of malicious objects in files compressed not only by packagers **Dr.Web** is aware of, but also by new, previously unexplored programs. While checking packed objects, **Dr.Web** anti-virus solutions also use structural entropy analysis. The technology detects threats by arranging pieces of code; thus, one database entry allows identification of a substantial portion of threats packed with the same polymorphous packager.

As any system of hypothesis testing under uncertainty, the heuristic analyzer may commit type I or type II errors (omit viruses or raise false alarms). Thus, objects detected by the heuristic analyzer



are treated as “suspicious”.

While performing any of the abovementioned checks, **Dr.Web** anti-virus solutions use the most recent information about known malicious software. As soon as experts of **Doctor Web Virus Laboratory** discover new threats, the update for virus signatures, behavior characteristics, and attributes is issued. In some cases, updates can be issued several times per hour. Therefore, even if a brand new virus passes through the **Dr.Web** resident guards and penetrates the system, after an update it is detected on the list of processes and neutralized.



2. System Requirements



Before installing **Dr.Web**:

- Remove any anti-virus software from your computer to prevent possible incompatibility of resident **Dr.Web** components.
- If you install **Dr.Web Firewall**, uninstall all other firewalls from your computer.
- Install all critical updates recommended by the operating system developer. If the operating system is no longer supported, then upgrade to a newer operating system.

Dr.Web can be installed and run on a computer which meets the following minimum requirements:

Component	Requirement
CPU	An i686-compatible processor.
Operating system	<p>For 32-bit platforms:</p> <ul style="list-style-type: none">• Windows XP with Service Pack 2 or higher• Windows Vista with Service Pack 2 or higher• Windows 7• Windows 8• Windows 8.1• Windows 10 <p>For 64-bit platforms:</p> <ul style="list-style-type: none">• Windows Vista with Service Pack 2 or higher• Windows 7• Windows 8• Windows 8.1• Windows 10 <p>You may need to download and install certain system components from the Microsoft official website. If necessary, Dr.Web will notify you about the required components and provide download links.</p>
Free RAM	Minimum 512 MB.
Hard disk space	1 GB for Dr.Web components. Files created during installation will require additional space.
Resolution	Minimum recommended screen resolution is 800x600.
Other	<p>For the Dr.Web for Microsoft Outlook extension, one of the following Microsoft Outlook clients from the Microsoft Office package is required:</p> <ul style="list-style-type: none">• Outlook 2000 (Outlook 9)• Outlook 2002 (Outlook 10 or Outlook XP)• Office Outlook 2003 (Outlook 11)• Office Outlook 2007• Office Outlook 2010 with Service Pack 2• Office Outlook 2013

Other system requirements are similar to those for the corresponding operating system.



3. Installing, Removing, or Changing the Program

Before installing **Dr.Web**, note the [system requirements](#) and do the following:

- Install all critical updates released by Microsoft for the OS version used on your computer (they are available on the company update site at <http://windowsupdate.microsoft.com>).
- Check the file system with system utilities and remove the detected defects.
- Close all active applications.



Remove any anti-virus software and firewalls from your computer to prevent possible incompatibility of resident components.



3.1. Installation Procedure



To install **Dr.Web**, the user must have administrative privileges.

There are two installation modes of **Dr.Web** anti-virus software:

- The background mode
- The usual mode

Installation with command-line parameters

To install **Dr.Web** with command-line parameters, enter the executable file name with necessary parameters in the command line (the parameters affect installation in background mode, installation language, restart after installation completes, and installation of **Firewall**):

Parameter	Description
installFirewall	Install Dr.Web Firewall .
lang	Language used for the installation. The value of this parameter is language in ISO 639-1 format.
reboot	Restart the computer automatically after installation is complete.
silent	Installation in the background mode.

For example, to start background installation of **Dr.Web** with reboot after the process completes, execute the following command:

```
drweb-11.0-ss-win.exe /silent yes /reboot yes
```

Usual installation

To start usual installation, do one of the following:

- Run the file if the installation kit is supplied as a single executable file.
- Insert the company disk into the CD/DVD drive if the installation kit is supplied on the disk. If autorun is enabled, the installation will start automatically. If autorun is disabled, run the autorun.exe file of the installation kit manually. The window opens and displays the autorun menu. Click **Install**.

At any installation step, before the wizard starts copying files to your computer, you can do the following:

- Return to the previous step by clicking **Back**.
- Go to the next step by clicking **Next**.
- Abort installation by clicking **Exit**.


Installing Dr.Web

1. If other anti-virus software is installed on your computer, the Installation Wizard informs you on incompatibility between **Dr.Web** and another anti-virus product and offers to remove it.



Before the installation starts, the Wizard checks if the installation file is the latest one. If a newer installation file exists, you will be offered to download it before the installation.

- At this step, you are prompted to connect to **Dr.Web** cloud services that allow anti-virus components to use the newest information which is stored and updated on **Doctor Web** servers. This option is enabled by default. You can also specify whether **Dr.Web Firewall** should be installed or not.

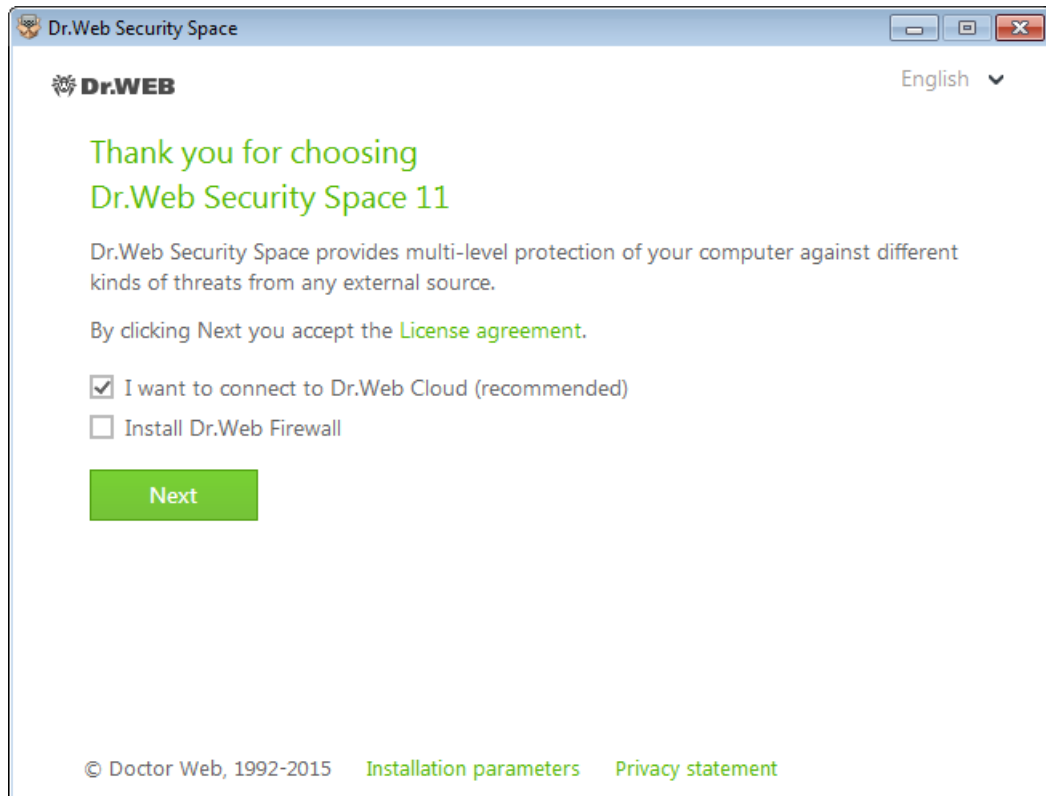


To select components you want to install, specify the installation path and configure other settings, click **Installation parameters**. The option is meant for experienced users. If you want to use default installation settings, go to step 4.

- On the first tab, you can specify the components you want to install.
- On the second tab, you can change the installation path.
- The last tab of the window allows you to select the **Update during installation** check box to download updates to virus databases and other program components. The tab also prompts you to create shortcuts to **Dr.Web**.
- If necessary, specify proxy server parameters.

To save the changes, click **OK**. To close the window without saving the changes, click **Cancel**.

- Click **Next**. Please note that by clicking the **Next** button you accept the terms of the License agreement.
- The **Registration Wizard** informs you that a license is required for **Dr.Web** operation. Do one of the following:
 - If a key file is present on the hard drive or removable media, click **Specify path to an available valid key file** and select the file in the open window. To change the path, click **Browse** and select another key file.
 - If you want to receive a key file during the installation, select **Receive license during installation**.
 - To continue installation **without a license**, select **Receive license later**. Updates are not available until you specify or obtain a key file.

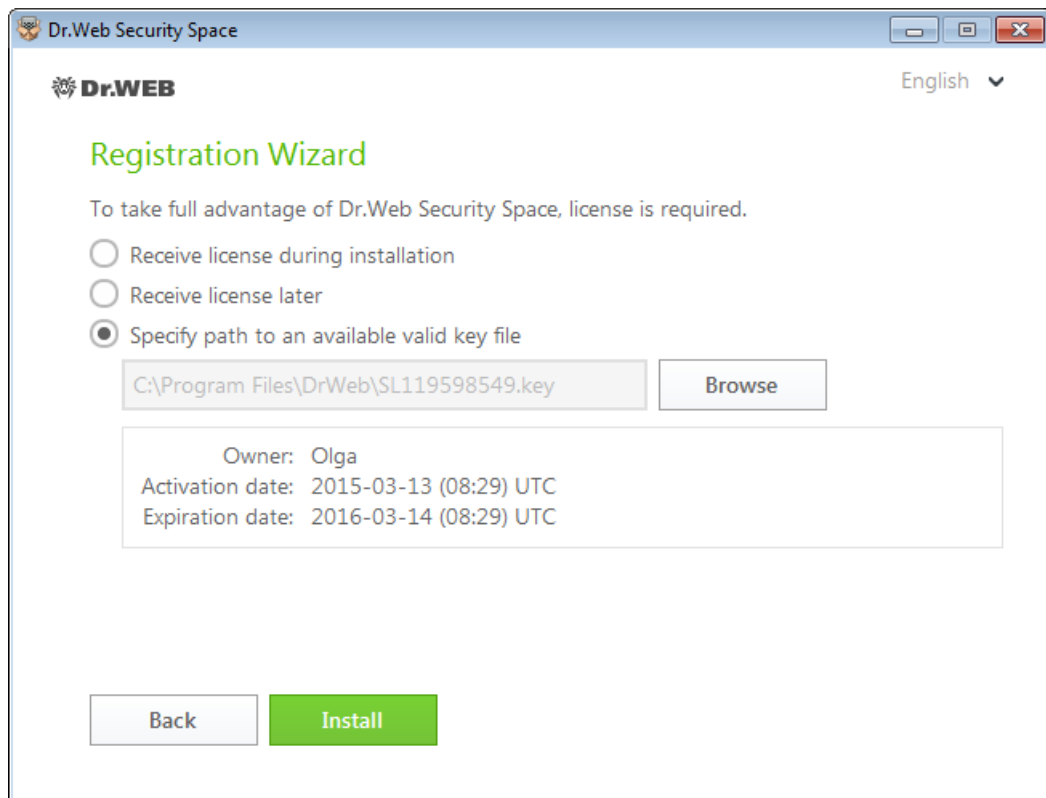

Click **Install**.

5. If you specified a key file or received it during the installation and did not clear the **Update during installation** check box, the wizard updates virus databases and other **Dr.Web** components. Updating starts automatically and does not require any additional actions.
6. Restart your computer after the installation is complete.




3.2. Reinstalling or Removing the Program



After you uninstall **Dr.Web**, your computer will not be protected from viruses and other malware.

1. To uninstall **Dr.Web** or change its configuration by adding or removing individual components, select (depending on the operating system):
 - For Windows XP (depending on the presentation of the Start menu):
 - Start menu: **Start** → **Control Panel** → **Add or Remove programs**.
 - Classic Start menu: **Start** → **Settings** → **Control Panel** → **Add or Remove programs**.
 - For Windows Vista (depending on the presentation of the Start menu):
 - Start menu: **Start** → **Control Panel**, then, depending on the Control Panel view:
 - Classic view: **Programs and Features**.
 - Control Panel Home: **Programs** → **Programs and Features**.
 - Classic Start menu: **Start** → **Settings** → **Control Panel** → **Add or Remove programs**.
 - For Windows 7, click **Start** → **Control Panel**, then, according to the Control Panel view:
 - Small/large icons: **Programs and Features**.
 - Category: **Programs** → **Uninstall a program**.
 - For Windows 8 and Windows 8.1, open **Control Panel** in any convenient way: for example, right-click the bottom left corner and select the **Control Panel** item in the shortcut menu. According to the selected **View** option for the Control Panel, click:
 - Small/large icons: **Programs and Features**.
 - Category: **Programs** → **Uninstall a program**.
2. In the open window, select the program. To delete the program completely, click **Uninstall** and go to step 6. To change the configuration of **Dr.Web** by adding or removing certain components, click **Change**. The window of the Installation Wizard opens.

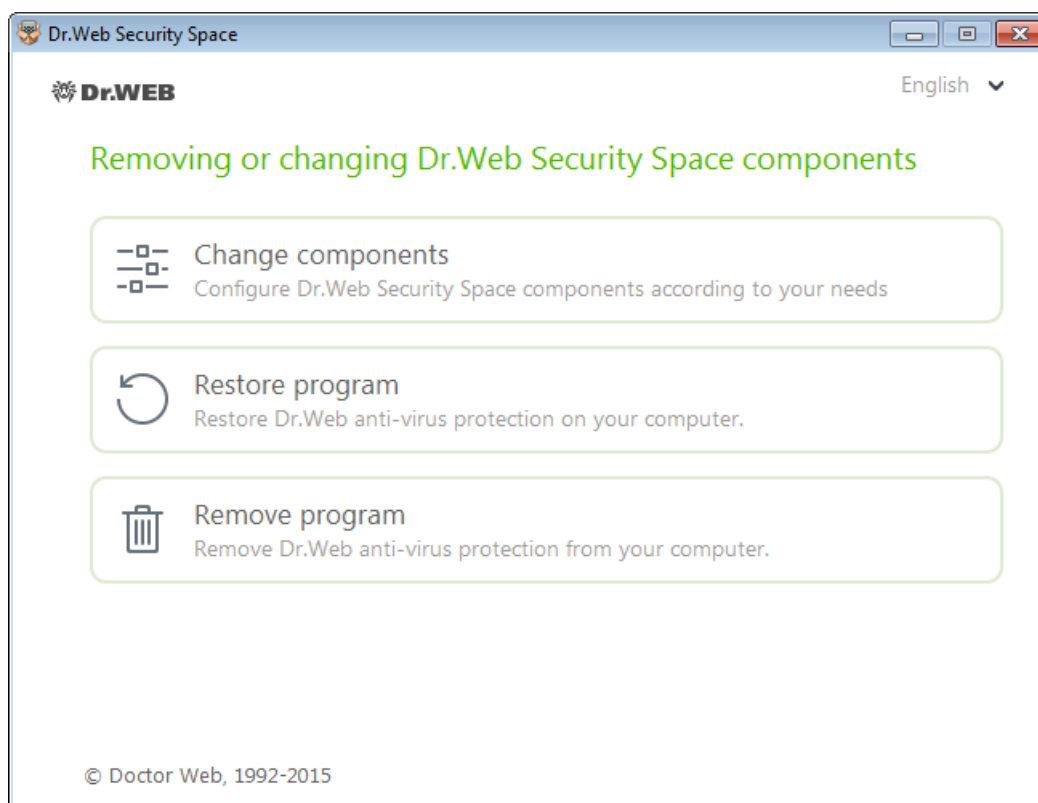

To restore anti-virus protection on your computer, select **Restore program**.

3. To change the **Dr.Web** configuration, click **Change components**. In the open window, select check boxes of the components you want to add and clear check boxes of the components you want to remove. When you finish adjusting the component set, click **Install**.



When removing components of **Dr.Web** the **Disabling self-protection** window opens. Enter the displayed confirmation code and click **Install**.

4. To delete all installed components, select **Remove program**.
5. In the **Parameters** window, select check boxes of those components that you do not want to remove from your system. Saved objects and settings can be used by the program if it is installed again. By default, all options— **Quarantine**, **Dr.WebSecurity Space** settings and **Protected copies of files** —are selected. Click **Next**.
6. In the next window, confirm deletion of **Dr.Web** by entering the displayed code and then click **Remove program**.
7. When prompted, restart the computer to complete the procedure of **Dr.Web** components deletion or modification.



4. Licensing

To use **Dr.Web** for a long period of time, activate a license. You can purchase a license with the product or on the **Doctor Web** official [website](#). A license allows to take advantage of all product features during the whole period. Parameters of the license are set in accordance with the software license agreement.

If you want to evaluate the product before purchasing it, you can activate a trial version. It provides you with full functionality of the main components, but the period of validity is considerably restricted.



You can activate a trial version for the same computer no more than once a year.

A trial version may be valid for:

- 3 months. For that, register on the **Doctor Web** official [website](#) and receive a serial number.
- For 1 month. For that purpose, no serial number is required and no registration data is requested.

Key file

The use rights for the **Dr.Web** are specified in the *key file*. The key files received during installation or within the product distribution kit are installed automatically.

The key file has the .key extension and contains the following information:

- List of licensed anti-virus components
- Licensed period for the product
- Availability of technical support for the user
- Other restrictions (for example, the number of remote computers allowed for simultaneous anti-virus check)



By default, the key file is located in the **Dr.Web** installation folder. **Dr.Web** verifies the file regularly. Do not edit or modify the key file to avoid its corruption.

If no valid key file is found, **Dr.Web** components are blocked.

A *valid* license key file satisfies the following criteria:

- License is not expired
- Integrity of the key file is not violated

If any of the conditions is violated, the key file becomes *invalid* and **Dr.Web** stops detecting and neutralizing malicious programs in files, memory, and email messages.

If during **Dr.Web** installation, a key file was not received and no path to it was specified, a *temporary* key file is used. Such a key file provides full functionality of **Dr.Web**. However, on the **SpIDer Agent menu**, **My Dr.Web** and **Update** items are not available until you either activate a license or a trial version or specify a path to the valid key file via **License Manager**.

It is recommended to keep the key file until the license or a demo period expires.



A key file for a trial version activation can be used only on the computer where the registration procedure was run.



4.1. Activation Methods

You can activate your license or a trial version in one of the following ways:

- Using the [Registration Wizard](#) during installation or later
- Obtaining the key file during registration on the official [website](#) of **Doctor Web**
- Specifying the path to the valid key file residing on your computer during installation or in the [Registration Wizard](#) window

Reactivating license

You may need to reactivate a license or a trial version if the key file is lost.



When reactivating a license or a trial version, you receive the same key file as during the previous registration providing that the validity period is not expired.

A 3-month trial version can be reactivated only on the computer where the registration procedure was run.


When you reinstall the product or install it on several computers, if the license allows for that, you will be able to use the previously registered key file. Reactivation of the key file is not required.

The number of requests for a key file receipt is limited. One serial number can be registered not more than 25 times. If more requests are sent, the key file will not be delivered. In this case, to receive a lost key file, contact your [technical support](#) describing your problem in detail, stating your personal data input during the registration and the serial number. The key file will be sent by technical support to your email address.

4.2. Renewing License

In some situations, for example, when the license expires or characteristics of the protected system change, you may need to renew or extend the **Dr.Web** license. If so, you should change the current key file. **Dr.Web** supports hot license update without stopping or reinstalling the product.

To change a key file

1. Open [Registration Wizard](#). You can also purchase a new license or renew an existing one on your personal page on the **Doctor Web** official site. To visit the webpage, use the **My Dr.Web** option in the **License Manager** window or on the **SpIDer Agent menu** 


4.3. Registration Wizard

SpIDer Agent checks whether you have a [key file](#). If no key file is found, you are prompted to obtain a key file on the Internet.

A key file can be obtained during the installation procedure. For this, select the **Receive license during installation** option [at step 5](#) of the installation procedure, and activation of a license or a trial version will start.

You can also obtain a key file by starting activation of the license or demo period after the product is installed on your system.



1. Click the **SpIDer Agent** icon  in the notification area and select **License**. The **License Manager** window opens.
2. Click **Buy or activate new license**. The **Registration Wizard** window opens.

To activate the license, you need to enter the registration serial number, supplied to you when purchasing **Dr.Web**.

License activation

If you have a serial number for activation of a license or a trial version for 3 months, click **Activate**. If you have already activated a license or a trial version, specify a valid key file. or.

- If you enter a serial number for activation of a trial version for 3 months, the window with [activation results](#) opens.
- If you enter a serial number for activation of a license, the [registration data entry](#) window opens.



If you have already been a user of **Dr.Web**, you are eligible for extension of your new license for another 150 days. To enable the bonus, enter your serial number and specify the path to the previous key file in the open window.

New license

To purchase a license from **Doctor Web** online store, click **Purchase**.

Trial version

You can activate a trial version to evaluate operation of **Dr.Web Security Space**:

- For 3 months. For that, register on the [website](#) and receive a serial number.



After you complete the questionnaire, a serial number required to activate the trial version for 3 months is sent to the specified email address.

- For 1 month. For that purpose, no serial number is required and no registration data is requested.

Registration data entry

To register a license, enter personal data (your registration name and email address) and select the country. All the listed fields are obligatory and must be filled in.

Click **Next**.

Activation results

If the activation procedure completes successfully, the corresponding message is displayed. Click **Finish** to proceed to updating the virus databases and other package files. This procedure does not require user intervention.

Click Connection parameters to adjust Internet connection parameters or click **Repeat** to correct invalid data.






5. Getting Started


After **Dr.Web** is installed, the **SpIDer Agent**  icon is added to the notification area.



If **SpIDer Agent** is not running, select the **Dr.Web** application group on the Windows **Start** menu and then select **SpIDer Agent**.

The **SpIDer Agent** icon indicates the status of **Dr.Web**:


- —all necessary components are running and protect your computer.
- —**Dr.Web** self-protection or at least one component is disabled, which compromises security of **Dr.Web** and your computer. Enable self-protection or the component.
- —components are expected to start after the operating system startup process is complete, thus wait until the components start; or an error occurred while starting one of the main **Dr.Web** components, and your computer is at risk of virus infection. Check that you have a valid key file and, if required, [install](#) it.

Various notifications may appear over the **SpIDer Agent** icon  if [configured](#).

To open the menu, click the **SpIDer Agent** icon  in the Windows notification area.



To access the protection components and settings and to disable components, you need to have administrative privileges.

The **SpIDer Agent** menu  allows to perform the main management and setting functions of **Dr.Web**.

My Dr.Web. Opens your personal webpage on the **Doctor Web** official website. This page provides you with information on your license including usage period and serial number, allows to renew the license, contact technical support, and so on.

License. Opens [License Manager](#).


Tools. Opens a submenu providing access to:

- [Data loss prevention](#);
- [Anti-virus Network](#)
- [Quarantine Manager](#)
- [Support](#) section

Protection components. Quick access to the protection components list where you can enable or disable each of the components.

Update. Information about actuality of the components or virus databases. Launches the update.


Scanner. Quick access to launching different kinds of scanning.

Working mode . Allows to switch between user mode and administrator mode. By default, **Dr.Web** starts in restricted user mode, which does not provide access to [Settings](#) and settings of [Protection components](#). To switch to another mode, click the lock. If UAC is enabled, operating system will prompt a request for administrative privileges. Besides, you also need to enter the password to change the mode, if you set **Protect Dr.Web settings by password** option on the [Settings](#) window.

Statistics . Opens statistics on the components operations in the current session including the



number of scanned, infected and suspicious objects, actions performed, and so on.

Settings . Opens a window with access to the main settings, protection components settings, **Parental Control** settings and exclusions.



To access the component settings and open your personal webpage **My Dr.Web**, you also need to enter the password if you enabled the **Protect Dr.Web settings with a password** option in the [Settings](#) window.

If you forgot your password for the product settings, contact [technical support](#).

Help . Opens the help file.



5.1. Testing the Anti-virus

The EICAR (European Institute for Computer Anti-Virus Research) test file helps testing performance of anti-virus programs that detect viruses using signature analysis.

For this purpose, most of the anti-virus software vendors generally use a standard test.com program. This program was designed specially so that users could test reaction of newly-installed anti-virus tools to virus detection without compromising security of their computers. Although the test.com program is not actually a virus, it is treated by the majority of anti-viruses as if it were a virus. On detection of this "virus", **Dr.Web Security Space** reports the following: EICAR Test File (Not a Virus!). Other anti-virus tools alert users in a similar way.

The test.com program is a 68-byte COM-file that prints the following line on the console when executed: EICAR-STANDARD-ANTIVIRUS-TEST-FILE!

The test.com file contains the following character string only:

```
X5O!P%@AP[4\PZX54 (P^ ) 7CC) 7} $EICAR-STANDARD-ANTIVIRUS-TEST-FILE! $H+H*
```

To make your own test file with the "virus", create a new file with this line and save it with as test.com.




When you attempt to execute an EICAR file while **SpIDer Guard** is running in the [Optimal mode](#), the operation is not terminated and the file is not processed as malicious since it does not pose any actual threat to your system. However, if you copy or create such a file in your system, it will be detected by **SpIDer Guard** and moved to **Quarantine** by default.





6. Tools

6.1. License Manager

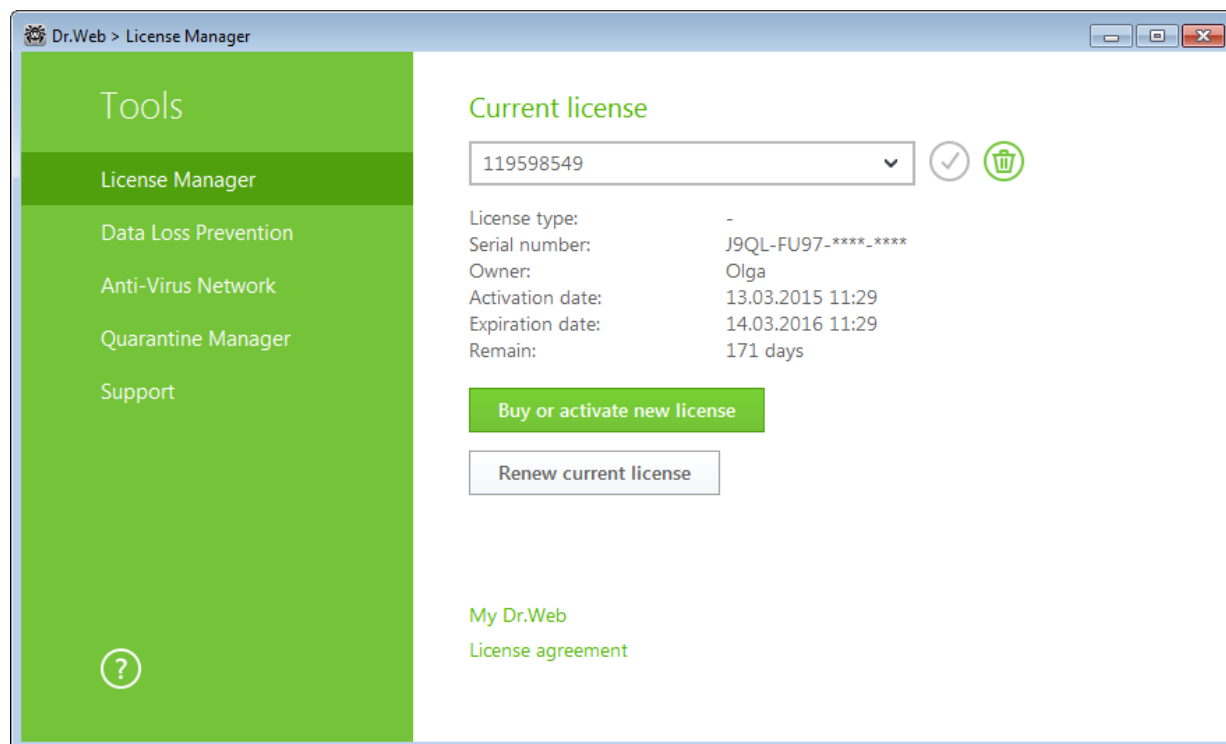In this window, you can view all **Dr.Web licenses** for your computer. You can also modify the current license, renew it or purchase a new license and activate it.



To view information on a license that is not currently in use, select it from the drop-down list. In the administrator mode, click  to delete the selected license or click  to set it as current. Please note that the current license cannot be deleted.

Once you click **Buy or activate new license**, the [Registration Wizard](#) window opens providing you with necessary instructions on how to proceed.

Once you click **Renew current license**, the program will open the page on the **Doctor Web** website where all parameters of the current license will be transmitted.

Advanced

The **My Dr.Web** link opens your personal page of the **Doctor Web** official website in the default Internet browser. This page provides you with information on your license, including usage period and serial number, and allows to renew the license, contact technical support, and so on.

The **License agreement** link opens the license agreement on the **Doctor Web** official website.




6.2. Data Loss Prevention



You cannot change data loss prevention parameters or restore files from copies in user mode. For this actions, switch to [administrator mode](#).

To protect important files from being changed by malicious software, enable the **Data Loss Prevention** function. With this function, you can make copies of files that reside in the specified folders.

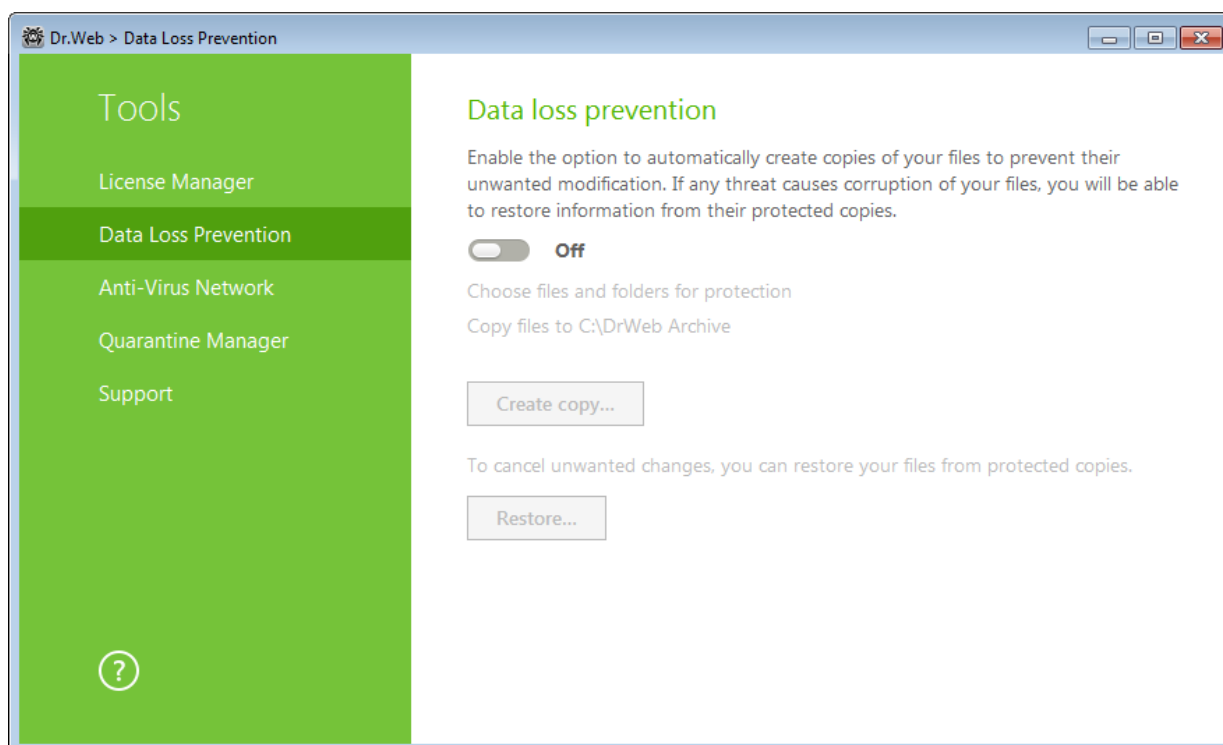

Click the **Select files and directories** link to specify the objects for which protected copies will be created. You may change the objects list at any time. You may also specify the disk to store copies and the frequency of creating copies. After the chosen interval, **Dr.Web** will inspect the specified objects for changes and create a copy if any changes have been made. You may also delete copies to free up some disk space (deleting the copies will not affect the original files) and block creating copies while working in battery mode.

If your files were corrupted, you can restore their copies created by a certain date. To do that, click the **Restore** button in the main window. In the window displayed, select the required date and all copies that were available for the date will be restored to the specified folder.

To start creation of protected copies manually, click the **Create copy** button in the main window. In the window displayed, specify the description for the new copy.



To create protected copies, you need to have minimum 5 GB free disk space on the disk that is selected for storing protected copies.


6.3. Anti-virus Network


This section allows to manage version 11.0 of **Dr.Web Anti-virus for Windows**, **Dr.Web Anti-virus**




for **Windows Servers**, or **Dr.Web Security Space** on other computers of your network.

To access **Dr.Web** remote control, click the **SpIDer Agent** , select **Tools**, and then select **Anti-virus Network**.

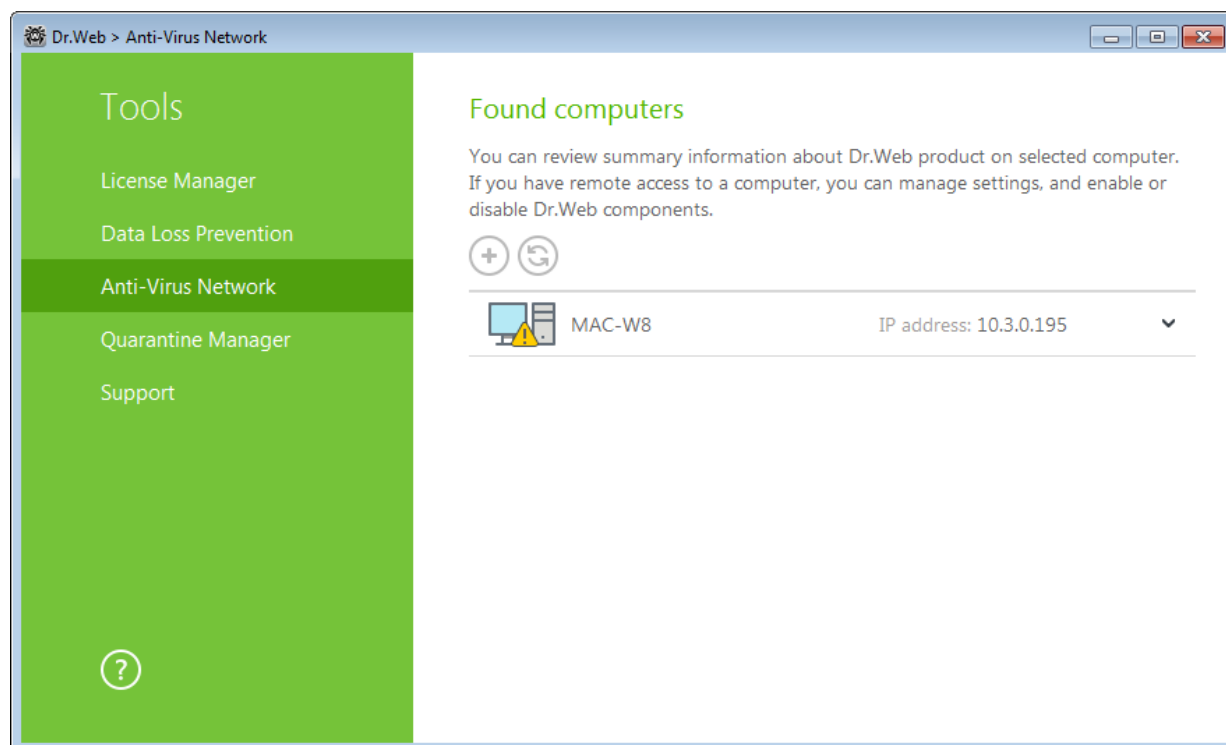

To access a remote anti-virus, select the computer from the list and click **Connect**. Enter the password [specified](#) in the settings of the remote anti-virus. An icon for the remote **SpIDer Agent**  appears in the notification area **Remote SpIDer Agent**, and the notification about established connection will be displayed.

You can view settings, enable or disable components, and configure their settings. **Anti-virus Network**, **Quarantine Manager**, and **Scanner** are not available. **Dr.Web Firewall** settings and statistics are not available as well, but you can enable or disable this component (if you accessed **Dr.Web Anti-virus for Windows** or **Dr.Web Security Space**). Also you can select the **Disconnect** item to terminate the remote connection.

If the required computer is not on the list, you can try to add it manually. For this, click  Add and enter an IP-address.




You can establish only one connection with a remote **Dr.Web product**. If one connection is already established, the **Connect** button is disabled.

Computers are listed if **Dr.Web** products installed on these computers allow remote connection. You can allow connection to your **Dr.Web** on the **Anti-virus Network** page in [Main settings](#).




6.4. Quarantine Manager

This window contains information on the **Quarantine** component of **Dr.Web** which serves for isolation of files that are suspected to be malicious. Quarantine also stores backup copies of files processed by **Dr.Web**.

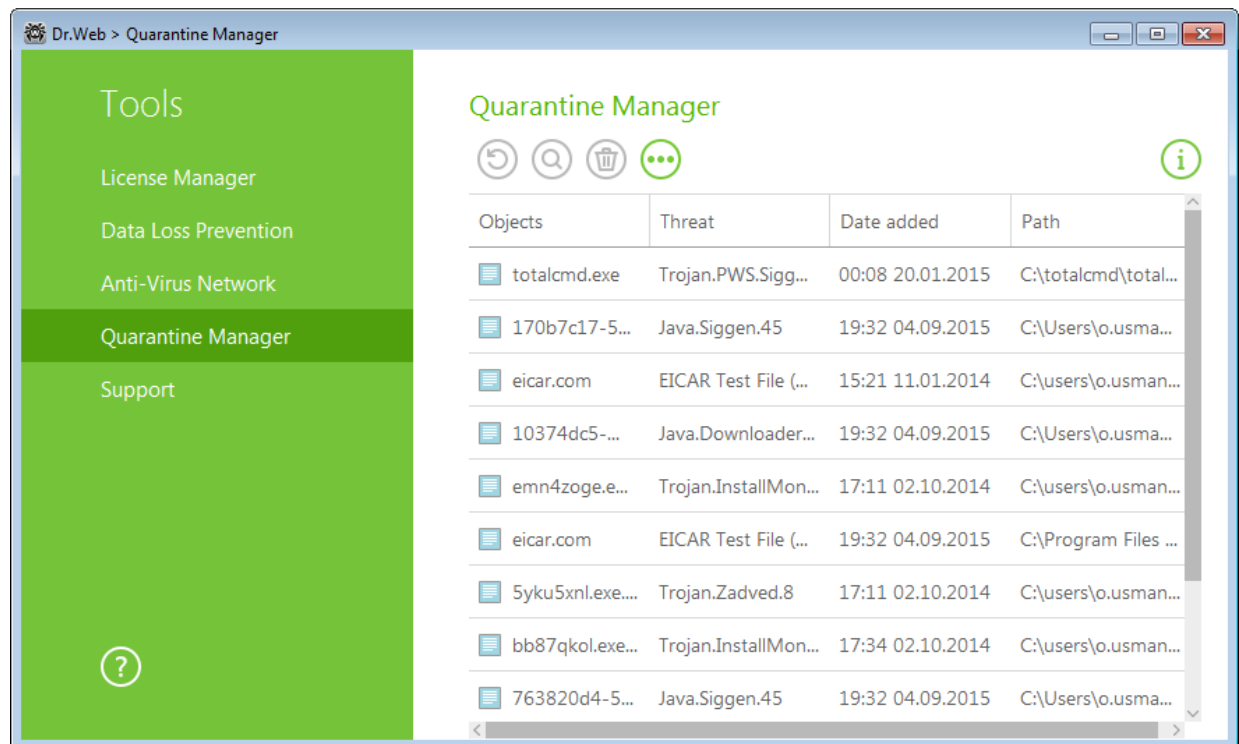

Use **Quarantine Manager settings** to select the isolation mode for infected objects detected on portable data carriers. When this option is enabled, detected threats are moved to the folder on this data carrier without being encrypted. The **Quarantine** folder is created only when the data carrier is accessible for writing. The use of separate folders and omission of encryption on portable data carriers prevents possible data loss.

To open this window, click the **SpIDer Agent icon**  in the notification area, select **Tools**, and then select **Quarantine Manager**.

The central table lists the following information on quarantined objects:

- **Object**—name of the quarantined object.
- **Threat** – malware class of the object, which is assigned by **Dr.Web** when the object is moved to Quarantine.
- **Date added**—date and time when the object was moved to Quarantine.
- **Path**—full path to the object before it was quarantined.



Quarantine displays objects that can be accessed by your user account. To view hidden objects, you need to have administrator privileges.

In the objects context menu, the following buttons are available:

- **Restore** – remove file to the selected folder and specify a new file name;



Use this option only when you are sure that the selected object is not harmful.


- **Rescan**—scan the file in quarantine again.
- **Delete**—delete the file from **Quarantine** and from the system.

You can also access these settings by right-clicking the selected object or several selected objects.

To delete all objects from **Quarantine**, click  and select **Delete all** from the drop-down list.

6.5. Support

This section provides information on the product version, components, the last update date, and the useful links that may help you to resolve issues or solve problems encountered while using **Dr.Web**.

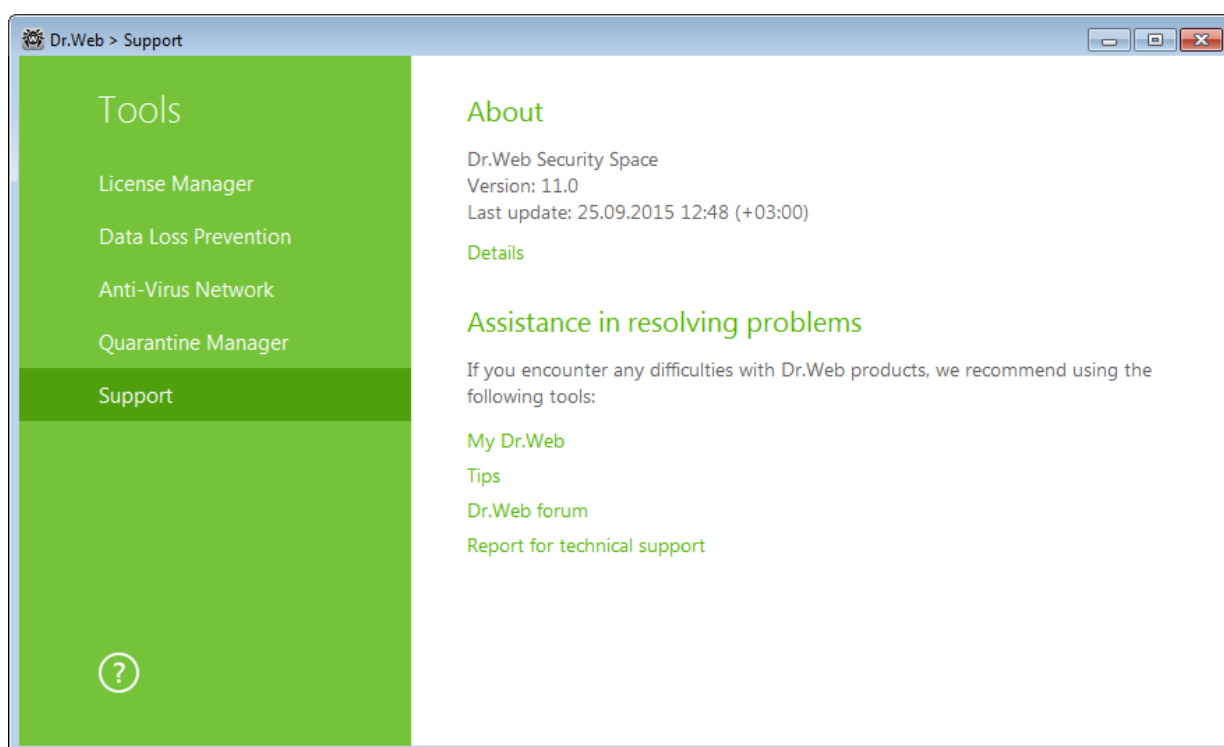

In case of questions, we recommend using the following tools:

My Dr.Web. Opens your personal webpage on the **Doctor Web** official website. This page provides you with information on your license including usage period and serial number, allows to renew the license, contact technical support, and so on.

Tips. Opens tips on working with **Dr.Web**.

Dr.Web forum. Opens **Dr.Web** forum at <http://forum.drweb.com>.

Report for technical support. Launches the wizard that will help you to [create a report](#) containing important information on your system configuration and computer working.

If you have not found a solution for the problem, you can request direct assistance from **Doctor Web** technical support by filling in the web form in the corresponding section of the support site at <http://>



support.drweb.com/.

For regional office information, visit the **Doctor Web** official website at <http://company.drweb.com/contacts/moscow>.

6.5.1. Report Wizard

When contacting **Doctor Web** technical support, you can generate a report on your operating system and **Dr.Web** operation.

The report will be stored as an archive in the Doctor Web subfolder of the %USERPROFILE% folder.

To generate a report, click the corresponding button. The report will include the following information:

1. Technical information about the operating system:

- General information about your computer
- Running processes
- Scheduled tasks
- Services, drivers
- Default browser
- Installed applications
- Policies
- HOSTS file
- DNS servers
- System event log
- System directories
- Registry branches
- Winsock providers
- Network connections
- Dr.Watson logs
- Performance index

2. Information about **Dr.Web** anti-virus solutions.

3. Information about the following plug-ins:

- **Dr.Web for IBM Lotus Domino**
- **Dr.Web for Kerio MailServer**
- **Dr.Web for Kerio WinRoute**

Information about **Dr.Web** anti-virus solutions is located in Event Viewer, in **Application and Services Logs** → **Doctor Web**.



7. Update

The anti-virus solutions of **Doctor Web** use **Dr.Web** virus databases to detect malicious software. These databases contain details and signatures for all virus threats known at the moment of the product release. With the updates, **Dr.Web** receives information required to detect and block new viruses and sometimes to cure the infected files that were considered unrecoverable before.

From time to time, updates include enhancements to anti-virus algorithms in the form of executable files and libraries. The experience of **Dr.Web** anti-virus protection helps to fix any bugs in software and to update support service and documentation.

To ensure the virus databases and software algorithms being most up to date, **Doctor Web** provides you with regular updates to virus databases and product components, which are distributed via the Internet. Dr.Web Update helps you download and install updates during the licensed period.

Update start


During update, **Dr.Web** downloads and installs all updated files that correspond to your version of **Dr.Web** and upgrades **Dr.Web** when a newer version is released.



For **Dr.Web** to update, you need a connection to the Internet, to the update mirror (local or network folder), or to the Anti-virus network with at least one computer that has an update mirror set.

All necessary parameters can be defined on the **Update** page of **Dr.Web** [Main settings](#).

Start from the SpIDer Agent menu

Click the **SpIDer Agent** [icon](#)  and select Update. This opens information on relevance of **Dr.Web** virus databases and other components as well as the date of their last update. Start updating by clicking **Update**.

Start from the command line

Open the **Dr.Web** installation folder (%PROGRAMFILES%\Common Files\Doctor Web\Updater) and run the drwpsrv.exe file. The list of command-line parameters can be found in [Appendix A](#).

Automatic start

If launched automatically, **Dr.Web** installs updates silently and logs all changes into the dwupdater.log file located in the %allusersprofile%\Doctor Web\Logs\ folder.



After an update of executable files, drivers, or libraries, a program restart may be required. In such cases, an appropriate warning displays.



8. Dr.Web Scanner

Dr.Web Scanner for Windows allows you to run anti-virus scans of disk boot sectors, random access memory (RAM), and both separate files and objects enclosed within complex structures (archives, containers, or email attachments). [detection methods](#) threat. By default, Dr.Web Scanner checks all files for viruses using both the virus database and the heuristic analyzer (a method based on the general algorithms of virus developing allowing to detect the viruses unknown to the program with a high probability). Executable files compressed with special packers are unpacked when scanned. Files in archives of all commonly used types (ACE, ALZIP, AR, ARJ, BGA, 7-ZIP, BZIP2, CAB, GZIP, DZ, HA, HKI, LHA, RAR, TAR, ZIP, etc.), in containers (1C, CHM, MSI, RTF, ISO, CPIO, DEB, RPM, etc.), and in mailboxes of mail programs (the format of mail messages should conform to RFC822) are also checked).

On detection of a malicious object, **Dr.Web Scanner** only informs you about it. Information on all infected or suspicious objects displays in the table where you can manually select a necessary action. You can apply default actions to all detected threats or select the required reaction to a certain object.

The default settings are optimal for most cases. However, if necessary, you can modify the suggested actions in the [Dr.Web Scanner settings window](#). Please note that you can specify a custom action for each detected threat after the scan is complete, but common reaction for a particular threat type should be configured beforehand.


You can also [connect](#) to **Doctor Web** cloud services that allow anti-virus components to use the latest information on threats. This information is stored and updated on **Doctor Web** servers in real-time mode.

8.1. Scan Modes


To select the scan mode



It is recommended to run **Scanner** under an account with administrative privileges. Otherwise, all folders and files that are not accessible to unprivileged user including system folder are not scanned.

1. Click the **SpIDer Agent** [icon](#)  and select **Scanner**. The menu of quick access to different scan modes opens.
2. Click the **Custom** item to scan only selected objects. The **Dr.Web Scanner** window opens.
3. Click the **Express** or **Full** item to run the corresponding scan mode.

To launch **Scanner** with default settings to scan a certain file or folder, select **Check with Dr.Web**

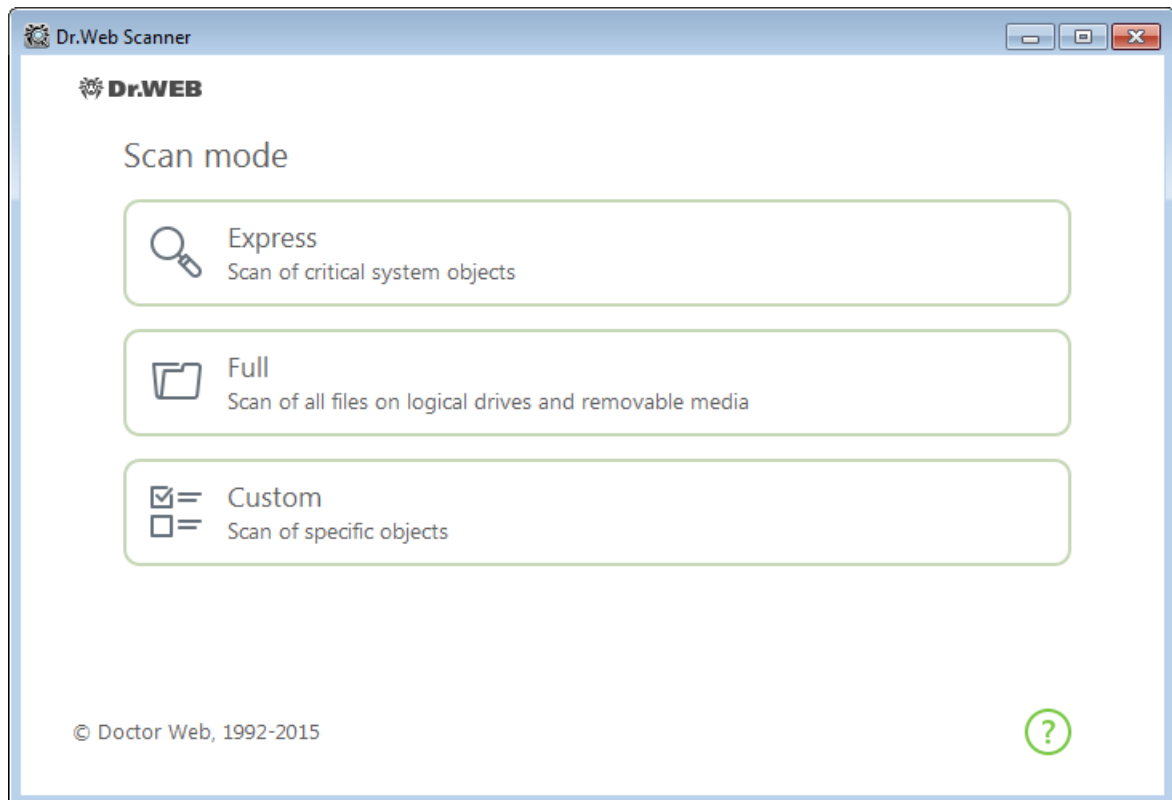

Configuring Dr.Web Scanner

To configure **Dr.Web Scanner** and its reactions to detected threats, go to **Settings** → **Protection Components** → **Scanner**.

Scan modes

Express scan

In this mode, **Scanner** checks the following:

- Boot sectors of all disks
- Random access memory
- Boot disk root folder
- Windows system folder
- User documents folder ("My Documents")
- Temporary files
- System restore points
- Presence of rootkits (if the process is run with administrative privileges)




Scanner does not check archives and email files in this mode.

Full scan

In this mode, random access memory and all hard drives (including boot sectors of all disks) are scanned. Moreover, **Dr.Web Scanner** runs a check for rootkits.



Custom scan

In this mode, you can select objects to be scanned, for example, any files and folders and such objects as random access memory, boot sectors, and so on. To start scanning selected objects, click **Start scanning**. To select objects, click .

Scan process

When scanning starts, the **Pause** and **Stop** buttons become available. During scanning, you can do the following:

- To pause scanning, click **Pause**. To resume scanning after pause, click **Resume**.
- To stop scanning, click **Stop**.



The **Pause** button is not available while processes and RAM are scanned.



8.2. Actions upon Detection

If any viruses or computer threats of other types are detected during scanning, **Dr.Web Scanner** informs you about them and recommends the most effective actions to neutralize them. You can neutralize all detected threats at once by clicking **Neutralize**. In this case, **Dr.Web Scanner** applies the most effective actions according to its configuration and threat type.



By clicking **Neutralize**, you apply actions to the objects selected in the table. **Dr.Web** selects all objects by default once scanning completes. When necessary, you can customize selection of objects to be neutralized by using check boxes next to object names or threat categories from the drop-down menu in the table header.

To select an action

1. Where necessary, select a custom action from the drop-down list in the **Action** field. By default, **Dr.Web Scanner** selects a recommended action.
2. Click **Neutralize**. **Dr.Web Scanner** applies actions to the selected threats.

There are the following limitations:

- For suspicious objects curing is impossible.
- For objects which are not files (boot sectors) moving and deletion is impossible.
- For files inside archives, installation packages or attachments, no actions are possible.

The detailed report on program operation is stored in the dwscanner.log file that is located in %USERPROFILE%\Doctor Web folder.

Column name	Description
Object	This table column contains the name of an infected or suspicious object (either a file name if a file is infected, or Boot sector if a boot sector is infected, or Master Boot Record if an MBR of the hard drive is infected).
Threat	The names of viruses or virus modifications as per the internal classification of Doctor Web (modification of a known virus is a code resulting from such alteration of a known virus which can still be detected but cannot be cured with the algorithms applied to the initial virus). For suspicious objects, the following is displayed: indication that the object "is possibly infected" and the type of a possible virus according to the classification used by the heuristic analyzer.
Action	Click an arrow on this button to select a custom action for a detected threat (by default, Dr.Web Scanner offers the most effective action). You can apply the displayed action separately to each threat by clicking this button.
Path	The full paths to the corresponding files.



If you selected the **Automatically apply actions to threats** check box on the **Main page**, **Dr.Web Scanner** will neutralize threats automatically.



8.3. Command-Line Scanning Mode

You can run **Dr.Web Scanner** in the command-line mode that allows to specify settings of the current scanning session and the list of objects for scanning as additional parameters. Automatic activation of the **Scanner** [according to schedule](#) is performed in this mode.

To run scanning from command line

For that purpose, use the following command:

```
[<path_to_program>] dwscanner [<switches>] [<objects>]
```

where:

- <objects> is a placeholder for the list of objects to be scanned
- <switches> – are command-line parameters that specify settings of **Scanner**. If no switches are defined, scanning is performed with the settings specified earlier (or with the default settings if you have not changed them).

The list of objects for scanning can be empty or contain several elements separated by spaces.

- /FAST – perform an [express scan](#) of the system.
- /FULL – perform a full scan of all hard drives and removable data carriers (including boot sectors).
- /LITE – perform a basic scan of random access memory and boot sectors of all disks as well as run a check for rootkits.

Switches are command-line parameters that specify program settings. If no switches are defined, scanning is performed with the settings specified earlier (or with the default settings if you have not changed them). Switches begin with the forward slash (/) character and are separated by blanks as other command-line parameters.



8.4. Console Scanner

Dr.Web includes **Console Scanner** which allows you to run scanning from the command line and provides advanced settings.



Console Scanner moves suspicious files to **Quarantine**.

To run Console Scanner

The command syntax to launch **Console Scanner** is as follows:

```
[<path_to_program>]dwscancl [<switches>] [<objects>],
```

where

- <objects> is a placeholder for the list of objects to be scanned,
- <switches> is a placeholder for command-line parameters that configure **Console Scanner** operation.

Switch begins with the forward slash (/) character; several switches are separated by spaces. The list of objects for scanning can be empty or contain several elements separated by spaces.

All **Console Scanner** switches are listed in [Appendix A](#).

After the operation is complete, **Console Scanner** returns one of the following codes:

- 0—scanning completed successfully; infected objects were not found;
- 1—scanning completed successfully; infected objects were detected;
- 10—invalid keys are specified;
- 11—key file is not found or does not support **Console Scanner**;
- 12—**Scanning Engine** did not start;
- 255—scanning was aborted by user request.

8.5. Automatic Launch of Scanning

During **Dr.Web** installation, an anti-virus scan task is automatically created in the Task Scheduler (the task is disabled by default).

To view task settings, open **Control Panel** (extended view) → **Administrative Tools** → **Task Scheduler**.

From the task list, select the scan task. You can enable the task, adjust trigger time, and set required parameters.

On the **General** page, you can review general information and security options on a certain task. On the **Triggers** and **Conditions** pages, various conditions for task launching are specified. To review event log, open the **History** page.

You can also create your own anti-virus scan tasks. For details on the system scheduler operation, please refer to the Help system and Windows documentation.



If installed components include Dr.Web Firewall, after **Dr.Web** installation and the first system restart Task Scheduler will be blocked by **Firewall**. Scheduled tasks will operate only after a second restart when a new rule is already created.



9. Settings

Open the **SpIDer Agent** menu  in [administrator mode](#) and run **Settings** .

Password protection

To restrict access to **Dr.Web** settings on your computer, enable the **Protect Dr.Web settings with a password** option. In the open window, specify the password that will be required for configuring **Dr.Web**, confirm it, and click **OK**.



If you forgot your password for the product settings, contact [technical support](#).

Manage settings

To restore default settings, select **Reset settings** from the drop-down list.

If you want to use settings of **Dr.Web Anti-virus for Windows** that you already configured on another computer, select **Import** from the drop-down list.

If you want to use your settings on other computers, select **Export** from the drop-down list. Then apply them on the same page of another anti-virus.



10. Main Settings

To access the main **Dr.Web** settings, open the **SpIDer Agent** menu  in [administrator mode](#), run **Settings**  and go to **Main**.




To access the main **Dr.Web** settings, you are prompted to enter the password if you enabled the **Protect Dr.Web settings with a password** option in the [Settings](#) window.

Centralized settings adjustment allows you to configure main settings of the whole anti-virus package.

10.1. Notifications

Pop-up notifications

Enable the appropriate option to get pop-up notifications above the **SpIDer Agent** icon  in the Windows notification area.

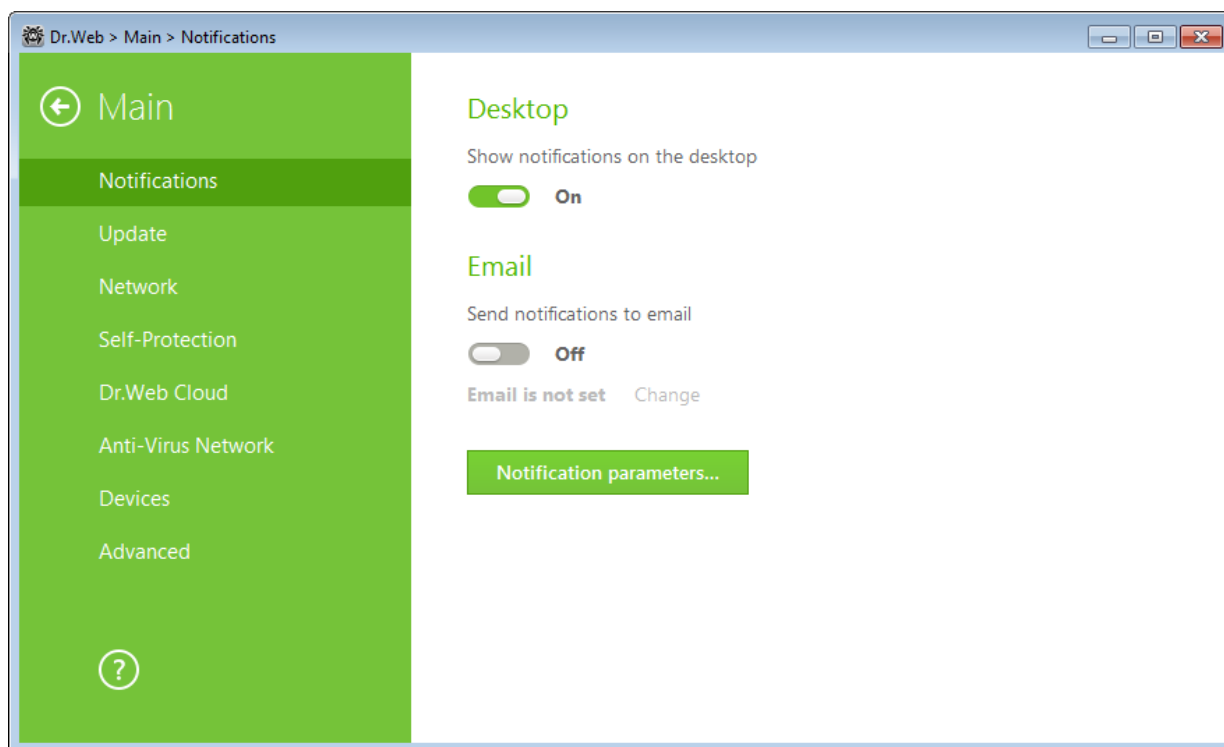

Email notifications

To configure email notifications, enable the **Send notifications to email** option.

1. Make sure that all the necessary email notifications in the **Notification parameters** window are selected.
2. Click **Change**. The window with email parameters opens.
3. Specify the email address that you want to use for receiving notifications. You will need to confirm this email address at step 8.



4. Click **Next**.
5. Specify details for the account to be used when sending email notifications.
 - 5.1. Select the mail server from the list and enter your account login and password.
 - 5.2. If the required mail server is not on the list, select **Set manually**. In the open window, fill in the required fields.

Option	Description
SMTP server	Specify the outgoing (SMTP) server for Dr.Web to use when sending email notifications.
Port	Enter the port for Dr.Web to use when connecting to the mail server.
Login	Enter the login for Dr.Web to use when connecting to the mail server.
Password	Enter the password for the login to be used when connecting to the mail server.
Use SSL/TLS	Select this check box to use SSL/TLS encryption when sending messages.
NTLM authentication	Select this check box to use NTLM authentication when connecting to the mail server.

6. Click **Send a test message** if you want to make sure that all the details are specified correctly. The message is forwarded to the email address that will be used to send notifications.
7. Click **Next**.
8. Enter the conformation code that was sent to the email address specified at step 3. If you do not receive the message within 10 minutes, click **Send the code again**. If you do not enter the code, notifications to this email address will not be sent.

Notification parameters

1. Click **Notification parameters**. The window listing available notifications opens.
2. Select types of notifications that you want to receive and select the corresponding check boxes. To display pop-up notifications, select the check boxes in the **Desktop** column. To receive mail notifications, select the check boxes in the **Email** column.
3. If necessary, configure additional parameters:

Option	Description
Notify on new tips	Select this check box to receive notifications about new tips on working with Dr.Web .
Do not show notifications in full-screen mode	Select this check box to hide notifications when an application is running in full-screen mode on your computer (e.g., a game or a movie). Clear this check box to display notifications regardless of the mode.
Display Firewall notifications on separate desktop in full-screen mode	Select this check box to display notifications from Firewall on a separate desktop when an application is running in full-screen mode on your computer (a game or a movie). Clear this check box to display notifications on the same desktop where an application is running in full-screen mode.

4. If you selected one or more email notifications, configure [sending emails](#) from your computer.



Notification type	Description
Threat notifications	Select to be notified on threats detected by SpIDer Gate and SpIDer Guard . Clear if you do not want to be notified. By default, these notifications are enabled.
Critical notifications	Select to be notified on the following critical issues: <ul style="list-style-type: none">• Failures to make a protected copy• Detection of connections waiting for Firewall to reply Clear if you do not want to be notified on the issues listed above. By default, these notifications are enabled.
Major notifications	Select to be notified on the following major issues: <ul style="list-style-type: none">• Expiration of the time limit set for working on the computer• Device is blocked• Attempt to change system date• New version is available• Virus databases are out of date Clear if you do not want to be notified on the issues listed above. By default, these notifications are enabled.
Minor notifications	Select to be notified on the following minor issues: <ul style="list-style-type: none">• Successful update• Update failures• Expiration of the time limit set for Internet use• URL is blocked by Parental Control• URL is blocked by SpIDer Gate• An attempt to access a protected object is blocked by Parental Control• An attempt to access a protected object is blocked by Preventive Protection Clear if you do not want to be notified on the issues listed above. By default, these notifications are disabled.
License	Select to be notified on the following issues: <ul style="list-style-type: none">• Expiration of your license period• Valid license is not found• The current license is blocked




Notifications on the following issues are not included in any of the specified groups and are always displayed to the user:

- Priority updates installed and restart is required.
- Request for allowing a process to modify an object.
- Successful connection to a remote computer in the Anti-virus Network.
- You activated a trial version. It is recommended to obtain a license.
- The current license is blocked.



10.2. Update

On this page, you can configure **Dr.Web** to update parameters such as components that should be updated, an updating source, update period, proxy server, and update mirror.

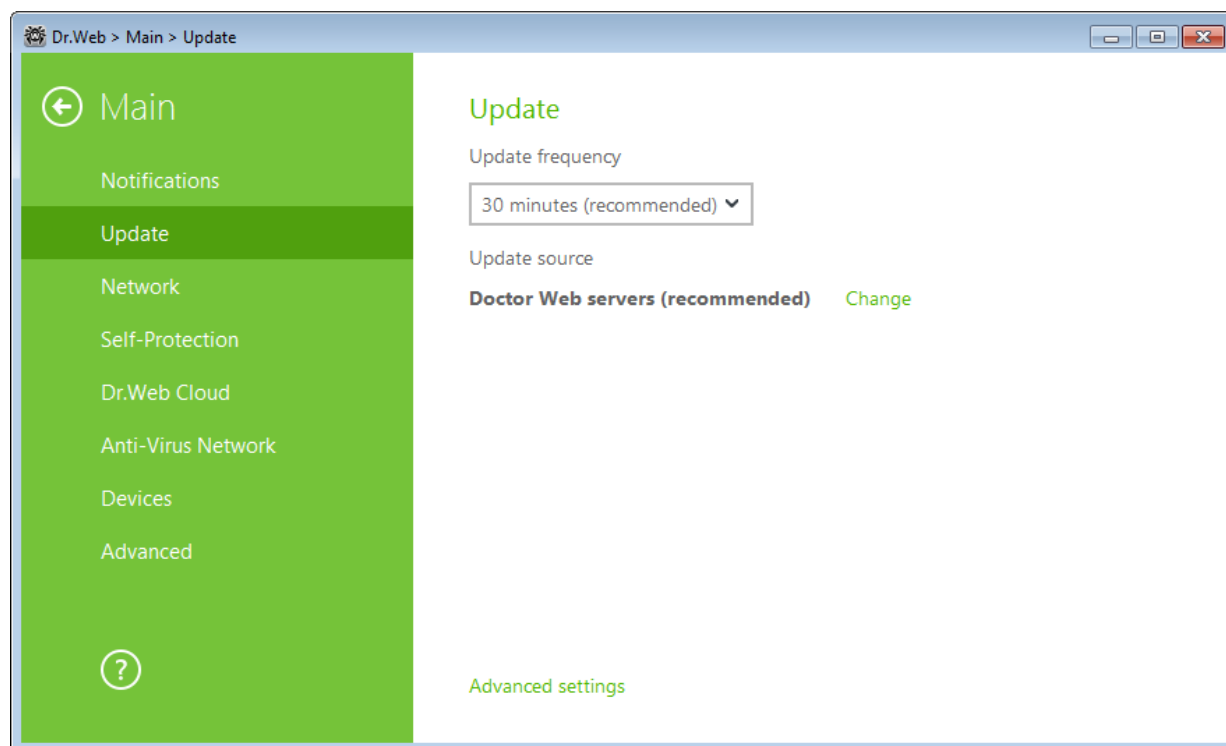

General update settings

Update frequency. Specify the frequency to check for updates. The default value (30 minutes) is optimal to keep information on threats up to date.

To select an update source, click Change. In the open window, select one of the following update sources:

- **Internet (recommended)** – updates are to be downloaded from **Doctor Web** servers.
- **Local or network folder**—update from local or network folder where updates have been copied. To specify the path to the folder, click **Browse** and select the required folder, or enter the address manually. Enter the user name and password if necessary.
- **Anti-virus Network** – updates are to be downloaded from a local network computer if Dr.Web product is installed and update mirror is created on it.

If you want to download updates via a secure protocol, select the **Use HTTPS connection** check box.

To configure additional settings

Updating components. You can choose one of the following ways of downloading the update:

- **All (recommended)**, when updates are downloaded both for **Dr.Web** virus databases and anti-virus engine and for other program components of the **Dr.Web**.
- **Only virus databases**, when only the updates for **Dr.Web** virus databases and the anti-virus engine are downloaded; other components of **Dr.Web** are not updating.



Creating update mirror


To allow other local network computers with installed **Dr.Web** products to use your computer as an update source, open **Advanced settings** and enable the appropriate option. Click **Change** to specify the path to the folder where updates will be copied. If your computer is connected to several subnets, you can specify IP address available to computers of only one subnet. You can also specify the port for HTTP connections.

10.3. Network

Proxy server

By default, all components use direct connection mode. If necessary, you can enable use of a proxy server and specify its connection settings. Click **Change** to specify the following proxy server parameters:

Option	Description
Address	Specify the address of the proxy server.
Port	Specify the port of the proxy server.
User	Specify the username to use when connecting to the proxy server.
Password	Specify the password to use when connecting to the proxy server under the provided username.
Authorization type	Select an authorization type required to connect to the proxy server.

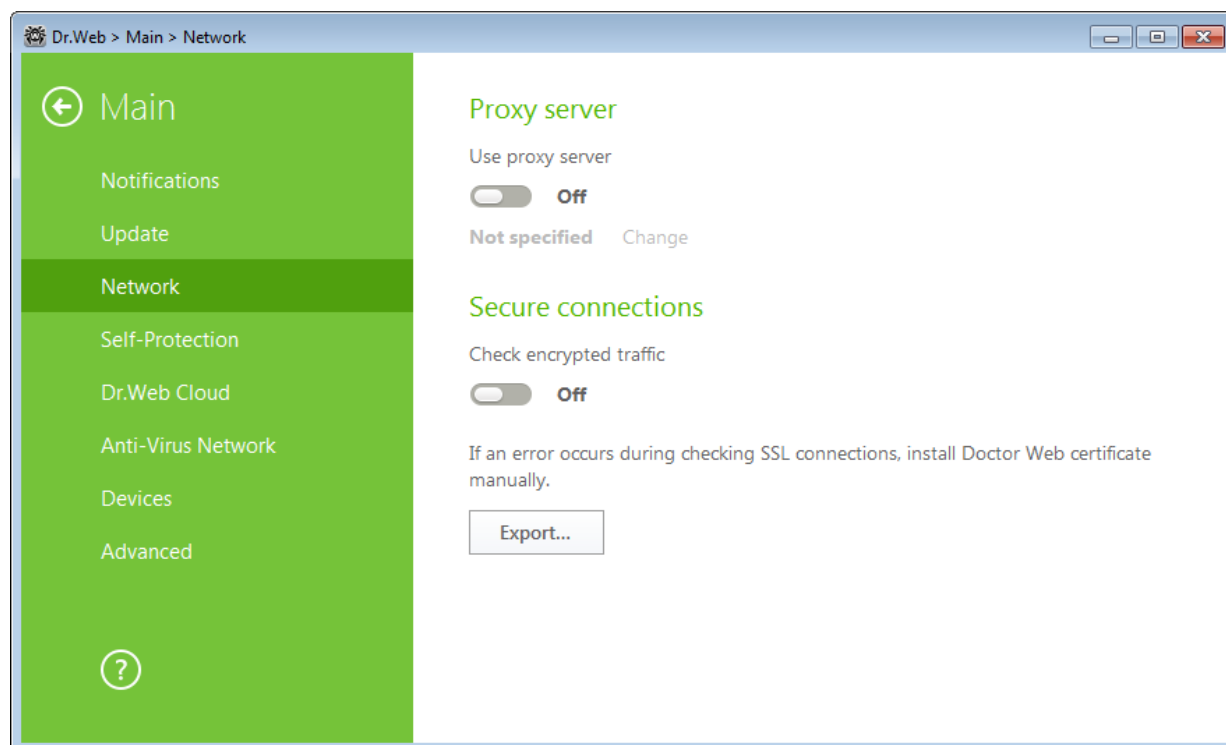



Secure connections

You can enable scanning of data transmitted over secure protocols. To check such data, select the appropriate check box. If your client application that uses secure connections does not refer to the default Windows system certificate storage, then you need to export the certificate.


Doctor Web certificate

You may need to scan data transmitted in accordance with SSL protocol. For instance, you can configure **SpIDer Gate** to check encrypted data transferred over HTTPS protocol and configure **SpIDer Mail** to check messages sent over POP3S, SMTPS, or IMAPS. In order for **Dr.Web** to scan such encrypted traffic and maintain transparent integration with some browsers and mail clients that do not refer to the Windows system certificate storage, it may be necessary to import **Doctor Web** SSL certificate into the application certificate storages. To save the certificate from the system storage for future use in third party applications, click **Export** and select a convenient folder.



10.4. Self-Protection

On this page, you can configure protection of **Dr.Web** itself from unauthorized modification by anti-virus programs or accidental damage.

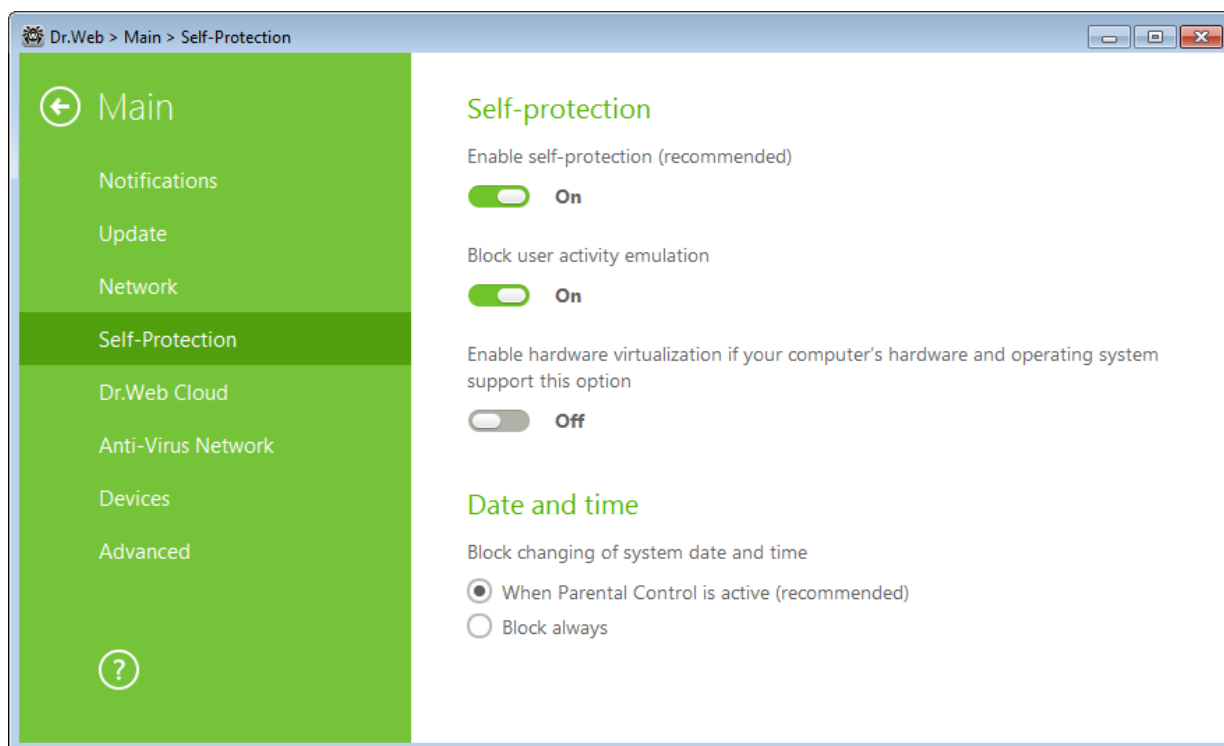

Self-protection

The **Enable Self-protection** option allows to protect **Dr.Web** files and processes from unauthorized access. It is not recommended to disable Self-protection.



If any problems occur during operation of defragmentation programs, disable self-protection temporary.

To rollback to a system restore point, disable self-protection.

The **Block user activity emulation** option allows to prevent any automatic changes in **Dr.Web** operation, including execution of scripts that emulate user interaction with **Dr.Web** and are launched by the user.

The **Enable hardware virtualization** option allows to take full advantage of computer resources, which makes detection and curing of threats easier and enhances self-protection of **Dr.Web**. To enable this option, restart the computer.


Date and time

The **Block changing of system date and time** option allows to prevent manual and automatic changes of the system date and time as well as of the time zone. This restriction is set for all system users. The option can improve performance of the time limit function implemented in **Parental Control**. If Internet or computer usage limits are set in **Parental Control**, this option is automatically enabled. You can configure [notification parameters](#) so that to be informed on attempt to change the system time.



10.5. Dr.Web Cloud

On this page, you can connect to **Doctor Web** cloud services and take part in **Dr.Web** quality improvement program.

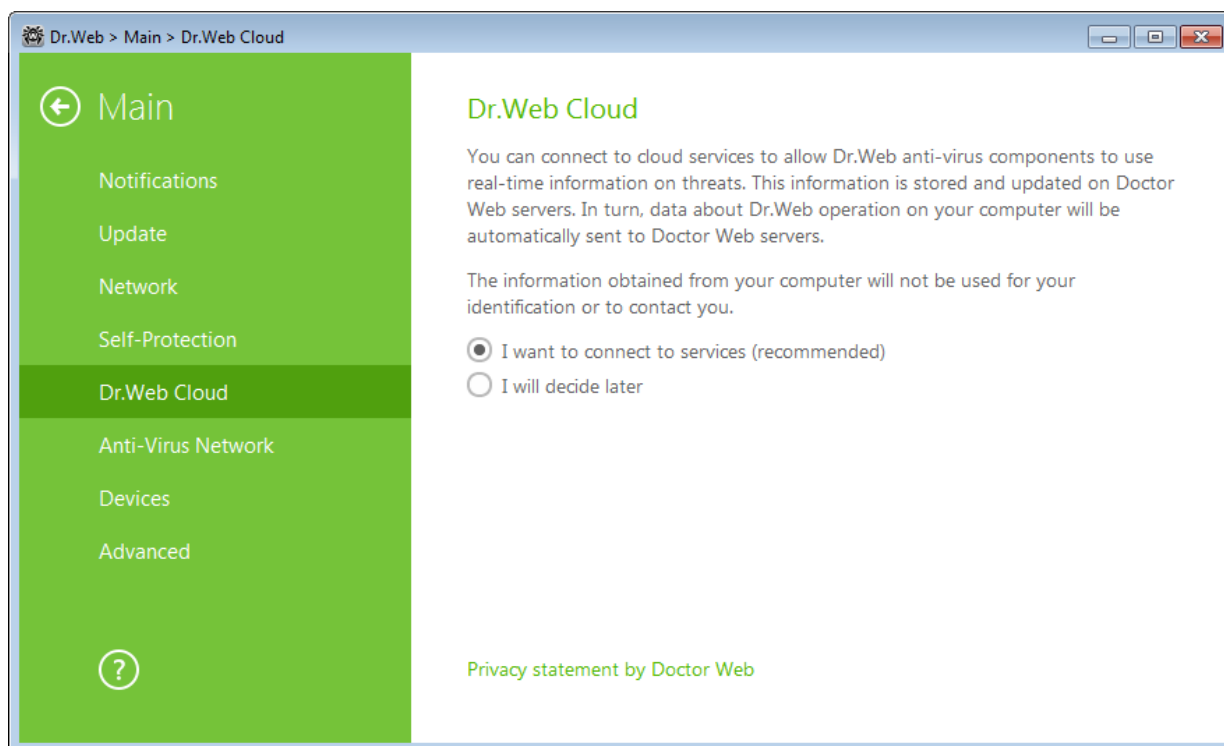

Cloud services

Dr.Web Cloud provides most recent information on threats which is updated on **Doctor Web** servers in real-time mode and used for anti-virus protection.

Depending on [update settings](#), information on threats used by anti-virus components may become out of date. Cloud services can reliably prevent users from viewing unwanted websites and protect your system from infected files. from and from.

Software quality improvement program


If you participate in the software quality improvement program, impersonal data about **Dr.Web** operation on your computer will be periodically sent to **Doctor Web** servers, for example, information on created rule sets for **Dr.Web Firewall**. Received information is not used to identify or contact you.

Click the **Privacy statement by Doctor Web** link to look through a privacy statement on the **Doctor Web** official [website](#).



10.6. Anti-virus Network

On this page, you can enable remote control of your anti-virus from other local network computers by [Anti-virus Network](#). If your computer is connected to an anti-virus network, you can control anti-virus protection state remotely (view statistics, enable or disable **Dr.Web** components and adjust their settings) and download updates from a local network computer. To allow local network computers with installed **Dr.Web** products to use a computer as an update source, configure an [update mirror](#) on it.

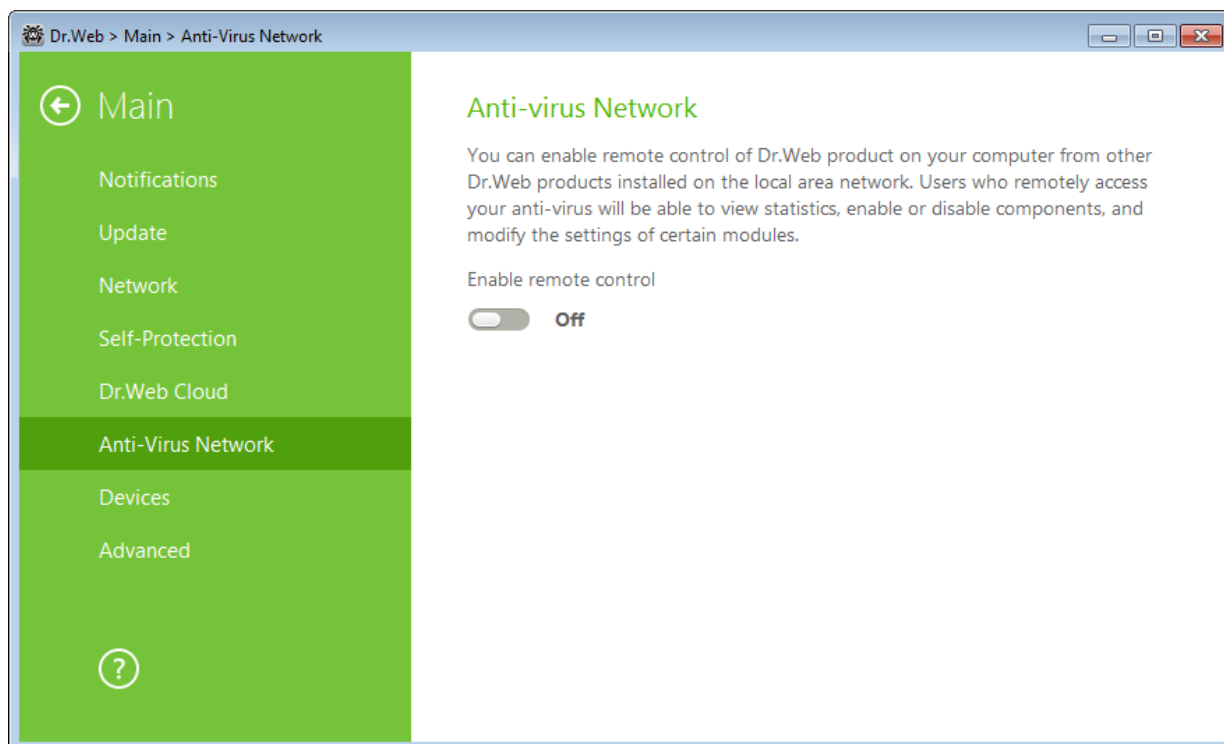


For remote access to **Dr.Web** settings on your computer, the password is required. You may use the password that is automatically generated when the option is enabled or set a new one.



10.7. Devices



Access control configurations are applied to all Windows accounts.

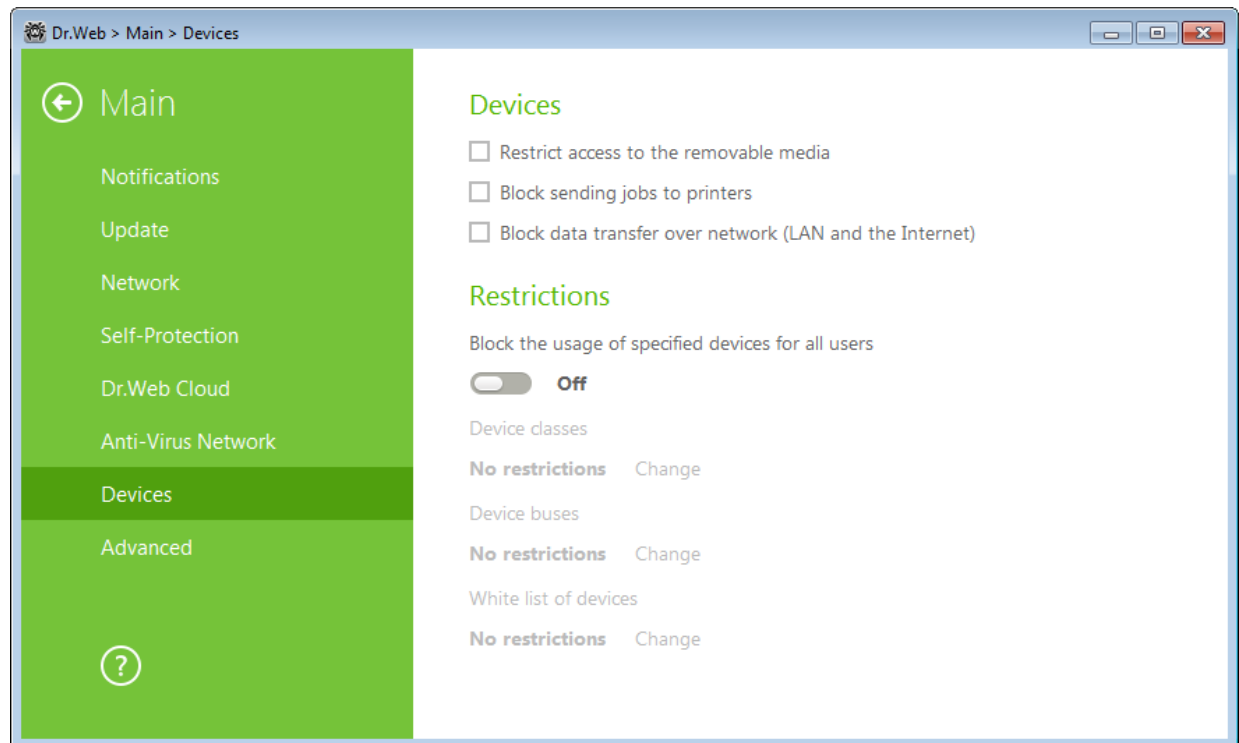

Devices

To block access to data on removable media (USB flash, floppy, CD/DVD, ZIP drives, etc.), enable the appropriate option. To block sending jobs to printers, select the **Block sending jobs to printers** check box. This option is disabled by default. You can also block data transfer over network (LAN and the Internet).

Device and bus classes






To block access to specified device or bus classes, enable the appropriate option. Click the **Change** button to make a list of such objects. In the open window, select device or bus classes that you want to restrict access to. Click **OK** to save the changes. To close the window without saving the changes, click **Cancel**.

White list of devices

After you restricted access to some device or bus classes, you can allow access to certain devices by adding them to the white list. For that, do the following:

1. Click the **Change** button next to **White list of devices** (the button becomes available if restrictions are set).
2. Make sure that the device is connected to the computer.




3. Click . In the open window, click **Browse** and select the device. You can use a filter to view only connected or only disconnected devices. Click **OK**.
4. You can configure access rules for devices with file systems. For that, from the **Rule** column, select one of the following modes: **Allow all** or **Read-only**. To add a new rule for a specific user, click . To delete a rule, click .
5. To save the changes, click **OK**. To close the window without saving the changes, click **Cancel**. The white list of devices opens.
6. To edit a rule set, select it from the list and click .
7. To remove a rule set, select it from the list and click .



10.8. Advanced

On this page, you can select a language for the settings, configure logging options and **Quarantine** settings.

To set another program language, select it from the corresponding drop-down list. New languages are automatically added to the list. Thus, it contains all localization languages that are currently available for the **Dr.Web** graphical interface.

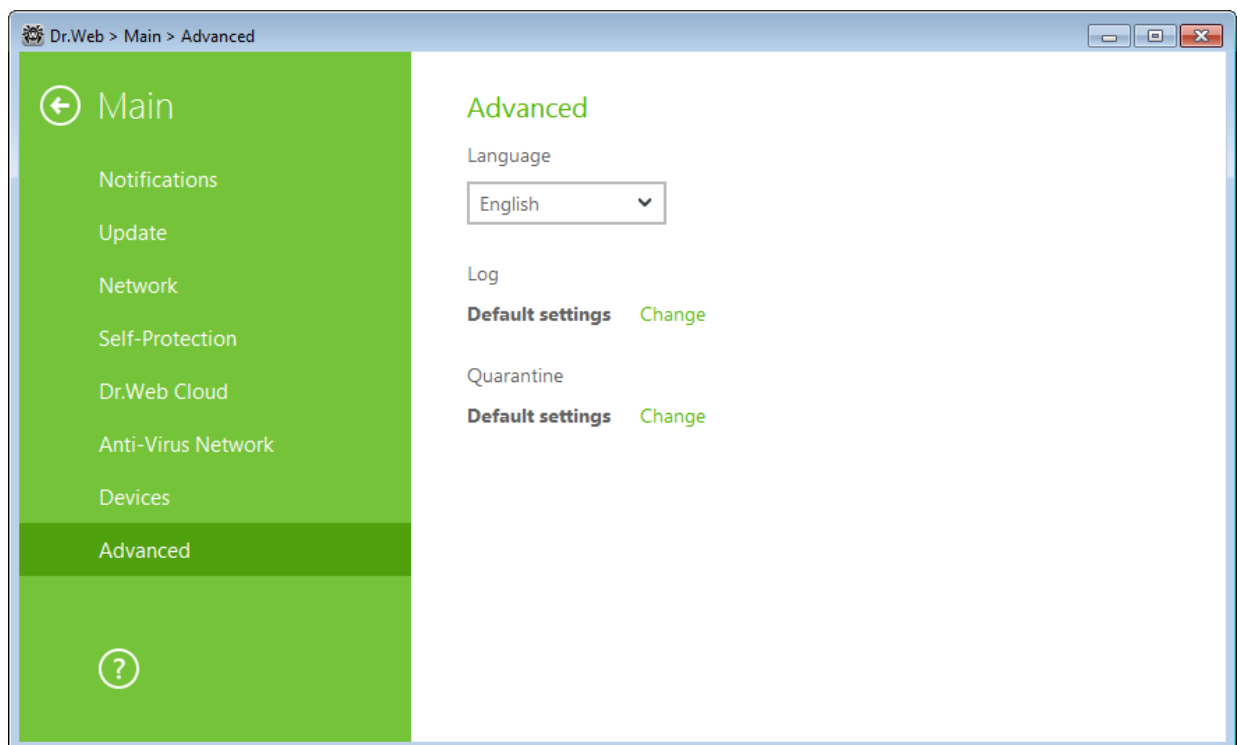

Log settings

To configure log settings, click the corresponding **Change** button.



By default, size of a log file is restricted to 10 MB. If the log file size exceeds the limit, the content is reduced to:

- Specified size if the current session information does not exceed the limit.
- Size of the current session if the session information exceeds the limit.

By default, the standard logging mode is enabled and the following information is logged:

Component	Information
SpIDer Guard	<p>Time of updates and SpIDer Guard starts and stops, virus events, names of scanned files, names of packers, and contents of scanned complex objects (archives, email attachments, file containers).</p> <p>It is recommended to use this mode to determine the most frequent objects scanned by SpIDer Guard. If necessary, you can add these objects to the list of exclusions in order to increase computer performance.</p>



Component	Information
SpIDer Mail	Time of updates and SpIDer Mail starts and stops, virus events, connection interception settings, names of scanned files, names of packers, and contents of scanned archives. It is recommended to use this mode when testing mail interception settings.
SpIDer Gate	Time of updates, starts and stops of SpIDer Gate , virus events, connection interception settings, names of scanned files, names of packers, and contents of scanned archives. It is recommended to use this mode for reception of more detailed information on the checked objects and work of the HTTP watchman.
Firewall	Firewall does not log its operation in the standard mode. When you enable detailed logging, the component collects data on network packets (pcap logs).
Dr.Web Update	List of updated Dr.Web files and their download status, date and time of updates, and details on auxiliary script execution and Dr.Web component restart.
Dr.Web Service	Information on Dr.Web components, changes in their settings, component starts and stops, preventive protection events, connections to anti-virus network.

Memory dump creation

The **Create memory dumps at scan errors** option allows to save useful information on operation of several **Dr.Web** components. This helps **Doctor Web** technical support specialists analyze an occurred problem in detail and find a solution. It is recommended to enable this option on request of **Doctor Web** technical support specialists or when errors of scanning or neutralizing occur. Memory dump is saved to .dmp file located in the %PROGRAMFILES%\Common Files\Doctor Web\Scanning Engine\ folder.

Enabling detailed logging



Upon logging detailed data on **Dr.Web** operation, the maximum amount of information is recorded. This will result in disabling of log file size limitations and will have an impact on system and **Dr.Web** performance. It is recommended to use this mode only when errors occur in component operation or by request of **Doctor Web** technical support.

1. To enable detailed logging for a **Dr.Web** component, select the corresponding check box.
2. By default, detailed logging is enabled until the first restart of the operating system. If it is necessary to log component activity before and after the restart, select the **Continue detailed logging after restart (not recommended)** check box.
3. Save the changes.

Quarantine settings

To configure **Quarantine** settings, click the corresponding **Change** button.

You can configure **Dr.Web Quarantine**, estimate its size, and delete isolated files from a specified logical drive.

Folders of Quarantine are created separately on each logical drive where suspicious files are found.

To empty Quarantine

1. To remove all quarantined files on a particular drive, select the drive from the list.
2. Click **Clear** and confirm the deletion when prompted.

You can also select the isolation mode for infected objects detected on portable data carriers. When this option is enabled, detected threats are moved to the folder on this data carrier without being encrypted.



The **Quarantine** folder is created on portable data carriers only when they are accessible for writing. The use of separate folders and omission of encryption on portable data carriers prevents possible data loss.



11. Parental Control

To configure **Parental Control**, open the **SpIDer Agent** menu  in administrator mode, run **Settings**  and go to **Parental Control**.

The **Parental Control** component allows you to restrict access to websites, files, and folders. You can also set time limits on using the Internet and computer for certain Windows accounts.

By restricting access to the local file system, you can maintain integrity of important files, protect them from viruses, and secure confidentiality of stored data. You can limit access to separate files or folders on local drives and external data carriers.

By controlling access to web resources, you can restrict a user from viewing undesirable websites (for example, pages on violence, gambling, adult content, etc.) or allow access to certain websites only that are specified in the **Parental Control** settings.


You can also connect to **Doctor Web** cloud services that allow anti-virus components to use the latest information on threats. This information is stored and updated on **Doctor Web** servers in real-time mode.



11.1. Configuring Parental Control



To manage **Parental Control**, the password is required if you enabled the **Protect Dr.Web settings with a password** option on the [Settings](#) page.

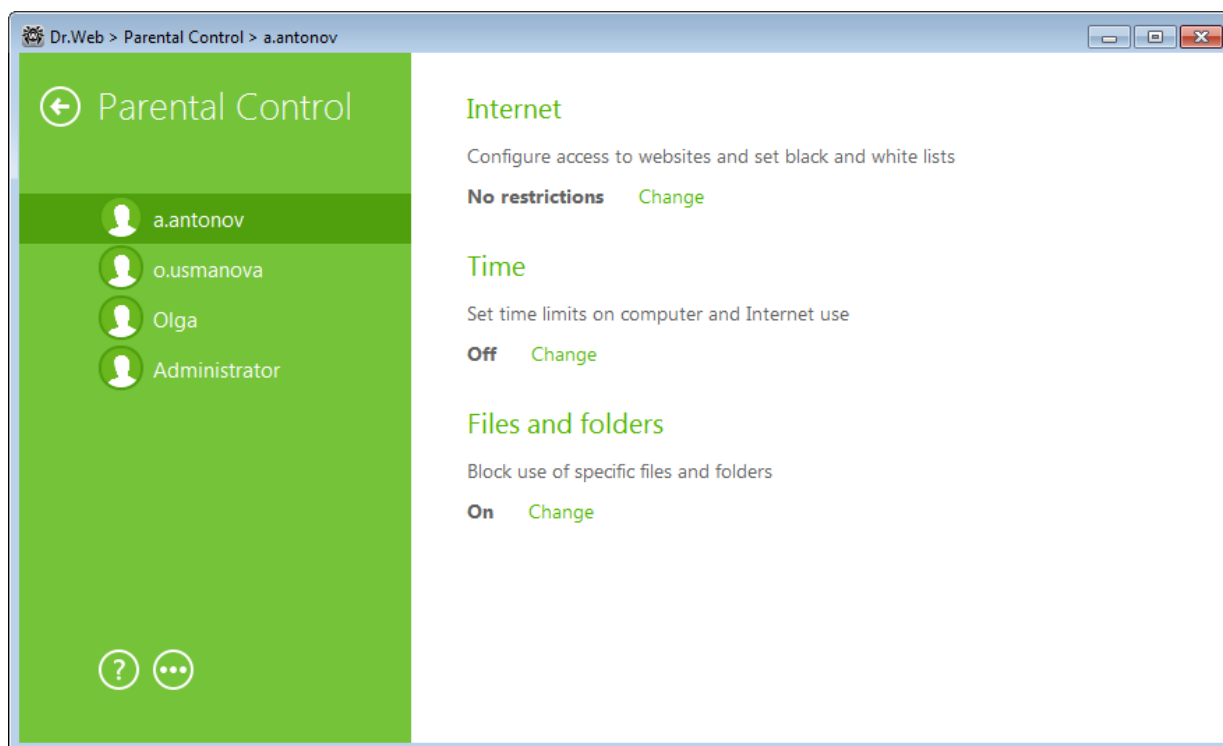


Configuring Parental Control parameters for different users

To configure access restriction for a user, select the user name in the left pane. In the main part of the window, you can view the settings specified for this user. By default, access to the Internet and to local resources is not restricted for all users of the computer; no time limits are set. To change these settings, click **Change** next to the desired option.



If necessary, you can [configure](#) desktop and email notifications on **Parental Control** actions.

Quick setup

By clicking  you can access the menu that allows you to:

- Copy restriction settings configured for one user and apply them to another user profile. For that, select **Copy settings** and **Use copied settings**.
- Disable **Parental Control** for the selected user. For that, select **Disable Parental Control**. Using this menu, you can enable **Parental Control** with the same settings again.



Internet

By default, the **No restrictions** mode is set for every user. To change these settings, select another mode from the drop-down list.

Block by categories

In this mode, you can select categories of websites to block. You can also add websites to the manually populated black and white lists to block or allow access to the resources regardless of other restrictions.

Block all except websites from the white list

In this mode, you grant access to the websites from the white list only. Access to any other website is blocked.

Safe search

In any mode except the **No restrictions** mode, you can enable the **Safe search** option to manage results of the search engines. This option allows to exclude unwanted webpages from search results.

Time

On this page, you can set restrictions on time spent on the Internet or working on the computer.


By default, no time limits on computer and Internet use are set.

To set time limits

1. Select days of week and time when the user is restricted from using the Internet, and then mark the corresponding timeslots blue.
 - To mark one timeslot, click it once.
 - To mark several adjacent timeslots, click the first slot once and select the rest of required squares while holding down the mouse button.
2. Select days of week and time when the user is restricted from using the computer, and then mark the corresponding timeslots red.
 - To mark one timeslot, double-click it.
 - To mark several adjacent timeslots, double-click the first one and select the rest of required timeslots while holding down the mouse button.

You can also create different setting profiles for one user. This option allows you to easily switch between existing setting profiles (for example, you can set different time limits for the academic year and school holidays).

To create a setting profile

1. Select the **No restrictions** mode or a user profile from the list.
2. Edit the table as necessary.
3. Click .
4. Enter a name for the created profile and click **OK**.

Specifying time intervals

If you want to specify the total number of hours when the user is allowed to work on the computer,



select the **Interval time limit** option. Please note that this mode does not allow to set time limits on Internet use.

In this mode, you can set time limits on computer use during the following periods:

- From Monday till Friday
- Saturday and Sunday

You can also restrict a user from accessing the computer during the night-time period regardless of the total number of hours when access is allowed.


This option allows you to let your child manage the time spent working on the computer during the day by themselves.




Setting time limits for using the computer or the Internet automatically enables the **Block changing of system date and time** option on the [Self-protection](#) page of the main settings.

Files and Folders

By default, the **No restrictions** mode is set for all users. To configure restriction parameters, enable the appropriate option and click **Objects**.

To add an object to the list, click  and select a file or a folder. By default, an added object will become read only.

To block access to the selected object completely, click the restriction and select **Blocked** from the drop-down list.

To remove an object from the list, select it and click .


Please note that access blocking is not guaranteed when loading the computer from portable media or addressing the objects from other operating systems installed on your computer.



12. Exclusions

12.1. Websites

If you want to have access to the websites that are not recommended to visit by **Doctor Web**, add them to the exclusions. The access to the listed websites will be allowed, but the sites will be still checked for viruses. By default, the list is empty. If you add a website to the white list, users will be able to access it regardless of other **SpIDer Gate** settings. Please note that if the site is added both to the black list of **Parental Control** and to the exclusions, access will be blocked.

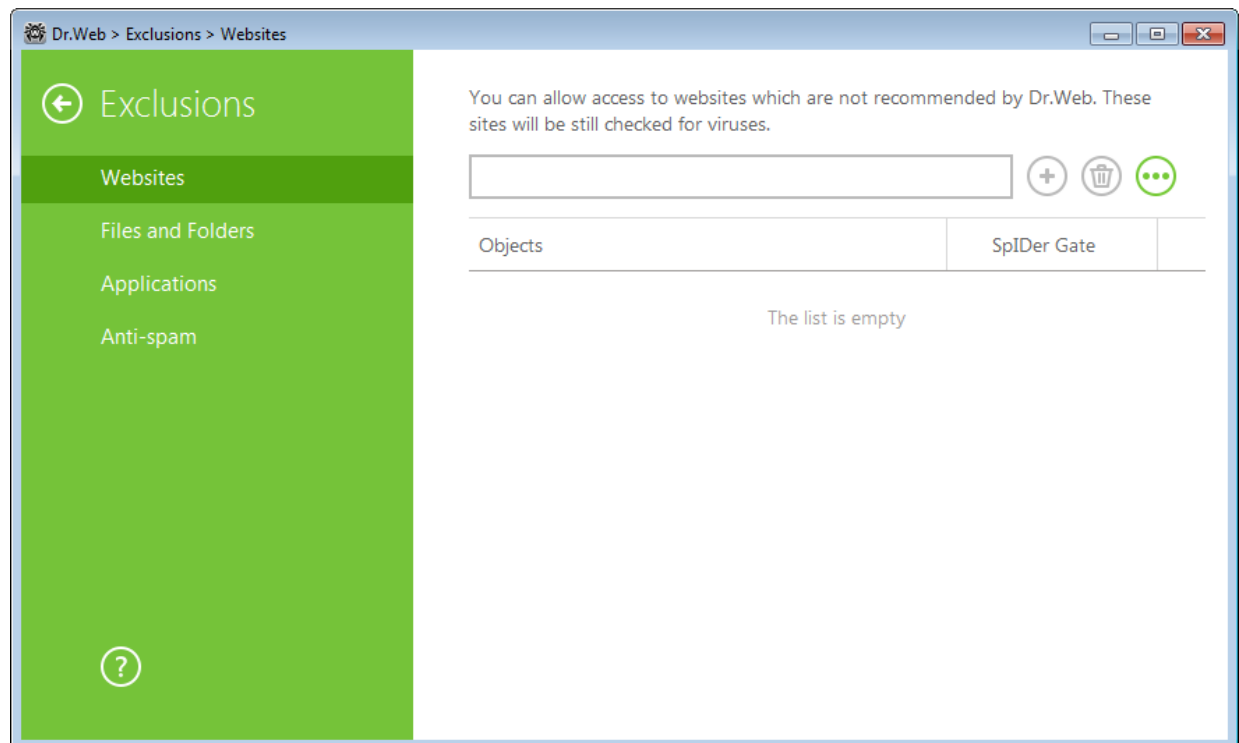


To configure black and white lists

1. Enter a domain name or a part of a domain name for the website that you want to access regardless of other restrictions.
 - To add a certain website, enter its name (for example, `www.example.com`). This allows access to all webpages located on this website.
 - To allow access to websites with similar names, enter the common part of their domain names. For example, if you enter `example`, then **SpIDer Gate** will allow access to **example.com**, **example.test.com**, `test.com/example`, `test.example222.com`, and other similar websites.
 - To allow access to websites within a particular domain, enter the domain name with a period (.) character. This allows access to all webpages located on this website. If the domain name includes a forward slash (/), the substring before the slash is considered a domain name, while the substring after the slash is considered a part of address for the websites that you want to access within this domain. For example, if you enter `example.com/test`, **SpIDer Gate** will allow access to such webpages as **example.com/test11**, `template.example.com/test22`, and so on.


Your input may be unified.

2. Click . The address will appear on the list.



3. To add other addresses, repeat steps 1 to 2. To remove an address from the white list, select the corresponding item and click .

Managing listed objects


Click  to access the following options:

- **Export**—allows to save the created list of exclusions to be used on another computer where **Dr.Web** is installed.
- **Import**—allows to use the list of exclusions created on another computer.
- **Clear all**—allows to remove all objects from the list of exclusions.


12.2. Files and Folders

In this section, you can manage the list of files and folders to be excluded from scanning by **SpIDer Guard** and **Scanner**. You can exclude the anti-virus quarantine folders, working folders of some programs, temporary files (paging file), and so on.

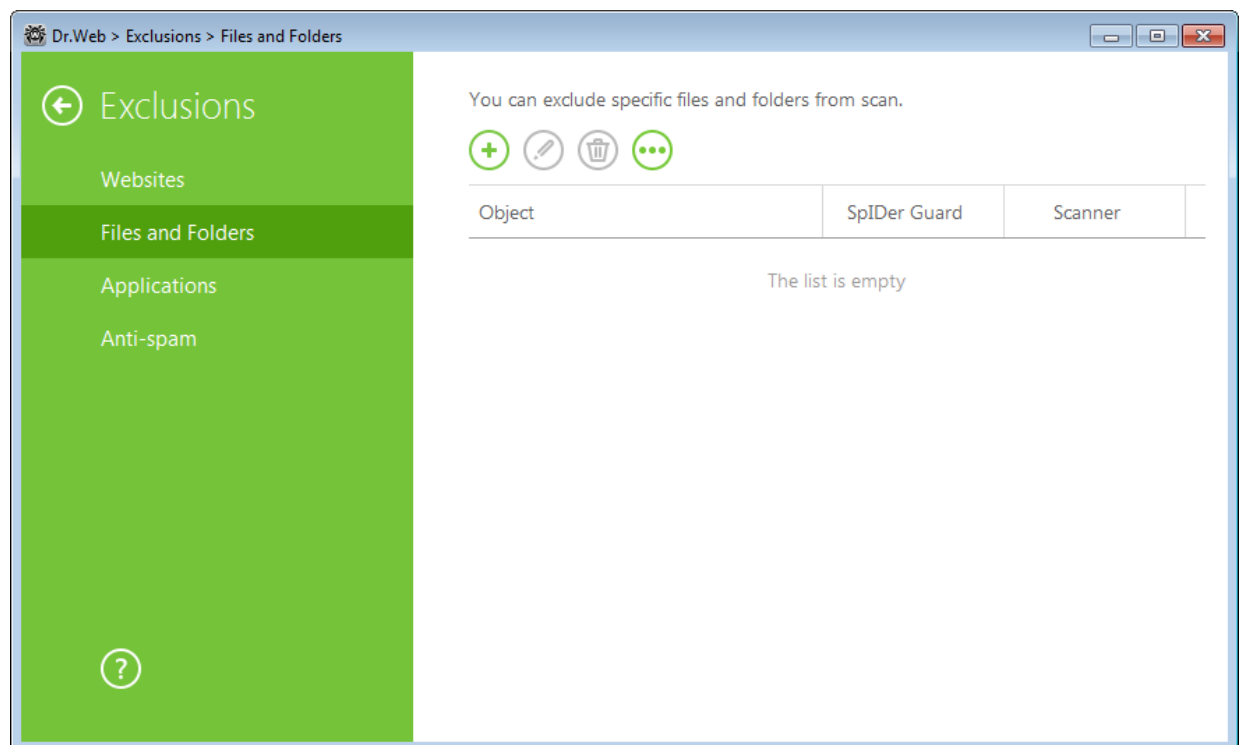

The default list is empty. Add particular files and folders to exclusions or use masks to disable scanning of a certain group of files. Any added object can be excluded from the scanning of both components or from scanning of each component separately.



Configuring list of exclusions

1. To add a file or folder to the exclusion list, do one of the following:
 - To add an existing file or folder, click . In the open window, click **Browse** and select the item in the standard dialog window. You can enter the full path to the file or folder, or edit the path in the field before adding it to the list.
 - To exclude all files or folders with a particular name, enter the name without path.
 - To exclude a group of files or folders, enter the mask of their names.



2. In the configuration window, specify the components that must not scan this file.
3. Click **OK**. The file or folder will appear on the list.
4. To edit an existing exclusion, select the corresponding item from the list and click .
5. To list other files and folders, repeat steps 1 to 2. To remove a file or folder from the list, select the corresponding item and click .


A mask denotes the common part of object names, at that:

- The asterisk (*) character replaces any, possibly empty, sequence of characters.
- The question mark (?) replaces any character (one).
- Other mask characters do not replace anything and mean that in this place the name must contain this particular character.

Examples:

- `C:\folder` or `C:\folder**`—excludes from scanning all files stored in `C:\folder`. The files stored within subfolders will be scanned.
- `C:\folder*`—excludes all files located in `C:\folder` and its subfolders.
- `C:\folder*.txt`—excludes all *.txt files stored in `C:\folder`. The *.txt files stored within subfolders will be scanned.
- `C:\folder**.txt`—excludes all *.txt files stored in the first-level subfolders of `C:\folder`.
- `C:\folder***.txt`—excludes all *.txt files stored in subfolders of any level within `C:\folder`. The files stored in `C:\folder` itself, including *.txt files, will be still scanned.

Managing listed objects

Click  to access the following options:


- **Export**—allows to save the created list of exclusions to be used on another computer where **Dr.Web** is installed.
- **Import**—allows to use the list of exclusions created on another computer.
- **Clear all**—allows to remove all objects from the list of exclusions.



12.3. Applications

You can specify a list of programs and processes to be excluded from scanning by **SpIDer Guard**, **SpIDer Gate**, and **SpIDer Mail**.

By default, the list is empty.

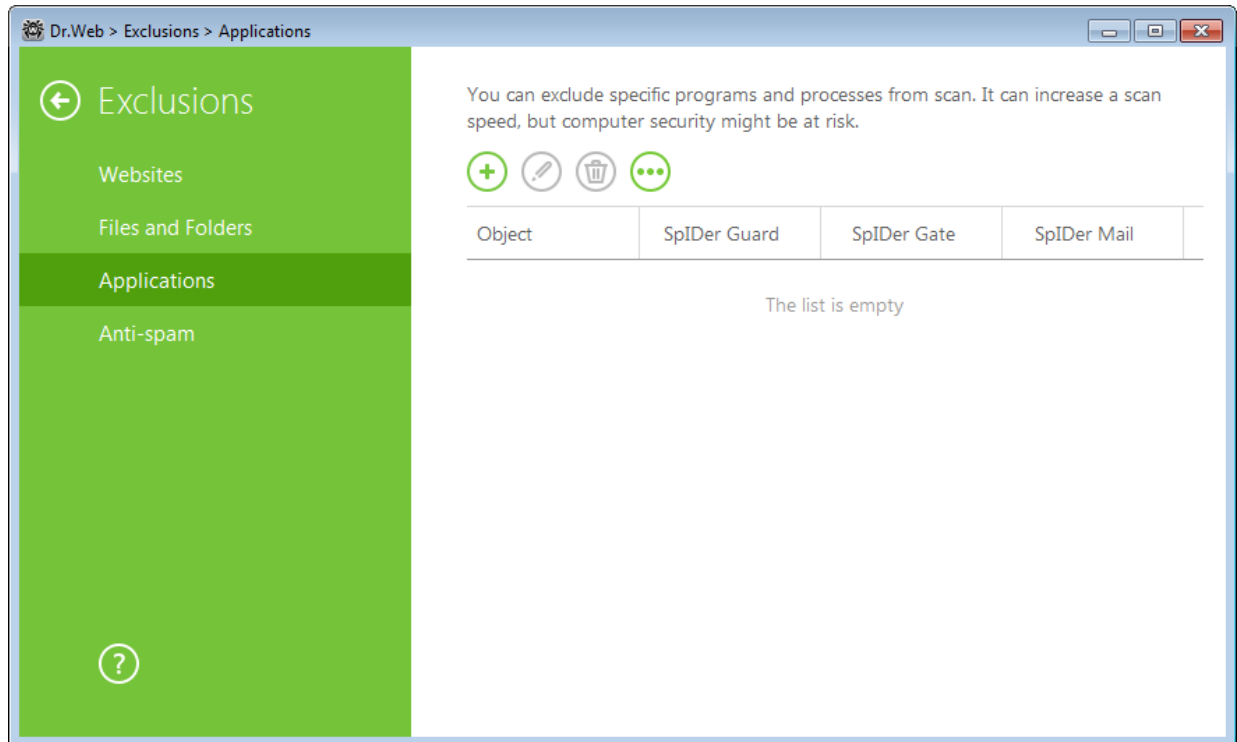



Configuring list of exclusions


1. To add a program or a process to the exclusion list, click . In the open window, click **Browse** and select a file in the standard dialog window.
2. In the configuration window, specify the components that must not scan this file. For objects excluded from scanning by **SpIDer Gate** and **SpIDer Mail**, specify additional parameters.

Parameter	Description
Regardless of whether the application has a digital signature	Select this parameter to exclude the application from scanning regardless of whether it has a valid digital signature or not.
If the application has a valid digital signature	Select this parameter to exclude the application from scanning only if it has a valid digital signature. Otherwise, the application will be scanned by the components.
Any traffic	Select this parameter to exclude encrypted and non-encrypted application traffic from scanning.
Encrypted traffic	Select this parameter to exclude only encrypted application traffic from scanning.
On all IP addresses and ports	Select this parameter to exclude traffic on all IP addresses and ports from scanning.




Parameter	Description
On specific IP addresses and ports	Select this parameter to exclude specific IP addresses and ports from scanning. Traffic on other IP addresses and ports will be scanned (unless specified otherwise).

3. Click **OK**. The process or program will appear on the list.
4. If necessary, repeat the procedure to add other programs.
5. To edit an existing exclusion, select the corresponding item from the list and click .
6. To remove a file from the list, select the corresponding item and click .

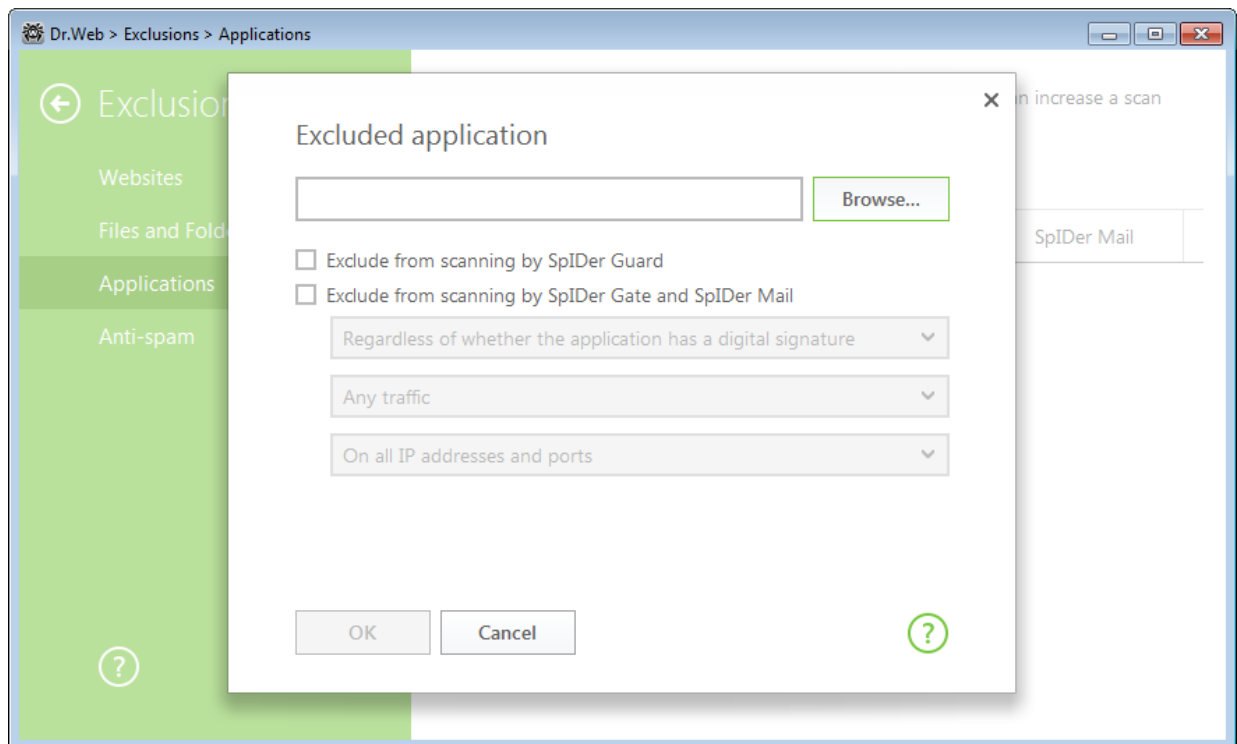

Managing listed objects


Click  to access the following options:

- **Export**—allows to save the created list of exclusions to be used on another computer where **Dr.Web** is installed.
- **Import**—allows to use the list of exclusions created on another computer.
- **Clear all**—allows to remove all objects from the list of exclusions.



12.4. Anti-spam

In this window, you can configure lists of senders whose messages are delivered or blocked by **SpIDer Mail** automatically (that is, without analyzing their contents).

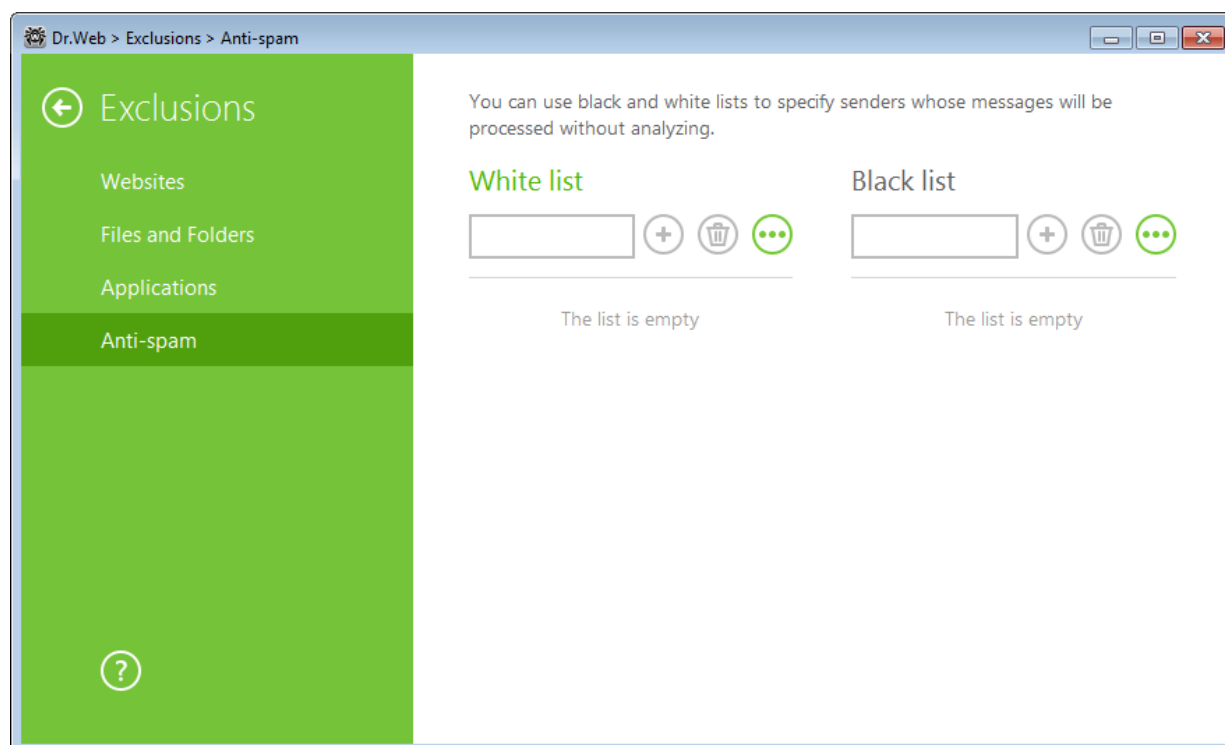
If you add an address to the white list, messages from the sender will be always delivered to recipients. If you add an address to the black list, all messages from the sender will be regarded as spam automatically (that is, without scanning). By default, both lists are empty.



To configure anti-spam lists

1. Enter an address or a mask for addresses of senders whose email messages you want to process automatically without analysis.
 - To add a certain sender, enter the full email address (for example, `name@mail.com`). This ensures automatic processing of all messages from this sender without analysis.
 - To add senders with similar usernames, replace the differing part of their addresses with an asterisk (*) and a question mark (?). Use an asterisk (*) to substitute any character sequence or a question mark (?) to substitute any single character. For example, if you enter `name*@mail.com`, **SpIDer Mail** will process automatically messages from **name@mail.com**, **name1@mail.com**, **name_of_name@mail.com** and senders with other similar usernames.
 - To process automatically all messages sent from any email address within a domain, use an asterisk (*) instead of the username in the address. For example, to specify all messages sent from any email address within the mail.com domain, enter `*@mail.com`.
2. To add the entered address to the list, click .
3. To add other addresses, repeat steps 1 to 2. To remove an address from the list, select the corresponding item and click .

Managing listed objects

Click  to access the following options:

- **Export**—allows to save the created list of exclusions to be used on another computer where **Dr.Web** is installed.
- **Import**—allows to use the list of exclusions created on another computer.
- **Clear all**—allows to remove all objects from the list of exclusions.



13. Protection Components

13.1. SpIDer Guard

SpIDer Guard is an on-access anti-virus scanner that constantly resides in memory while scanning files and RAM "on the fly" and instantly detects any malicious activity.

With the default settings, the component performs on-access scans of files that are being created or changed on the hard drives and all files that are opened on removable media. Moreover, SpIDer Guard constantly monitors running processes for virus-like activity and, if such is detected, blocks malicious processes and reports on the event. On detection of an infected object, **SpIDer Guard** processes it according to the specified settings.

Files within archives and mailboxes are not scanned. If a file within an archive or email attachment is infected, the malicious object will be detected and neutralized by **SpIDer Guard** immediately when you try to extract the archived files or download the attachment. To prevent spread of viruses and other malicious objects with email, [use SpIDer Mail](#).

On detection of an infected object, **SpIDer Guard** applies actions to them according to the [specified settings](#). You can change settings to configure automatic reaction to different virus events.

You can also [connect](#) to **Doctor Web** cloud services that allow anti-virus components to use the latest information on threats. This information is stored and updated on **Doctor Web** servers in real-time mode.


By default, **SpIDer Guard** loads automatically when Windows starts and cannot be unloaded during the current Windows session.

13.1.1. Configuring SpIDer Guard



To access **SpIDer Guard** settings, you are prompted to enter the password if you enabled the **Protect Dr.Web settings with a password** option in the [Settings](#) window.

The default settings are optimal for most cases. Do not change them unnecessarily.

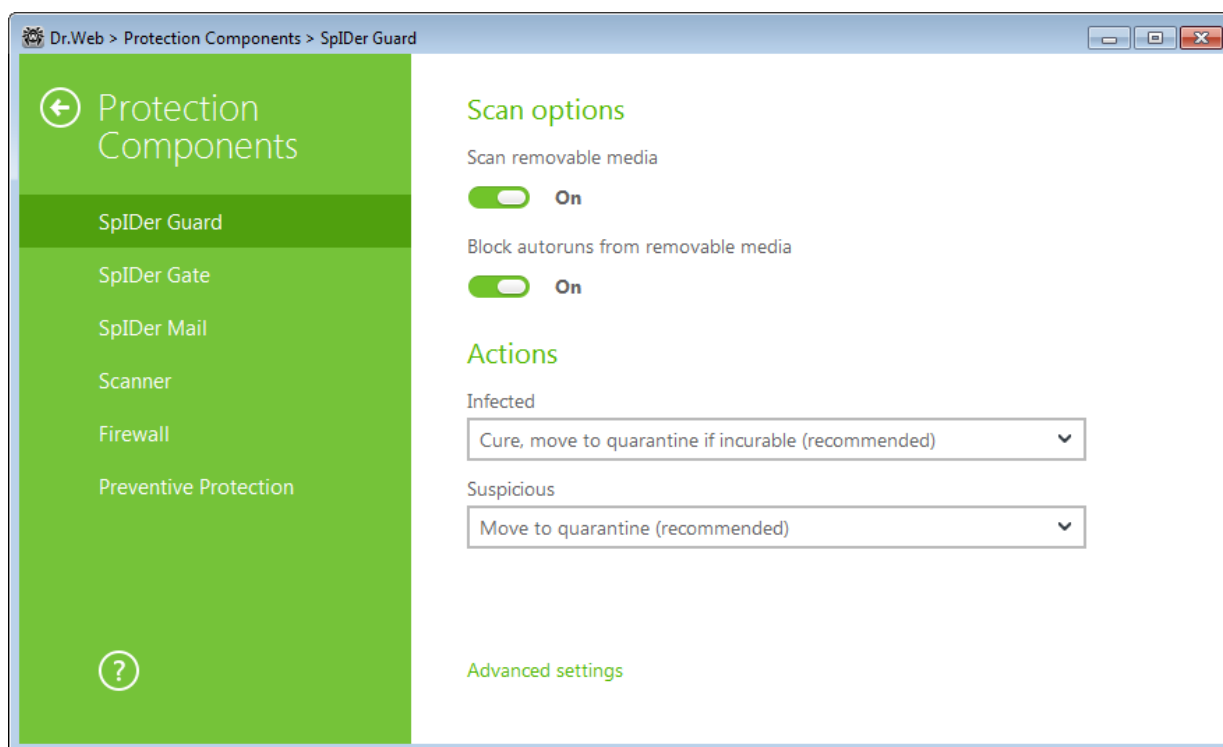

Scan options

Heuristic analysis

By default, **SpIDer Guard** performs scan using [heuristic analysis](#). If this option is disabled, **SpIDer Guard** will use signature analysis only.

Background rootkit scanning

Anti-rootkit component included in **Dr.Web** provides options for background scanning of the operating system for complex threats and curing of detected active infections when necessary.

If this option is enabled, **Dr.Web Anti-rootkit** constantly resides in memory. In contrast to the “on-the-fly” scanning of files by **SpIDer Guard**, scanning for rootkits includes checking of autorun objects, running processes and modules, Random Access Memory (RAM), MBR/VBR disks, computer BIOS system, and other system objects.

One of the key features of **Dr.Web Anti-rootkit** is delicate attitude towards consumption of system resources (processor time, free RAM, and others) as well as consideration of hardware capacity.

When **Dr.Web Anti-rootkit** detects a threat, it notifies you on the detection and neutralizes the malicious activity.



During background rootkit scanning, files and folders specified on the [Excluded files](#) page are excluded from scanning.

To enable background scanning, enable the **Scan computer for rootkits (recommended)** option.



Disabling of **SpIDer Guard** does not affect background scanning. If the option is enabled, background scanning is performed regardless of whether **SpIDer Guard** is running or not.



Actions

On this page, you can configure reactions of **SpIDer Guard** to detection of infected or suspicious files and malware.

For different types of compromised objects, actions are assigned separately from the respective drop-down lists:

- **Objects infected** with a known and (supposedly) curable virus
- **Supposedly infected** (suspicious) objects
- Objects that pose potential threat (riskware)

Reaction of **SpIDer Guard** to detection of various malicious software is also set separately. Set of actions available for the selection depends on the type of the virus event.

By default, **SpIDer Guard** attempts to cure infected and supposedly curable files, moves other most dangerous objects to [Quarantine](#), and *ignores* minor threats such as jokes, hacktools, and riskware. The reactions of **SpIDer Guard** are similar to those of **Dr.Web Scanner**.

You can select one of the following actions for detected threats:

Action	Description
Cure, move to quarantine if not cured	Instructs to restore the original state of the object before infection. If the object is incurable, or the attempt of curing fails, this object is moved to quarantine. The action is available only for objects infected with a known virus that can be cured except for Trojan programs and files within complex objects.
Cure, delete if not cured	Instructs to restore the original state of the object before infection. If the object is incurable, or the attempt of curing fails, this object is deleted. The action is available only for objects infected with a known virus that can be cured except for Trojan programs and files within complex objects.
Delete	Instructs to delete the object. This action is not available for boot sectors. No action is performed on malicious objects for which you selected this action if they are detected in a boot sector.
Move to Quarantine	Instructs to move the object to a specific folder of Quarantine . No action is performed on malicious objects for which you selected this action, if they are detected in a boot sector.
Ignore	Instructs to skip the object without performing any action or displaying a notification. The action is available only for potentially dangerous files (adware, dialers, jokes, hacktools, and riskware).



SpIDer Guard does not check complex objects. No action is performed on such objects or on files within them.

Copies of all processed objects are stored in [Quarantine](#).



Scan mode

In this group, you can set up what actions with objects require scanning “on-the-fly” with **SpIDer Guard**.

Option	Description
Optimal (recommended)	<p>This scan mode is used by default.</p> <p>In this mode, SpIDer Guard scans objects only when one of the following actions is traced:</p> <ul style="list-style-type: none">• For objects on hard drives, an attempt to execute a file, create a new file, or add a record to an existing file or boot sector.• For objects on removable devices, an attempt to access file or boot sectors in any way (write, read, execute).
Paranoid	<p>In this mode, SpIDer Guard scans files and boot sectors on hard or network drives and portable data storages at any attempt to access them (create, write, read, execute).</p>



When running in the Optimal mode, **SpIDer Guard** does not terminate execution of an [EICAR test file](#) and the file is not processed as malicious since it does not pose any actual threat to your system. However, if you copy or create such a file in your system, it will be detected by **SpIDer Guard** and moved to **Quarantine** by default.

The **Optimal** mode is recommended for use after a thorough [scan](#) of all hard drives by **Dr.Web Scanner** has been performed. With this mode activated, **SpIDer Guard** prevents penetration of new viruses and other malicious objects via removable devices into your computer while preserving performance by omitting knowingly “clean” objects from repeated scans.

The **Paranoid** mode ensures maximum protection, but considerably reduces computer performance.

In any mode, objects on removable media and network drives are scanned only if the corresponding options in the **Additional tasks** group are enabled.



Operating system may register some removable devices as hard drives (for example, portable USB hard drives). Scan such devices with **Dr.Web Scanner** when you connect them to the computer.

By default, files within archives and mailboxes are not scanned. This does not affect security of your computer when it is constantly protected by **SpIDer Guard**, only delays the moment of detection. If a file within an archive or email attachment is infected, the malicious object will be detected and neutralized by **SpIDer Guard** immediately when you try to extract the archived files or download the attachment.

Advanced settings

The settings of this group allow to specify parameters for scanning objects “on-the-fly” and are always applied regardless of the selected **SpIDer Guard** operation mode.

In this group, you can configure **SpIDer Guard** parameters to scan the following objects:

- Executables of running processes regardless of their location (this option is enabled by default)
- Installation packages
- Files on network drives
- Files and boot sectors on removable media (this option is enabled by default)

By default, **SpIDer Guard** blocks autoruns from removable media such as CD/DVD, flash memory, and



so on. This option helps to protect your computer from viruses transmitted via removable media.



If any problem occurs during installation with the autorun option, it is recommended to temporary disable the **Block autoruns from removable media** option.



13.2. SpIDer Gate

SpIDer Gate is an anti-virus HTTP monitor. By default, SpIDer Gate automatically checks incoming HTTP traffic and blocks all malicious objects. HTTP is used by Web browsers, download managers, and other applications which exchange data with web servers, that is, which work with the Internet.

By default, **SpIDer Gate** blocks all incoming malicious objects.

You can configure **SpIDer Gate** to completely disable monitoring of incoming or outgoing traffic, compose a list of applications whose HTTP traffic should always be checked or exclude certain applications from being monitored.

By default, **SpIDer Gate** blocks all incoming malicious objects. URL filtering of malicious and unreliable websites is also enabled by default.

You can also [connect](#) to **Doctor Web** cloud services that allow anti-virus components to use the latest information on threats. This information is stored and updated on **Doctor Web** servers in real-time mode.


SpIDer Gate resides in the main memory of the computer and automatically launches upon Windows startup.

13.2.1. Configuring SpIDer Gate



To access **SpIDer Gate** settings, you are prompted to enter the password if you enabled the **Protect Dr.Web settings with a password** option in the [Settings](#) window.

The default settings are optimal for most cases. Do not change them unnecessarily.

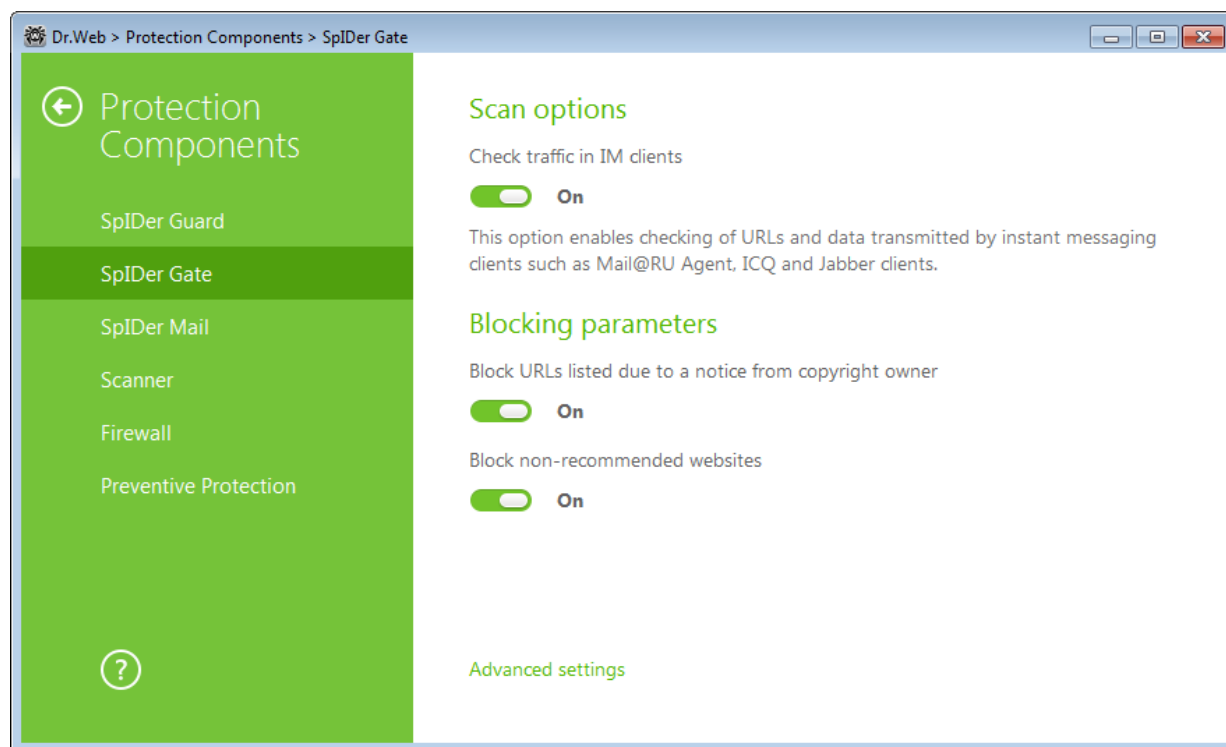



Check traffic in IM clients

In the **Scan options** group, you can enable checking of URLs and data transmitted by instant messaging clients (Mail@RU Agent, ICQ, and Jabber clients). Only incoming traffic is checked. By default, this option is enabled.

Links transmitted in messages are checked according to **SpIDer Gate** settings: links to the websites known as infection sources are blocked automatically; links to the websites that are not recommended for visiting or to URLs specified on a notice from copyright owners are blocked only if the corresponding options are enabled on the **Actions** page. At that, the [white list](#) and the [list of excluded applications](#) also have an effect.

Files transmitted via instant messaging clients are also checked. When a threat is detected, file transmission is blocked if the corresponding option is enabled on the **Block programs** page. Viruses are blocked automatically if the **Check traffic in IM clients** option is enabled.

Blocking parameters

In the **Blocking parameters** group you can enable automatic blocking of URLs listed due to a notice from copyright owners (enable the corresponding option) and blocking of unreliable websites (enable the **Block non-recommended websites** option). On the **Exclusions** page you can [specify websites](#) access to which must be allowed regardless of other restrictions.



By default, **SpIDer Gate** blocks access to websites known as infection sources. At that, applications from the [exclusion list](#) are not blocked.

Programs to block

By default, **SpIDer Gate** detects and blocks the following malicious programs:

- Suspicious
- Riskware
- Dialers
- Hacktools
- Adware
- Jokes

By default, **SpIDer Gate** blocks suspicious programs, adware and dialers.

Objects to block

SpIDer Gate can block malformed or not checked objects. This option is disabled by default.

Advanced settings

You can configure scans of archive and installation packages. By default, all malicious programs are blocked and scanning of archives and installation packages is disabled.

You can also adjust **Scan priority** that determines distribution of resources depending on traffic scanning priority. Internet connection speed decreases when **SpIDer Gate** operates with lower priority, since the monitor have to wait longer for downloading and scans larger portions of data. When you



increase the priority, SpIDer Gate starts scanning data more often, thus increasing speed of your Internet connection. However, frequent scans also increase processor load.

You can select the type of HTTP traffic to check. By default, only incoming traffic is scanned. At that, the specified actions, the [white list](#), and the [list of excluded applications](#) also have an effect.



13.3. SpIDer Mail

SpIDer Mail is an anti-virus mail scanner that installs by default and monitors data exchange between mail clients and mail servers made via POP3, SMTP, IMAP4, or NNTP (IMAP4 stands for IMAPv4rev1) protocols.

The default **SpIDer Mail** settings are optimal for beginners, provide maximum protection and require minimum user interference. However, by default **SpIDer Mail** may block some options of mail programs (for example, sending a message to multiple addresses might be considered as mass distribution, incoming mail is not scanned for spam), useful information from safe text part of infected messages becomes unavailable in case of automatic deletion. Advanced users can configure mail scanning settings and reaction of SpIDer Mail to various virus events.

Mail processing

Any incoming messages are intercepted by **SpIDer Mail** before they are received by mail clients. Messages are scanned for viruses with the maximum possible level of detail. If no viruses or suspicious objects are found, messages are passed on to the mail program in a “transparent” mode as if they were received directly from the server. Similar procedure is applied to outgoing messages before they are sent to servers.

By default, **SpIDer Mail** reacts to detection of infected incoming messages as well as messages that were not scanned (for example, due to complicated structure) as follows (for details on how to modify the reaction, refer to [Configuring SpIDer Mail](#)):

- Malicious code is removed from infected messages, then messages are delivered as usual. This action is called *curing* the message.
- Messages with suspicious objects are moved to [Quarantine](#) as separate files; the mail client receives a notification about this. This action is called *moving* the message. All moved messages are deleted from the POP3 or IMAP4 mail servers.
- Messages that have not been scanned and safe messages are *passed on* to the mail client.

Infected or suspicious outgoing messages are not sent to the server, a user is notified that the message will not be sent (usually the mail program will save such a message).

Dr.Web Scanner can also detect viruses in mailboxes of several formats, but **SpIDer Mail** has several advantages:

- Not all formats of popular mailboxes are supported by **Scanner**. When using SpIDer Mail, the infected messages are even not delivered to mailboxes.
- **Scanner** does not check the mailboxes at the moment of the mail receipt but either on user demand or according to schedule. Furthermore, this action is resource consuming and takes a lot of time.

Thus, when all anti-virus components operate with their default settings, **SpIDer Mail** detects viruses and suspicious objects distributed via email first and prevents them from infiltrating your computer. **SpIDer Mail** operation is rather resource sparing. Scanning of email files can be performed without other components.


13.3.1. Configuring SpIDer Mail



To access **SpIDer Mail** settings, you are prompted to enter the password if you enabled the **Protect Dr.Web settings with a password** option in the [Settings](#) window.



The default settings are optimal for most cases. Do not change them unnecessarily.

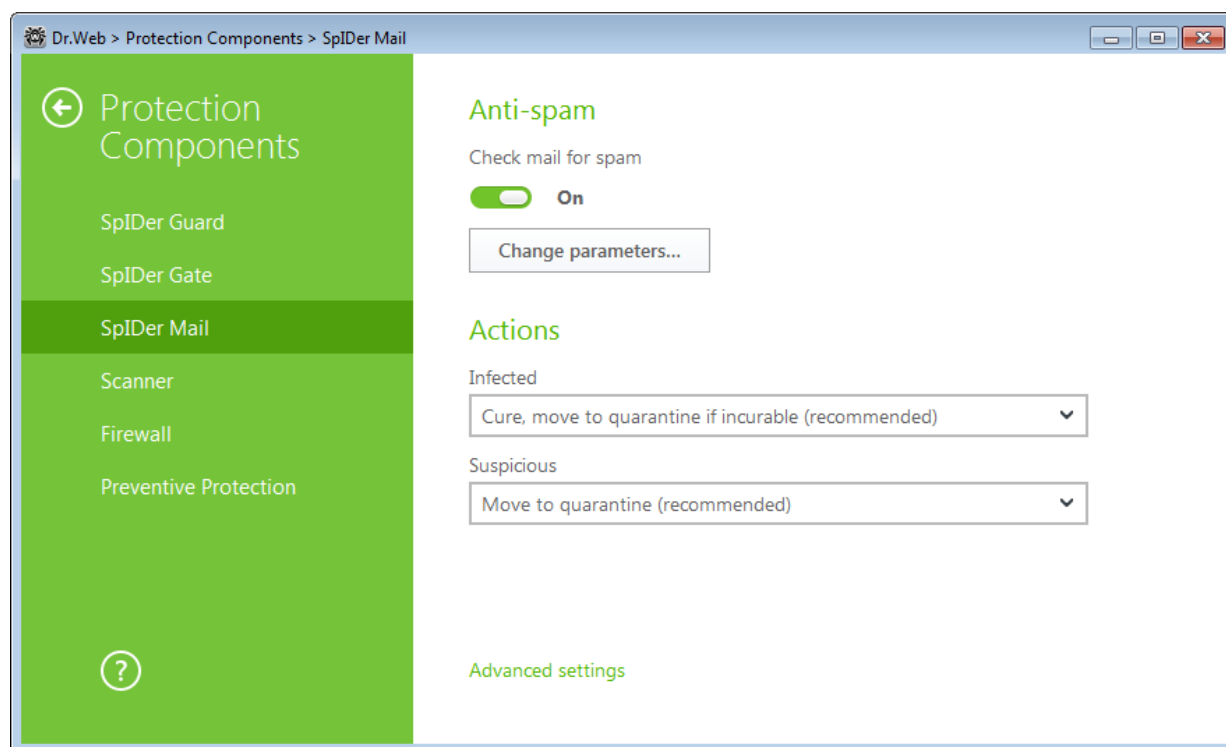

Anti-spam

By default, **SpIDer Mail** checks emails for spam. You can disable this option using the corresponding switch or change scanning parameters by clicking **Change parameters**. Anti-spam technologies and adjustable parameters are described in the [Anti-spam](#) section.

Actions

By default, **SpIDer Mail** attempts to cure messages infected with a known and (supposedly) curable virus and moves incurable and suspicious messages as well as adware and dialers to [Quarantine](#) at the same time ignoring all other minor threats. Other messages are transmitted unchanged by **SpIDer Mail** (*skipped*).

The **SpIDer Mail** reactions are similar to those of **Dr.Web Scanner**.

You can select one of the following actions to be applied by **SpIDer Mail** to detected threats:

Action	Description
Cure, move to quarantine if not cured	Instructs to restore the original state of the message before infection. If the message is incurable, or the attempt of curing fails, the object is moved to quarantine. Available only for objects infected with a known virus that can be cured except for Trojan programs, which are deleted on detection. This action is not applicable to files within archives.
Cure, delete if not cured	Instructs to restore the original state of the message before infection. If the message is incurable, or the attempt of curing fails, the object is deleted.
Delete	Instructs to delete the message. The message is not sent to recipient; the mail client receives a notification about this.



Action	Description
Move to Quarantine	Instructs to move the message to the special Quarantine folder. The message is not sent to the recipient; the mail client receives a notification about this.
Ignore	Instructs to pass the message to the mail client as usual, that is, without performing any action.

If an email contains a malicious object, any reaction except **Ignore** results in failure to send the message to a mail server or recipient.

To increase security above the default level, you may select the **Move to quarantine** action for **Unchecked messages**, and then scan the moved file with **Dr.Web Scanner**.



If you want to disable scans of email by **SpIDer Mail**, ensure that **SpIDer Guard** monitors your computer constantly.

After performing reaction you configured, **SpIDer Mail** can display a notification in the notification area. If necessary, you can [configure](#) desktop and email notifications.

Actions on messages

In this group, you can configure additional actions to be applied when **SpIDer Mail** processes messages.

Option	Description
Insert 'X-AntiVirus' header into messages	This option is enabled by default. Instructs SpIDer Mail to add scan results and information on Dr.Web version to message headers after processing. You cannot edit data format.
Delete modified messages on server	Instructs to remove messages to which either Delete or Move to Quarantine action was applied by SpIDer Mail . The messages are removed from mail servers regardless of the mail client settings.

Scanning optimization options

You can set the condition under which SpIDer Mail should acknowledge complex messages, whose scanning is time consuming, as unchecked. To do that, enable the **Message scan timeout** option and set the maximum message scanning time. After the expiry of the specified period (by default, 250 sec.), **SpIDer Mail** stops check of the message.

Scanning archives

Enable the **Scan archives** option if you want **SpIDer Mail** to scan archived files transferred via email. You can configure the following parameters:

- **Maximum file size to extract.** If an archive size exceeds the specified value (by default, 30,720 KB), **SpIDer Mail** does not unpack and check the archive.
- **Maximum compression ratio.** If an archive compression ratio exceeds the specified value (by default, 0), **SpIDer Mail** does not unpack and check the archive.
- **Maximum archive nesting level.** If a nesting level is greater than the specified value (by default, 64), **SpIDer Mail** proceeds unpacking and scanning the archive until this limit is exceeded.

You can enable one or more options.



There is no restrictions for a parameter if the value is set to 0.

Advanced settings

The following settings allow you to configure additional mail scanning parameters:

- Use heuristic analysis—in this mode, [special methods](#) are used to detect suspicious objects that are most likely infected with unknown viruses. To disable the analyzer, disable the **Use heuristic analysis (recommended)** option.
- Scan installation packages. This option is disabled by default.

13.3.2. Anti-spam

Dr.Web Anti-spam technologies consist of several thousand rules that can be divided into several groups:

- **Heuristic analysis**—A highly intelligent technology that empirically analyzes all parts of a message: header, message body, and attachments, if any.
- **Detection of evasion techniques**—This advanced anti-spam technology allows detecting evasion techniques adopted by spammers to bypass anti-spam filters.
- **HTML signature analysis**—Messages containing HTML code are compared with a list of known patterns from the anti-spam library. Such comparison, in combination with the data on sizes of images typically used by spammers, helps to protect users against spam messages with HTML code linked to online content.
- **Semantic analysis**—The words and phrases of a message—both visible to the human eye and hidden—are compared with words and phrases typical of spam using a special dictionary.
- **Anti-scamming**—Scam and phishing messages include so-called “Nigerian” scams, loan scams, lottery and casino scams and false messages from banks and credit organizations. A special module is used to filter scams.
- **Technical spam**—Bounces are delivery-failure messages sent by a mail server. Such messages are also sent by a mail worm. Therefore, bounces are as unwanted as spam.

You can configure the following **Anti-spam** options:

Option	Description
Allow Cyrillic text	This option is enabled by default. Select this check box to prevent SpIDer Mail from marking Cyrillic emails as spam without prior analysis. Otherwise, such emails are most likely to be marked as spam.
Allow Asian text	This option is enabled by default. Select this check box to prevent SpIDer Mail from marking Asian emails as spam without prior analysis. Otherwise, such emails are most likely to be marked as spam.
Add the prefix to subjects of spam messages	By default, this option is enabled, and SpIDer Mail adds the [SPAM] prefix to the Subject field of all spam messages. Instructs SpIDer Mail to add a special prefix to subjects of spam messages. Using a prefix allows you to create filter rules for spam in those mail clients (for example, Microsoft Outlook Express) where it is not possible to enable filtering by headers.



Processing mail by spam filter

SpIDer Mail adds the following header to the processed messages:

- X-DrWeb-SpamState: <value>, where <value> indicates whether the message is considered by **SpIDer Mail** as spam (Yes) or not (No).
- X-DrWeb-SpamVersion: <version>, where <version> indicates **Dr.Web Anti-spam** version.
- X-DrWeb-SpamReason: <spam rate>, where <spam rate> includes list of evaluations on various spam criteria.

You can use these headers and the prefix in the Subject field, if selected, to configure email filtering for your mail client.



If you use IMAP/NNTP protocols, configure your mail client to download complete messages from mail server at once, i.e. without previewing their headers. This is required for correct operation of the spam filter.

To improve performance of the spam filter, you can report errors in spam detection.

To report spam detection errors

1. Create a new email and attach the message that was processed incorrectly by the spam filter. Messages included within the email body are not analyzed.
2. Send the message with the attachment to one of the following addresses:
 - If the attached message is detected as spam incorrectly, send the email to vrnonspam@drweb.com.
 - If the attached messages is an undetected spam, send it to vrspam@drweb.com.




13.4. Scanner



To access the **Scanner** settings, you are prompted to enter the password if you enabled the **Protect Dr.Web settings with a password** option in the [Settings](#) window.

The default settings are optimal for most cases. Do not change them unnecessarily.

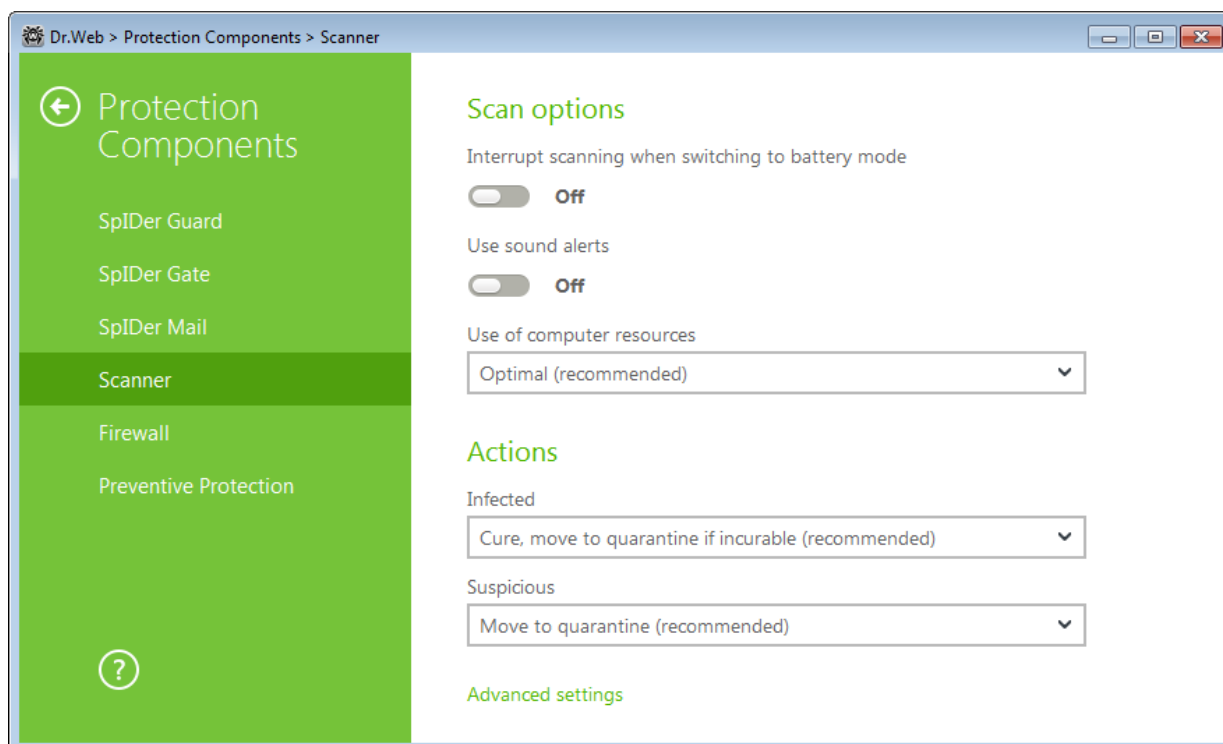

Scan options

In this group, you can configure general parameters of **Dr.Web Scanner** operation.

- **Interrupt scanning when switching to battery mode.** Enable this option to interrupt scanning when switching to battery mode. Option is disabled by default.
- **Use sound alerts.** Enable this option for **Dr.Web Scanner** to use sound alerts for every event. Option is disabled by default.
- **Limits on use of computer resources.** This option limits the use of computer resources by **Dr.Web Scanner**. The default value is optimal for most cases.

Actions

On this page, you can configure reaction of **Scanner** on detection of infected or suspicious files and archives or other malicious objects.

For different types of compromised objects, actions are assigned separately from the respective drop-down lists:

- **Objects infected** with a known and (supposedly) curable virus



- **Supposedly infected** (suspicious) objects
- Objects that pose potential threat (riskware)

Reaction of **Scanner** to detection of various malicious software is also set separately. Set of actions available for the selection depends on the threat type.

By default, **Scanner** attempts to cure the infected and supposedly curable files, moves other most dangerous objects to [Quarantine](#).

You can select one of the following actions for detected threats:



Threats within complex objects cannot be processed individually. For such threats, **Dr.Web Scanner** applies an action selected for this type of a complex object.

Advanced settings

You can disable check of installation packages, archives, and email files. This option is enabled by default.

You can also select one of the following actions for **Scanner** to perform once scanning is complete:

1. **Do not apply action.** **Scanner** will display the list of detected threats.
2. **Neutralize detected threats.** **Scanner** will neutralize threats automatically.
3. **Neutralize detected threats and shut down computer.** **Scanner** will shut down the computer once threats are automatically neutralized.



13.5. Dr.Web Firewall

Dr.Web Firewall protects your computer from unauthorized access and prevents leak of vital data through networks. It monitors connection attempts and data transfer and helps you block unwanted or suspicious connections both on network and application levels.

Firewall provides you with the following features:

- Control and filtration of all incoming and outgoing traffic
- Access control on the application level
- Filtration of packets on the network level
- Fast selection of rule sets
- Event logging

13.5.1. Training Firewall

Once installation completes, **Firewall** starts learning by intercepting all connection attempts from your operating system or user applications. If no filtering rules have been set for the program, **Firewall** prompts you to select the necessary action.



When running under limited user account (Guest), **Dr.Web Firewall** does not display notifications on network access attempts. Notifications are shown for the session with administrator privileges if such session is simultaneously active.

Application Rules

1. To make a decision, consider the following information displayed in the notification:

Information	Description
Application	The name of the application. Ensure that the path to the application executable, specified in the Application path entry field, corresponds to the file location.
Application path	The full path to the application executable file and its name.
Digital signature	Digital signature of the application.
Address	The used protocol and network address to which the application is trying to connect.
Port	The network port used for the connection attempt.
Direction	The direction of the connection

2. Once you make a decision, select an appropriate action:
 - To block this connection once, select **Block once**
 - To allow this connection once, select **Allow once**
 - To open a window where you can create a new application filter rule, select **Create rule**. In the open window, you can either choose one of the predefined rules or [create your rule](#) for the application.
3. Click **OK**. **Firewall** executes the selected action and closes the notification window.



You need administrative privileges to create a rule.



In cases when a connection is initiated by a trusted application (an application with existing rules), but this application is run by an unknown parent process, **Firewall** displays the corresponding notification.

To set parent process rules

1. Consider information about the parent process in the notification displayed on a connection attempt.
2. Once you make a decision about what action to perform, select one of the following:
 - To block this connection once, select **Block**
 - To allow this connection, click **Allow**.
 - To create a rule for the parent process, click **Create rule** and in the open window specify [required settings](#).
3. Click **OK**. **Firewall** executes the selected action and closes the notification window.


When an unknown process is run by another unknown process, a notification displays the corresponding details. If you click **Create rule**, a new window appears allowing you to create new rules for this application and its parent process.



13.5.2. Configuring Firewall



To access the **Firewall** settings, you are prompted to enter the password if you enabled the **Protect Dr.Web settings with a password** option in the [Settings](#) window.

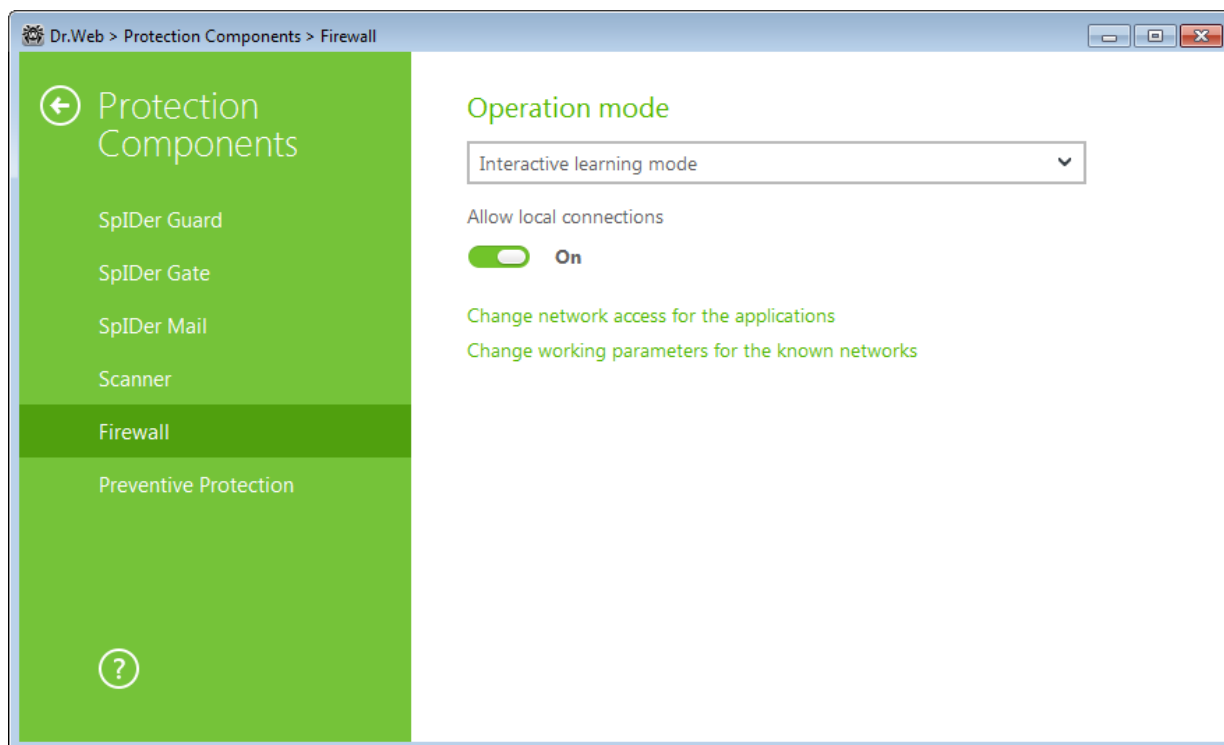

To start using **Firewall**, do the following:

- Select the operation mode.
- [List](#) authorized applications.
- Configure parameters for known networks.

By default, **Firewall** automatically creates rules for known applications. Regardless of the operation mode, events are logged.

The default settings are optimal for most cases. Do not change them unnecessarily.

The **Allow local connections** option allows all applications on your computer to interconnect (i.e., allow unlimited connections between applications installed on your computer). For this type of connection, no rules are applied. Disable this option to apply filtering rules to connections carried out both through the network and within your computer.



After a session under a limited user account (Guest) is open, **Firewall** displays an access error message. **Firewall** status is then displayed as inactive in **SpIDer Agent**. However, **Firewall** is enabled and operates with default settings or settings set earlier in Administrative mode.



To set operation mode

Select one of the following operation modes:

- **Allow unknown connections**—free access mode, when all unknown applications are permitted to access networks.
- **Create rules for known applications automatically**—operation mode, when rules for known applications are created automatically (set by default).
- **Interactive learning mode**—[learning mode](#), when the user is provided with full control over **Firewall** reaction.
- **Block unknown connections**—restricted access mode, when all unknown connections are blocked. For known connections, **Firewall** applies the appropriate rules.

Create rules for known applications automatically

In this mode, rules for known applications are created automatically. For unknown applications, **Firewall** gives you the opportunity to manually allow or block connections or create new rules.

When a user application or the operating system attempts to connect to a network, **Firewall** checks whether filtering rules have been created for the application. If there are no filtering rules, you are prompted to select a temporary solution or create a rule to be applied each time this type of connection is detected.

This mode is used by default.

Interactive learning mode

In this mode, you have total control over **Firewall** reaction to the detection of unknown connections. Thus, the program is trained while you work on your computer.

When a user application or the operating system attempts to connect to a network, **Firewall** checks whether filtering rules have been created for the application. If there are no filtering rules, you are prompted to select a temporary solution or create a rule to be applied each time this type of connection is detected.

Block unknown connections

In this mode, **Firewall** automatically blocks all unknown connections to network resources, including the Internet.

When a user application or the operating system attempts to connect to a network, **Firewall** checks whether filtering rules have been created for the application. If there are no filtering rules, **Firewall** blocks network access for the application without displaying any notification to the user. If filtering rules for the application are set, **Firewall** processes the connection according to the specified actions.

Allow unknown connections

In this mode, Firewall allows all unknown applications for which filtering rules have not been set to access network resources, including the Internet. No notification on access attempt is displayed by



Firewall.

Settings for Applications

Application level filtering helps you to control access of various applications and processes to network resources as well as enable or disable applications to run other processes. You can create rules for both system and user applications.



Firewall allows you to create no more than one set of rules per each application.

This page lists all applications and processes for which you can modify [application filter rule sets](#) by creating new rules, editing existing ones, or deleting those that are no longer needed. Each application is explicitly identified by the path to its executable file. **Firewall** uses the `SYSTEM` name to indicate the rule set applied to the operating system kernel (the system process for which there is no unique executable file).





If the file of an application for which the rule had been created was changed (for example, an update was installed), **Firewall** prompts to confirm that the application is still allowed to access network resources.



If you created a blocking rule for a process or set **Block unknown connections** mode and then disabled the rule or changed the work mode, the process will be blocked till its next attempt to establish connection.

When an application is deleted from your computer, the related rules are not automatically deleted. You can delete them manually by clicking **Remove unused rules** in the shortcut menu of the list.

In the **New application rule set** (or **Edit rule set**) window, you can configure access to network resources as well as enable or disable launch of other applications.

To open this window, in the **Firewall settings** window, select **Change network access for the applications** and click  or select an application and click .

When **Firewall** is operating in [training mode](#), you can start creating a new rule directly from the windows with notification on an unknown connection attempt.



Launching other applications

To enable or disable launch of other applications, from the **Launching network applications** drop-down list select one of the following:

- **Allow**—if you want to enable the application to run other processes.
- **Block**—if you want to disable the application to run other processes.
- **Not specified**—if you want to use the settings specified for the selected [operation mode](#) of **Firewall**.

Access to network resources

1. Specify one of the following modes to access network resources:
 - **Allow all**—all connections are allowed.
 - **Block all**—all connections are blocked.
 - **Not specified**—if you want to use the settings specified for the selected [operation mode](#) of **Firewall**.
 - **User-defined**—enables you to create a set of rules that allow or block different connections.
2. When you select the **User-defined** mode, a table with details on the application rule set displays below.

Parameter	Description
Enabled	Status of the rule.
Action	The action for Dr.Web Firewall to perform when an attempt to connect to the Internet is detected: <ul style="list-style-type: none">• Block packets—block the connection.• Allow packets—allow the connection.
Rule name	The rule name.
Direction	The direction of the connection: <ul style="list-style-type: none">• Inbound—the rule is applied when someone from the network attempts to connect to an application on your computer.• Outbound—the rule is applied when an application on your computer attempts to connect to the network.• Any—the rule is applied regardless of packet transfer direction.
Description	User description of the rule.

3. If necessary, edit the predefined rule set or create a new one:
 - To add a new rule, click **New**. The rule will be added to the end of the list.
 - To modify a rule, select it and click **Edit**.
 - To copy the selected rule to the list, click **Copy**. The copy is added after the selected rule.
 - To remove the selected rule, click **Delete**.
4. If you selected to create a new rule set or edit an existing one, [adjust the settings](#) in the open window.
5. When you finish adjusting the settings, click **OK** to save changes or **Cancel** to cancel them.



Application filtering rules control interaction of a particular application with certain network hosts.

To create a rule

Configure the following parameters:

Parameter	Description
General	
Rule name	The name of the created/edited rule.
Description	The rule description.
Action	The action for Dr.Web Firewall to perform when an attempt to connect to the Internet is detected: <ul style="list-style-type: none">• Block packets—block the connection.• Allow packets—allow the connection.
State	Rule status: <ul style="list-style-type: none">• Enabled—the rule is applied for all matching connections.• Disabled—the rule is temporary not applied.
Direction	The direction of the connection: <ul style="list-style-type: none">• Inbound—the rule is applied when someone from the network attempts to connect to an application on your computer.• Outbound—the rule is applied when an application on your computer attempts to connect to the network.• Any—the rule is applied regardless of packet transfer direction.
Logging	Logging mode: <ul style="list-style-type: none">• Enabled—register events.• Disabled—no information is logged.
Rule Settings	
Protocol	The network and transport level protocols used for the connection attempt. The following protocols of the network level are supported: <ul style="list-style-type: none">• IPv4• IPv6• IP all—any version of the IP protocol The following protocols of the transport level are supported: <ul style="list-style-type: none">• TCP• UDP• TCP & UDP—TCP or UDP protocol• RAW.
Local address/ Remote Address	The IP address of the remote host. You can specify either a certain address (Equals) or several IP addresses using a range (In range), specific subnet mask (Mask) or masks of all subnets in which your computer has a network address (MY_NETWORK). To apply the rule for all remote hosts, select Any .
Local port/ Remote port	The port used for the connection. You can specify either a specific port number (Equals) or a port range (In range). To apply the rule for all ports, select Any .




Settings for Networks

On the **Network** page, you can select a rule set to be used for filtering packets transmitted through a certain network interface installed on your computer.

To set rule sets for network interfaces

1. To create a set of rules for filtering the packets transmitted through a certain interface, select **Change working parameters for the known networks** in the **Firewall** settings window.
2. For the required interface, select the appropriate rule set. If the appropriate rule set does not exist, you can [create](#) a new set of packet filtering rules.
3. Click **OK** to save the changes.

To list all available interfaces, click  and select **Show all**. This opens a window where you can select interfaces that are to be permanently listed in the table. Active interfaces are listed in the table automatically.

To configure rules for interfaces, click **Configure**.

Packet filtering allows you to control access to network regardless of what program initiates the connection. These rules are applied to all network packets transmitted through [a network interface](#) of your computer.

Thus, packet filtering provides you with more general mechanisms to control access to network than the [application level filtering](#).

Firewall uses the following predefined rule sets:

- **Default Rule**—this rule set is used by default for new [network interfaces](#).
- **Allow All**—this rule set configures the component to pass through all packets.
- **Block All** – this rule set configures the component to block all packets.

For fast switching between filtering modes, you can create custom sets of filtering rules.

To set rule sets for network interfaces

In the **Firewall** settings window, select **Interfaces** and click **Configure**. On this page you can:

- [Configure](#) sets of filtering rules by adding new rules, modifying existing ones or deleting them.
- [Configure](#) additional filtering settings.

To configure rule sets

Do one of the following:

- To add a new set of rules, click **New**.
- To edit an existing set of rules, select the rule set in the list and click **Edit**.
- To add a copy of an existing set of rules, select the rule set and click **Copy**. The copy is added after the selected rule set.
- To delete a selected rule set, click **Delete**.



To configure additional settings

In the **Packet filter settings** window, use the following options:

Option	Description
Use TCP stateful packet filtering	Select this check box to filter packets according to the state of existing TCP connections. Firewall will block packets that do not match the TCP protocol specification. This option helps to protect your computer from DoS attacks (denial of service), resource scanning, data injection, and other malicious operations. It is also recommended to enable stateful packet filtering when using complex data transfer protocols (FTP, SIP, etc.). Clear this check box to filter packets without regard to the TCP session state.
Management of fragmented IP packets	Select this check box to ensure correct processing of large amounts of data. The maximum transmission unit (MTU) may vary for different networks, therefore large IP packets may be fragmented. When this option is enabled, the rule selected for the first fragment of a large IP packet is applied to all other fragments. Clear this check box to process fragmented packets independently.

Rule Sets

The **Edit rule set** window lists packet filtering rules for the selected rule set. You can configure the list by adding new rules or modifying existing rules and the order of their execution. The rules are applied according to their order in the set.

For each rule in the set, the following information is displayed:

Parameter	Description
Enabled	Status of the rule.
Action	The action for Firewall to perform when a packet is intercepted: <ul style="list-style-type: none">• Block packets• Allow packets
Rule name	The rule name.
Direction	The direction of the connection: <ul style="list-style-type: none">• the rule is applied when the packet is received from the network.• – the rule is applied when a packet is sent into the network from your computer.• – the rule is applied regardless of packet transfer direction.
Logging	The logging mode for the rule. This parameter defines which information should be stored in the log: <ul style="list-style-type: none">• Headers only—log the packet header only.• Entire packet—log the whole packet.• Disabled—no information is logged.
Description	The rule description.

Edit rule set

1. If you selected to create or edit an existing rule set on the **Packet filtering settings** page, in the open window specify the name for the rule set.
2. Use the following options to create filtering rules:
 - To add a new rule, click **New**. The new rule is added to the beginning of the list.
 - To modify a rule, select it and click **Edit**.



- To copy the selected rule to the list, click **Copy**. The copy is added after the selected rule.
 - To remove the selected rule, click **Delete**.
3. If you selected to create or edit a rule, [configure the rule settings](#) in the open window.
 4. Use the arrows next to the list to change the order of rules. The rules are applied according to their order in the set.
 5. When you finish adjusting the settings, click **OK** to save changes or **Cancel** to cancel them.



Packets with no rules in a rule set are blocked automatically except packets allowed by [Application Filter](#) rules.

Packet Filter Rule Sets

To add or edit a rule

1. In the packet filter rule set creation or modification window, click **Create** or **Edit**. This opens a rule creation or rule modification window.
2. Configure the following parameters:

Parameter	Description
Rule name	The name of the created/edited rule.
Description	The rule description.
Action	The action for Firewall to perform when a packet is intercepted: <ul style="list-style-type: none">• Block packets• Allow packets
Direction	The direction of the connection: <ul style="list-style-type: none">• Inbound—the rule is applied when a packet is received from the network.• Outbound—the rule is applied when a packet is sent into the network from your computer.• Any—the rule is applied regardless of packet transfer direction.
Logging mode	The logging mode for the rule. This parameter defines which information should be stored in the log: <ul style="list-style-type: none">• Entire packet—log the whole packet.• Headers only—log the packet header only.• Disabled—no information is logged.
Criterion	Filtering criterion. For example, transport or network protocol. To add a filtering criterion, select it from the list and click Add . You can add any number of filtering criteria. For certain headers, there are additional criteria available.



If you do not add any criterion, the rule will allow or block all packets depending on the setting specified in the **Action** field.

If you select **Any** for the **Local IP address** and **Remote IP address** fields, the rule is applied for any packet which contains an IPv4 header and was sent from a physical address of the local computer.



13.6. Dr.Web for Microsoft Outlook

Main functions

Dr.Web for Microsoft Outlook plug-in performs the following functions:

- Anti-virus check of incoming email attachments
- Check of email attachments transferred over encrypted SSL connections
- Spam check
- Detection and neutralization of malware
- Heuristic analysis for additional protection against unknown viruses

13.6.1. Configuring Dr.Web for Microsoft Outlook

You can set up parameters of plug-in operation and view statistics on Microsoft Outlook mail application, in the **Tools** → **Options** → **Dr.Web Anti-virus** page (for Microsoft Outlook 2010, in the **Files** → **Options** → **Add-ins** section select **Dr.Web for Microsoft Outlook** and click the **Add-in Options** button).



The **Dr.Web Anti-virus** page of Microsoft Outlook settings is active only if the user has permissions to change these settings.

On the **Dr.Web Anti-virus** page, the current protection status is displayed (enabled/disabled). This page also provides access to the following program functions:

- [Log](#)—allows to configure the program logging.
- [Check attachments](#) – allows to configure email check and to specify program actions on detection of malicious objects.
- [Spam filter](#) – allows specifying program actions on spam detection and creating black and white lists of email addresses.
- [Statistics](#)—allows to view the number of checked and processed objects.

13.6.2. Threat Detection

[Infected objects](#) are processed according to the [actions](#) defined by the user: the program can cure such objects, remove them or move these objects to [Quarantine](#) to isolate them from the rest of the system.

Malicious Objects

Dr.Web for Outlook detects the following malicious objects:

- Infected objects
- Bomb viruses in files or archives
- Adware
- Hacktools
- Dialers



- Jokes
- Riskware
- Spyware
- Trojans
- Computer worms and viruses

Actions

Dr.Web for Microsoft Outlook allows to specify program reaction to detection of infected or suspicious files and malicious objects in email attachments.

To configure virus check of email attachments and to specify program actions for detected malicious objects, in the Microsoft Outlook mail application, in the **Tools** → **Options** → **Dr.Web Anti-virus** page (for Microsoft Outlook 2010, in the **Files** → **Options** → **Add-ins** section select **Dr.Web for Microsoft Outlook**, then click the **Add-in Options** button), and click **Check attachments**.



The **Check attachments** window is available only for users with administrative privileges.

For Windows Vista and later operating systems, after clicking **Check attachments**:

- If UAC is enabled: administrator is requested to confirm program actions; user without administrative privileges is requested to enter system administrator credentials.
- If UAC is disabled: administrator can change program settings; user does not have the permission to change program settings.

In the **Check attachments** window, specify actions for different types of checked objects and also for the check failure. You can also enable/disable check of archives.

To set actions to be applied on threat detection, use the following options:

- The **Infected** drop-down list sets the reaction to the detection of a file infected with a known and (presumably) curable virus.
- The **Not cured** drop-down list sets the reaction to the detection of a file infected with a known incurable virus (and in case an attempt to cure a file failed).
- The **Suspicious** drop-down list sets the reaction to the detection of a file presumably infected with a virus (upon reaction of the heuristic analyzer).
- In the **Malware** section, set a reaction to detection of unsolicited software of the following types:
 - Adware
 - Dialers
 - Jokes
 - Hacktools
 - Riskware
- The **If check failed** drop-down list allows to configure actions if the attachment cannot be checked, that is, if the attached file is corrupted or password protected.
- The **Check archives (recommended)** check box allows to enable or disable check of attached archived files. Select this check box to enable checking; clear this check box to disable the option.

For different types of objects, actions are specified separately.

The following actions for detected virus threats are available:

- **Cure** (only for infected objects)—instructs to try to restore the original state of an object before infection.



- **As incurable** (only for infected objects)—instructs to apply the action specified for incurable objects.
- **Delete**—delete the object.
- **Move to quarantine**—move the object to the special [Quarantine](#) folder.
- **Skip**—skip the object without performing any action or displaying a notification.



13.6.3. Spam Check

Dr.Web for Microsoft Outlook checks emails for spam by means of **Dr.Web Anti-spam** and filters messages according to the user-defined [settings](#).

To configure spam check, go to the **Tools** → **Options** → **Dr.Web Anti-virus** page (for Microsoft Outlook 2010, in the **Files** → **Options** → **Add-ins** section select **Dr.Web for Microsoft Outlook** and click the **Add-in Options** button) and click **Spam filter**. The [Spam filter](#) window opens.



The **Spam filter** window is available only for users with administrative privileges.

For Windows Vista and later operating systems, after clicking **Spam filter**:

- If UAC is enabled: administrator is requested to confirm program actions; user without administrative privileges is requested to enter system administrator credentials.
- If UAC is disabled: administrator can change program settings; user does not have the permission to change program settings.

Spam Filter Settings

Spam Filter Settings

To configure spam filtering settings, do any of the following actions:

- To run spam checks, select the **Check for spam** check box.
- You can enable addition of special text to the spam message header by selecting the **Add prefix to message header** check box. Text of the added prefix is specified to the right of the check box. The default prefix is *****SPAM*****.
- The checked messages can be marked as read in the message options. To mark messages as read on spam check, select the **Mark message as read** check box.
- You can also configure [black and white lists](#) for message filtering.



If spam filter defines certain messages incorrectly, you are advised to forward such messages to your special email addresses for analysis and improvement of filtering methods.

- Messages that are wrongly regarded as spam should be forwarded to vrnonspam@drweb.com.
- Unblocked spam messages should be forwarded to vrspam@drweb.com.

Forward messages as attachments, that is, do not include them in the message body.

Black and White Lists

Black and white lists are used for message filtration.

To review and to edit the black and white lists, in the [spam filter window](#) click **Black list** or **White list** respectively.

To add addresses

1. Click **Add**.
2. In the **Edit list** window, enter the address (see [white](#) and [black](#) lists filling methods).



3. Click **OK**.

To change addresses

1. Select the address you want to change and click **Edit**.
2. Change the address.
3. Click **OK**.

To delete addresses

1. Select the address you want to delete from the list.
2. Click **Delete**.

In the **Black and White lists** window, click **OK** to save changes.

White list

However, if the domain names in the receiver's and sender's addresses are similar, and this domain name is specified in the white list using the (*) character, this message is checked for spam. Details

- To add a specific sender, enter the full email address (for example, `friend@mail.com`). This ensures delivery of all messages from this sender.
- Each list item can contain only one address or address mask.
- To add a group of sender addresses, enter the mask that determines their names. The mask defines a template for an object definition. It may contain regular characters from email addresses and a special asterisk character (*), which replaces any (including an empty one) sequence of characters.

For example, the following variations are possible:

- `mailbox@domain.com`
- `*box@domain.com`
- `mailbox@dom*`
- `*box@dom*`



The asterisk (*) can be specified at the start or at the end of an address only.

The 'at' sign (@) is mandatory.

- To ensure delivery of messages sent from any email address within a certain domain, use an asterisk (*) instead of the username in the address. For example, if you enter `*@example.net`, messages from all senders within the example.net domain will be delivered without scanning.
- To ensure delivery of messages sent from email address with a certain user name from any domain, use an asterisk (*) instead of the domain name in the address. For example, if you want to receive messages from all senders with the "someone" mailbox, enter `name@*`.

Black list

If the sender's address is on the black list, the message will be automatically regarded as spam. Details

- To add a specific sender, enter the full email address (for example, `spam@spam.com`). All messages, received from these addresses, will be automatically regarded as spam.



- Each list item can contain only one address or address mask.
- To add a group of sender addresses, enter the mask that determines their names. The mask defines a template for an object definition. It may contain regular characters from email addresses and a special asterisk character (*), which replaces any (including an empty one) sequence of characters.
- To regard messages sent from any email address within a domain as spam, use an asterisk character (*) instead of the username in the address. For example, if you enter `*@spam.com`, all messages from addresses within the spam.com domain will be regarded as spam automatically.
- To regard messages sent from an email address with a certain user name from any domain as spam, enter an asterisk character (*) instead of the domain name in the address. For example, if you enter `name@*`, all messages from all senders with the "someone" mailbox name will be regarded as spam automatically.
- Addresses from the recipient domain are not processed. For example, if the recipient mailbox (your mailbox) is in the mail.com domain, then messages from mail.com domain will not be processed with the anti-spam filter.

13.6.4. Event Logging

Dr.Web for Microsoft Outlook registers errors and application events in the following logs:

- [Windows Event Log](#)
- [Debug Text Log](#)

Event Log

The following information is registered in the Windows Event Log:

- Program starts and stops
- Key file parameters: license validation, license expiration date (information is logged on program startup, while the program is running, and when the key file is changed)
- Parameters of program modules: scanner, engine, virus databases (information is logged on program startup and module update)
- License errors: the key file is absent, permission for program module usage is absent in the key file, the license is blocked, the key file is corrupted (information is logged on program startup and while the program is running)
- Information on threat detection
- License expiration notifications (a message is registered in 30, 15, 7, 3, 2, and 1 days before expiration).

To view Windows Event Log

1. Open **Control Panel** of the operating system.
2. Select **Administrative Tools** → **Event Viewer**.
3. In the tree view, select **Application**. The list of events, registered in the log file by user applications, opens. The source of **Dr.Web for Microsoft Outlook** messages is the **Dr.Web for Microsoft Outlook** application.



Debug Text Log

The following information is registered in the debug log:

- License validity status
- Information on threat detection
- Read/write errors or errors occurred while scanning archives or password-protected files
- Parameters of program modules: scanner, engine, virus databases
- Core failures
- License expiration notifications (a message is registered in 30, 15, 7, 3, 2, and 1 days before expiration).

Configure logging

1. On the **Dr.Web Anti-virus** tab, click **Log**. The window with logging settings opens.
2. To set the maximum detalization for the logging, select the **Detailed logging** check box. By default, logging is set to regular mode.



The maximum detalization for the logging decreases server performance; therefore, it is recommended to enable detailed logging only in case an error in operation of **Dr.Web for Microsoft Outlook** occurs.

3. Click **OK** to save changes.



The **Log** window is available only for users with administrative privileges.

For Windows Vista and later operating systems, after clicking **Log**:

- If UAC is enabled: administrator is requested to confirm program actions; user without administrative privileges is requested to enter system administrator credentials.
- If UAC is disabled: administrator can change program settings; user does not have the permission to change program settings.

To view program log

To open the text log, click **Show in folder**. The folder with the log opens.

13.6.5. Statistics

In the Microsoft Outlook mail application, in the **Tools** → **Options** → **Dr.Web Anti-virus** page (for Microsoft Outlook 2010, on the **Files** → **Options** → **Add-ins** section select **Dr.Web for Microsoft Outlook** and click the **Add-in Options** button), statistic information about total number of objects, which have been checked and processed by the program, is listed.

These scanned objects are classified as follows:

- **Checked**—total number of checked messages.
- **Infected**—number of messages with viruses.
- **Suspicious**—number of messages presumably infected with a virus (upon a reaction of the heuristic analyzer).
- **Cured**—number of objects successfully cured by the program.
- **Not checked**—number of objects which cannot be checked or check of which failed due to an error.
- **Clear**—number of messages which are not infected.



Then the number of processed objects is specified:

- **Moved to quarantine**—number of objects moved to [Quarantine](#).
- **Deleted**—number of objects removed from the system.
- **Skipped**—number of objects skipped without changes.
- **Spam messages**—number of objects detected as spam.

By default, statistics is saved to the drwebforoutlook.stat file located in the %USERPROFILE%\Doctor Web folder.




The drwebforoutlook.stat statistics file is individual for each system user.



13.7. Preventive Protection


On this page, you can configure **Dr.Web** reaction to such actions of other programs that can compromise security of your computer and select protection level against exploits.

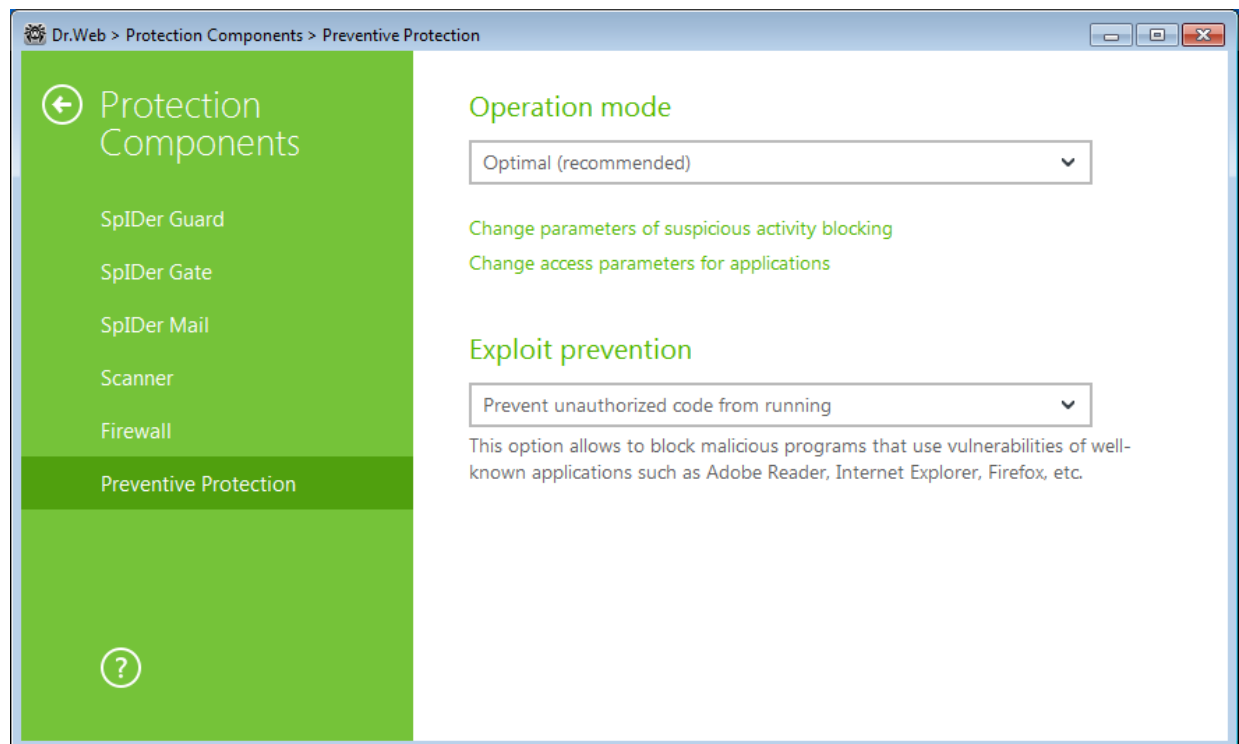

At that, you can configure a separate protection mode for particular applications or configure a general mode whose settings will apply to all other processes.


To configure the general mode, select it from the **Operation mode** list or click **Change parameters of suspicious activity blocking**. As a result of the second action, a window opens providing you with details on each mode and editing options. All changes are saved in the **User** mode. In this window, you can also create a new profile for saving necessary settings.

To create a new profile

1. Click .
2. In the open window, enter a name for the new profile.
3. Look through default settings and, if necessary, edit them.

To configure preventive protection settings for particular applications, click **Change access parameters for applications**. In the open window, you can add a new rule or edit or delete an existing rule.

To add a rule

1. Click .
2. In the open window, click **Browse** and specify the path to the application executable file.
3. Look through default settings and, if necessary, edit them.

To edit an existing rule, select it from the list and click .

To delete an existing rule, select it from the list and click .



For more information about settings of each operation mode, refer to the Preventive Protection Level section.

Preventive protection level

In the default **Optimal** mode, **Dr.Web** disables automatic changes of system objects, whose modification explicitly signifies a malicious attempt to harm the operating system. It also blocks low-level access to disk and protects the HOSTS file from modification.

If there is a high risk of your computer getting infected, you can increase protection by selecting the **Medium** mode. In this mode, access to the critical objects, which can be potentially used by malicious software, is blocked.



Using this mode may lead to compatibility problems with legitimate software that uses the protected registry branches.

When required to have total control of access to critical Windows objects, you can select the **Paranoid** mode. In this mode, **Dr.Web** also provides you with interactive control over loading of drivers and automatic running of programs.

With the **User-defined** mode, you can set a custom protection level for various objects.

Protected object	Description
Integrity of running applications	This option allows detection of processes that inject their code into running applications. It indicates that the process may compromise computer security. Processes that are added to the exclusion list of SpIDer Guard are not monitored.
Integrity of user files	This option allows detection of processes that modify user files with the known algorithm, which indicates that the process may compromise computer security. Processes that are added to the exclusion list of SpIDer Guard are not monitored. To protect your data from modification, you can enable creation of protected copies that contain important data.
HOSTS file	The operating system uses the HOSTS file when connecting to the Internet. Changes to this file may indicate virus infection.
Low level disk access	Block applications from writing on disks by sectors while avoiding the file system.
Drivers loading	Block applications from loading new or unknown drivers.
Critical Windows objects	Other options allow protection of the following registry branches from modification (in the system profile as well as in all user profiles). Image File Execution Options: <ul style="list-style-type: none">Software\Microsoft\Windows NT\CurrentVersion\Image File Execution Options User Drivers: <ul style="list-style-type: none">Software\Microsoft\Windows NT\CurrentVersion\Drivers32Software\Microsoft\Windows NT\CurrentVersion\Userinstallable.drivers Winlogon registry keys: <ul style="list-style-type: none">Software\Microsoft\Windows NT\CurrentVersion\Winlogon, Userinit, Shell, UIHost, System, Taskman, GinaDLL Winlogon notifiers: <ul style="list-style-type: none">Software\Microsoft\Windows NT\CurrentVersion\Winlogon\Notify Windows registry startup keys: <ul style="list-style-type: none">Software\Microsoft\Windows NT\CurrentVersion\Windows, AppInit_DLLs, LoadAppInit_DLLs, Load, Run, IconServiceLib



Executable file associations:

- Software\Classes\.exe, .pif, .com, .bat, .cmd, .scr, .lnk (keys)
- Software\Classes\exefile, piffile, comfile, batfile, cmdfile, scrfile, lnkfile (keys)

Software Restriction Policies (SRP):

- Software\Policies\Microsoft\Windows\Safer

Browser Helper Objects for Internet Explorer (BHO):

- Software\Microsoft\Windows\CurrentVersion\Explorer\Browser Helper Objects

Autorun of programs:

- Software\Microsoft\Windows\CurrentVersion\Run
- Software\Microsoft\Windows\CurrentVersion\RunOnce
- Software\Microsoft\Windows\CurrentVersion\RunOnceEx
- Software\Microsoft\Windows\CurrentVersion\RunOnce\Setup
- Software\Microsoft\Windows\CurrentVersion\RunOnceEx\Setup
- Software\Microsoft\Windows\CurrentVersion\RunServices
- Software\Microsoft\Windows\CurrentVersion\RunServicesOnce

Autorun of policies:

- Software\Microsoft\Windows\CurrentVersion\Policies\Explorer\Run

Safe mode configuration:

- SYSTEM\ControlSetXXX\Control\SafeBoot\Minimal
- SYSTEM\ControlSetXXX\Control\SafeBoot\Network

Session Manager parameters:

- System\ControlSetXXX\Control\Session Manager\SubSystems, Windows

System services:

- System\CurrentControlSet\Services



If any problems occur during installation of important Microsoft updates or installation and operation of programs (including defragmentation programs), temporarily disable Preventive Protection.



If necessary, you can [configure](#) desktop and email notifications on Preventive Protection actions.

Exploit prevention

This option allows to block malicious programs that use vulnerabilities of well-known applications. From the corresponding drop-down list, select the required level of protection.

Protection level	Description
Prevent unauthorized code from being executed	If an attempt of a malicious object to exploit software vulnerabilities to get access to critical regions of the operating system is detected, it will be blocked automatically.
Interactive mode	If an attempt of a malicious object to exploit software vulnerabilities to get access to critical regions of the operating system is detected, Dr.Web will display an appropriate message. Read the information and select a suitable action.
Allow unauthorized code to be executed	If an attempt of a malicious object to exploit software vulnerabilities to get access to critical regions of the operating system is detected, it will be allowed automatically.



Applications

Appendix A. Command-Line Parameters

Additional command-line parameters (switches) are used to set parameters for programs, which can be launched by opening an executable file. This relates to **Dr.Web Scanner**, **Console Scanner** and **Dr.Web Updater**. The switches can set parameters that are either not present in the configuration file or have a higher priority than those specified in the file.

Switches begin with the forward slash (/) character and are separated by spaces as other command-line parameters.

The switches are listed alphabetically.

Scanner and Console Scanner Parameters

/AA—apply actions to detected threats automatically. (For **Scanner** only.)

/AC—scan installation packages. Option is enabled by default.

/AFS—use forward slash to separate paths in an archive. Option is disabled by default.

/AR—scan archives. Option is enabled by default.

/ARC: <compression_ratio>—maximum compression level. If the compression ratio of the archive exceeds the limit, Scanner neither unpacks nor scans the archive. By default: unlimited.

/ARL: <nesting_level>—maximum archive nesting level. By default: unlimited.

/ARS: <size>—maximum archive size (in KB). By default: unlimited.

/ART: <size>—minimum size of a file inside an archive beginning from which compression ratio check is performed (in KB). By default: unlimited.

/ARX: <size>—maximum size of a file inside an archive that is scanned (in KB). By default: unlimited.

/CUSTOM—perform a custom scan. If additional parameters are set (for example, objects to be scanned or /TM and /TB parameters), only the specified objects will be scanned. (For **Scanner** only.)

/BI—show information on virus databases. Option is enabled by default.

/DR—scan folders recursively (scan subfolders). Option is enabled by default.

/E: <number_of_threads>—perform scanning in specified number of threads.

/FAST—perform an **express scan** of the system. If additional parameters are set (for example, objects to be scanned or /TM and /TB parameters), the specified objects will also be scanned. (For **Scanner** only.)

/FL: <file_name>—scan paths listed in the specified file.

/FM: <mask>—scan files matching the specified mask. By default, all files are scanned.



/FR: <regexpr>—scan files matching the specified regular expression. By default, all files are scanned.

/FULL—perform a full scan of all hard drives and removable data carriers (including boot sectors). If additional parameters are set (for example, objects to be scanned or **/TM** and **/TB** parameters), an express scan will be performed, and the specified objects will be scanned. (For **Scanner** only.)

/FX: <mask>—exclude from scanning files that match the specified mask. (For **Console Scanner** only.)

/H or **/?**—show brief help. (For **Console Scanner** only.)

/HA—use heuristic analysis to detect unknown threats. Option is enabled by default.

/KEY: <key_file>—specify a path to the key file. It is necessary to use this parameter if your key file is stored outside of the installation folder where the scanner executables reside. By default, drweb32.key or another suitable file from the C:\Program Files\DrWeb\ folder is used.

/LITE—perform a basic scan of random access memory and boot sectors of all disks as well as run a scan for rootkits. (For **Scanner** only.)

/LN—resolve shell links. Option is disabled by default.

/LS—scan using LocalSystem account rights. Option is disabled by default.

/MA—scan mail files. Option is enabled by default.

/MC: <number_of_attempts>— set the maximum number of cure attempts. By default: unlimited.

/NB—do not backup cured or deleted files. Option is disabled by default.

/NI [:X]—limits usage of system resources at scanning (%), defines the amount of memory required for scanning and the priority of scanning process. By default: unlimited.

/NOREBOOT—cancel system reboot or shutdown after scanning. (For **Scanner** only.)

/NT—scan NTFS streams. Option is enabled by default.

/OK—show the full list of scanned objects and mark clean files with **Ok**. Option is disabled by default.

/P: <priority>—priority of the current scanning task. Can be as follows:

0—the lowest

L—low

N—normal (default priority)

H—high

M—maximal

/PAL: <nesting_level>—maximum nesting level for executable packers. If a nesting level is greater than the specified value, scanning proceeds until this limit is reached. The nesting level is 1,000 by default.

/QL—show the list of files quarantined on all disks. (For **Console Scanner** only.)

/QL: <logical_drive_letter>—show the list of files quarantined on the specified logical drive. (For **Console Scanner** only.)

/QNA—double quote paths.



`/QR[:[d][:p]]`—delete quarantined files on drive `<d>` (*logical_drive_letter*) that are older than `<p>` (*number*) days. If `<d>` and `<p>` are not specified, all quarantined files on all drives are deleted. (For **Console Scanner** only.)

`/QUIT`—terminate **Scanner** once scanning is complete regardless of whether or not any actions have been applied to the detected threats. (For **Scanner** only.)

`/RA:<file_name>`—append the specified file with the report on program operation. By default, logging is disabled.

`/REP`—follow symbolic links while scanning. Option is disabled by default.

`/RP:<file_name>`—append the specified file with the report on program operation. By default, logging is disabled.

`/RPC:<sec>`—Scanning Engine connection timeout. Timeout is 30 seconds by default. (For **Console Scanner** only.)

`/RPCD`—use dynamic RPC identification. (For **Console Scanner** only.)

`/RPCE`—use dynamic RPC endpoint. (For **Console Scanner** only.)

`/RPCE:<target_address>`—use specified RPC endpoint. (For **Console Scanner** only.)

`/RPCH:<host_name>`—use specified host name for remote call. (For **Console Scanner** only.)

`/RPCP:<protocol>`—use specified RPC protocol. Possible protocols are as follows: lpc, np, tcp. (For **Console Scanner** only.)

`/SCC`—show content of complex objects. Option is disabled by default.

`/SCN`—show installation package name. Option is disabled by default.

`/SLS`—show logs on the screen. Option is enabled by default. (For **Console Scanner** only.)

`/SPN`—show packer name. Option is disabled by default.

`/SPS`—display scan progress on the screen. Option is enabled by default. (For **Console Scanner** only.)

`/SST`—display object scan time. Option is disabled by default.

`/TB`—scan boot sectors including master boot record (MBR) of the hard drive.

`/TM`—scan processes in memory including Windows system control area.

`/TR`—scan system restore points.

`/W:<sec>`—maximum time to scan (sec.). By default: unlimited.

`/WCL`—drwebwcl compatible output. (For **Console Scanner** only.)

`/X:S[:R]`—set one of the following states for the computer to enter once scanning is complete: Shutdown/Reboot/Suspend/Hibernate.

The following actions can be specified for different objects ('C'—cure, 'Q'—move to quarantine, 'D'—delete, 'I'—ignore, 'R'—inform; 'R' is available for **Console Scanner** only; 'R' is set by default for all objects in **Console Scanner**):

- `/AAD:<action>`—action for adware (possible: DQIR)



- /AAR: <action>—action for infected archives (possible: DQIR)
- /ACN: <action>—action for infected installation packages (possible: DQIR)
- /ADL: <action>—action for dialers (possible: DQIR)
- /AHT: <action>—action for hacktools (possible: DQIR)
- /AIC: <action>—action for incurable files (possible: DQR)
- /AIN: <action>—action for infected files (possible: CDQR)
- /AJK: <action>—action for jokes (possible: DQIR)
- /AML: <action>—action for infected mail files (possible: QIR)
- /ARW: <action>—action for riskware (possible: DQIR)
- /ASU: <action>—action for suspicious files (possible: DQIR)

Several switches can have modifiers that explicitly enable or disable options specified by these switches. For example, as follows:

/AC- option is clearly disabled
/AC, /AC+ option is clearly enabled

These modifiers can be useful if the option was enabled or disabled by default or was set in the configuration file earlier. The following switches can have modifiers:

/AC, /AFS, /AR, /BI, /DR, /HA, /LN, /LS, /MA, /NB, /NT, /OK, /QNA, /REP, /SCC, /SCN, /SLS, /SPN, /SPS, /SST, /TB, /TM, /TR, /WCL.

For /FL parameter '-' modifier directs to scan the paths listed in the specified file and then delete this file.

For /ARC, /ARL, /ARS, /ART, /ARX, /NI[:X], /PAL, /RPC, /W parameters "0" value means that there is no limit.

The following example shows how to use command-line switches with **Console Scanner**:

```
[<path_to_program>]dwscancl /AR- /AIN:C /AIC:Q C:\
```

scan all files on disk 'C:', excluding those in archives; cure the infected files and move to quarantine those that cannot be cured. To run **Scanner** the same way, enter the dwscancl command name instead of dwscanner.



Dr.Web Updater Command-line Parameters

Common options

Parameter	Description
-h [--help]	Show a short help message on how to use the program.
-v [--verbosity] arg	Log level. Can be one of following: error (standard), info (extended), debug.
-d [--data-dir] arg	Directory where repository and settings are located.
--log-dir arg	Directory for storing the log file.
--log-file (=dwupdater.log) arg	Log file name.
-r [--repo-dir] arg	Repository directory, (<data_dir>/repo by default).
-t [--trace]	Enable tracing.
-c [--command] arg (=update)	Command to execute: getversions, getcomponents, init, update, uninstall, exec, keyupdate, and download.
-z [--zone] arg	Zones that are to be used instead of those specified in the configuration file.

init command parameters

Parameter	Description
-s [--version] arg	Version name.
-p [--product] arg	Product name.
-a [--path] arg	Product directory path. This folder will be used as the default directory for all components included in the product. Dr.Web Updater will search for a key file in this directory.
-n [--component] arg	Component name and installation folder specified as follows: <name>, <install path>.
-u [--user] arg	Username for proxy server.
-k [--password] arg	Password for proxy server.
-g [--proxy] arg	Proxy server for updating. <address>:<port>.
-e [--exclude] arg	Component name that will be excluded from the product during installation.

update command parameters

Parameter	Description
-p [--product] arg	Product name. If specified, only this product will be updated. If neither a product nor certain components are specified, all products will be updated. If certain components are specified, only they will be updated.
-n [--component] arg	Components that should be updated to the specified version. <Name>, <target revision>.
-x [--selfrestart] arg (=yes)	Reboot after an update of Dr.Web Updater . Default value is <code>yes</code> . If the value is set to <code>no</code> , notification that reboot is required will appear.
--geo-update	Get the list of IP addresses from update.drweb.com before updating.
--type arg (=normal)	Can be one of the following: <ul style="list-style-type: none">• Reset-all—forced update of all components



Parameter	Description
	<ul style="list-style-type: none">• Reset-failed—reset revision for damaged components• Normal-failed—try to update all components including damaged from the current revision to the newest or specified• update-revision – try to update all components of the current revision to the newest if exists• Normal—update all components
-g [--proxy] arg	Proxy server for updating. <address>:<port>.
-u [--user] arg	Username for proxy server.
-k [--password] arg	Password for proxy server.
--param arg	Pass additional parameters to the script. <Name>: <value>.
-l [--progress-to-console]	Print information about downloading and script execution to the console.

exec command parameters

Parameter	Description
-s [--script] arg	Execute this script.
-f [--func] arg	Execute this function in the script.
-p [--param] arg	Pass additional parameters to the script. <Name>: <value>.
-l [--progress-to-console]	Print information about script execution to the console.

getcomponents command parameters

Parameter	Description
-s [--version] arg	Version name.
-p [--product] arg	Specify the product to get the list of components that are included in this product. If the product is not specified, all components of this version will be listed.

getrevisions command parameters

Parameter	Description
-s [--version] arg	Version name.
-n [--component] arg	Component name.

uninstall command parameters

Parameter	Description
-n [--component] arg	Name of the component that is to be uninstalled.
-l [--progress-to-console]	Print information about command execution to the console.
--param arg	Pass additional parameters to the script. <Name>: <value>.



Parameter	Description
-e [--add-to-exclude]	Components to be deleted. Update of this components will not be performed.

keyupdate command parameters

Parameter	Description
-m [--md5] arg	MD5 hash of the previous key file.
-o [--output] arg	Output file name to store new key.
-b [--backup]	Backup of an old key file if exists.
-g [--proxy] arg	Proxy server for updating. <address>:<port>.
-u [--user] arg	Username for proxy server.
-k [--password] arg	Password for proxy server.
-l [--progress-to-console]	Print information about downloading of the key file to the console.

download command parameters

Parameter	Description
--zones arg	Zone description file.
--key-dir arg	Directory where the key file is located.
-l [--progress-to-console]	Print information about command execution to the console.
-g [--proxy] arg	Proxy server for updating. <address>:<port>.
-u [--user] arg	Username for proxy server.
-k [--password] arg	Password for proxy server.
-s [--version] arg	Version name
-p [--product] arg	Name of the product to download.

Return Codes

The values of the return code and corresponding events are as follows:

Return code value	Event
0	OK, no virus found.
1	Known virus detected.
2	Modification of known virus detected.
4	Suspicious object found.
8	Known virus detected in file archive, mail archive, or container.
16	Modification of known virus detected in file archive, mail archive, or container.
32	Suspicious file found in file archive, mail archive, or container.
64	At least one infected object successfully cured.
128	At least one infected or suspicious file deleted/renamed/moved.

The actual value returned by the program is equal to the sum of codes for the events that occurred



during scanning. Obviously, the sum can be easily decomposed into separate event codes.

For example, return code $9 = 1 + 8$ means that known viruses were detected, including viruses in archives, mail archives or containers; curing and others actions were not executed; no other "virus" events occurred during scanning.



Appendix B. Computer Threats and Neutralization Methods

With the development of computer technologies and network solutions malicious programs (malware) of different kinds, meant to strafe users, become more and more widespread. Their development began together with computer science and facilities of protection against them progressed alongside. Nevertheless, there is still no common classification for all possible threats due to their unpredictable development character and constant improvement of applicable technologies.

Malicious programs can be distributed through the Internet, local area networks, email and portable data mediums. Some of them rely on the user's carelessness and lack of experience and can be run in completely automatic mode. Others are tools controlled by a computer cracker and they can harm even the most secure systems.

This chapter describes all of the most common and widespread types of malware, against which products of **Doctor Web** are aimed.

Classification of Computer Threats

Herein, the term "threat" defines any kind of software that can potentially or directly inflict damage on a computer or network or compromise the user's information or rights (in other words, malicious and other unwanted programs). However, generally speaking, the term "threat" may be used to indicate any potential danger to computer or network security (that is, vulnerabilities that can be exploited to launch attacks).

All program types described below have the ability to endanger the user's data or confidentiality. Programs that do not hide their presence from the user (for example, spam-sending software or traffic analyzers) usually are not considered to be computer threats, although they can become threats under certain circumstances.

In the documentation and products by **Doctor Web**, threats are divided into two categories in accordance with the severity of danger they pose.

- **Major threats** are classic computer threats that can perform destructive or illegal actions in the system on their own (erase or steal important data, crash networks, and so on). To this type of computer threats belong programs that are traditionally referred to as "malicious" (viruses, worms, and Trojans).
- **Minor threats** are less dangerous than major threats, but may be used by a third party to carry out malicious activities. Moreover, mere presence of minor threats in the system indicates its low protection level. Information security specialists sometimes refer to this type of threats as "grayware" or potentially unwanted programs. This category consists of adware, dialers, jokes, riskware, and hacktools.

Major threats

Computer viruses

This type of computer threats is characterized by their ability to inject malicious code into running processes of other programs. This action is called *infection*. In most cases, the infected file becomes a virus carrier itself, and the injected code does not necessarily match the original one. The majority of viruses are created with a purpose to damage or destroy data in the system.

Doctor Web divides viruses by the type of objects they infect into the following categories:



- **File viruses** infect operating system files (usually, executable files and dynamic-link libraries) and are activated when an infected file is run.
- **Micro viruses** infect documents used by Microsoft® Office or other programs supporting macro commands (usually, written in Visual Basic). Macro commands are a type of built-in programs (macros) that are written in a fully functional programming language and can be launched under specific circumstances (for example, in Microsoft® Word, macros can be activated upon opening, closing, or saving a document).
- **Script viruses** are created using script languages, and, mostly, they infect other scripts (such as OS service files). By exploiting vulnerable scripts in web applications, they can also infect other file types that support script execution.
- **Boot viruses** infect boot sectors of disks and partitions or master boot records of hard disks. They require little memory and can perform their tasks until the operating system is rolled out, restarted, or shut down.

Most viruses have special mechanisms that protect them against detection. These mechanisms are constantly improved, and ways to overcome them are constantly developed. According to the type of protection they use, all viruses can be divided into two following groups:

- **Encrypted viruses** self-encrypt their malicious code upon every infection to make its detection in a file, boot sector, or memory more difficult. Each sample of such viruses contains only a short common code fragment (decryption procedure) that can be used as a virus signature.
- **Polymorphic viruses** use a special decryption procedure in addition to code encryption. This procedure is different in every new virus copy. This means that such viruses do not have byte signatures.

Viruses can also be classified according to the language they are written in (most viruses are written in Assembly, high-level programming languages, script languages, and so on) and operating systems that can be infected by these viruses.

Computer worms

Recently, worms have become much more widespread than viruses and other malicious programs. Like viruses, these malicious programs can replicate themselves. A worm infiltrates a computer from a network (usually, as an email attachment) and spreads its functional copies among other computers. Distribution can be triggered by some user action or automatically.

Worms do not necessarily consist of only one file (the worm's body). Many of them have a so-called infectious part (shellcode) that is loaded into the main memory. After that, it downloads the worm's body as an executable file via the network. If only the shellcode is present in the system, the worm can be easily removed by restarting the system (at that, RAM is reset). However, if the worm's body infiltrates the computer, only an anti-virus program can fight it.

Even if worms do not bear any payload (do not cause direct damage to a system), they can still cripple entire networks because of how intensely they spread.

Doctor Web classifies worms in accordance with their distribution methods as follows:

- **Network worms** spread via various network and file-sharing protocols.
- **Mail worms** spread via mail protocols (POP3, SMTP, and others).



Trojan programs (Trojans)

These programs cannot replicate themselves. However, they can perform malicious actions on their own (damage or delete data, forward confidential information, and others) or provide cybercriminals with authorized access to a computer to harm a third party.

Like viruses, these programs can perform various malicious activities, hide their presence from the user, and even be a virus component. However, usually, Trojans are distributed as separate executable files (through file-exchange servers, data carriers, or email attachments) that are run by users themselves or by some specific system process.

Here are some Trojan types divided by **Doctor Web** into separate categories as follows:

- **Backdoors** are Trojans that allow an intruder to get privileged access to the system bypassing any existing protection mechanisms. Backdoors do not infect files—they register themselves in the registry modifying registry keys.
- **Droppers** are file carriers that contain malicious programs in their bodies. Once launched, a dropper copies malicious files to a hard disk without user consent and runs them.
- **Keyloggers** can log data that users enter by means of a keyboard. These malicious programs can steal various confidential information (including network passwords, logins, bank card data, and so on).
- **Clickers** redirect users to specified Internet resources (may be malicious) in order to increase traffic to those websites or to perform DoS attacks.
- **Proxy Trojans** provide cybercriminals with anonymous Internet access via the victim's computer.
- **Rootkits** are used to intercept operating system functions in order to hide their presence. Moreover, a rootkit can conceal processes of other programs, registry keys, folders, and files. It can be distributed either as an independent program or as a component of another malicious application. Based on the operation mode, rootkits can be divided into two following categories: User Mode Rootkits (UMR) that operate in user mode (intercept functions of user-mode libraries) and Kernel Mode Rootkits (KMR) that operate in kernel mode (intercept functions at the system kernel level, which makes these malicious programs hard to detect).

Trojans can also perform other malicious actions besides those listed above. For example, they can change the browser home page or delete certain files. However, such actions can also be performed by threats of other types (viruses or worms).

Minor threats

Hacktools

Hacktools are designed to assist intruders with hacking. The most common among these programs are port scanners that detect vulnerabilities in firewalls and other components of computer protection system. Such tools can be used not only by hackers but also by administrators to check security of their networks. Sometimes various programs that use social engineering techniques are designated as hacktools too.



Adware

Usually, this term refers to a program code incorporated into freeware programs that forcefully display advertisements to users. However, sometimes such codes can be distributed via other malicious programs and show advertisements, for example, in web browsers. Many adware programs operate based on data collected by spyware.

Jokes

Like adware, this type of minor threats cannot be used to inflict any direct damage on the system. Joke programs usually just generate messages about allegedly detected errors and threaten to perform actions that may lead to data loss. Their purpose is to frighten or annoy users.

Dialers

These are special programs that, after asking for user's permission, employ Internet connection to access specific websites. Usually, these programs have a signed certificate and inform the user about all their actions.

Riskware

These programs are not intended to be computer threats. However, they can still cripple system security due to certain features and, therefore, are classified as minor threats. This type of threats includes not only programs that can accidentally damage or delete data but also programs that can be used by hackers or some malicious applications to harm the system. Among such programs are various remote chat and administrative tools, FTP-servers, and so on.

Suspicious objects

These are potential computer threats detected by the heuristic analyzer. Such objects can be any type of threat (even unknown to information security specialists) or turn out safe in case of a false detection. It is strongly recommended to move files containing suspicious objects to quarantine and send them for analysis to **Doctor Web anti-virus laboratory**.



Actions Applied to Threats

There are many methods of neutralizing computer threats. Products of **Doctor Web** combine these methods for the most reliable protection of computers and networks using flexible user-friendly settings and a comprehensive approach to security assurance. The main actions for neutralizing malicious programs are:

1. *Cure*—an action applied to viruses, worms and Trojans. It implies deletion of malicious code from infected files or deletion of a malicious program's functional copies as well as the recovery of affected objects (that is, return of the object's structure and operability to the state which was before the infection) if it is possible. Not all malicious programs can be cured. However, products of **Doctor Web** are based on most effective curing and file recovery algorithms.
2. *Move to quarantine*—an action when the malicious object is moved to a special folder and isolated from the rest of the system. This action is preferable in cases when curing is impossible and for all suspicious objects. It is recommended to send copies of such files to **Doctor Web** anti-virus laboratory.
3. *Delete*—the most effective action for neutralizing computer threats. It can be applied to any type of malicious objects. Note that deletion will sometimes be applied to certain files for which curing was selected. This will happen if the file contains only malicious code and no useful information. For example, curing of a computer worm implies deletion of all its functional copies.
4. *Block, rename*—these actions can also be used for neutralizing malicious programs. In the former case, all access attempts to or from the file are blocked. In the latter case, the extension of the file is renamed, which makes it inoperative.



Appendix C. Naming of Viruses

Specialists of the **Dr.Web** Virus Laboratory give names to all collected samples of computer threats. These names are formed according to certain principles and reflect a threat's design, classes of vulnerable objects, distribution environment (OS and applications) and some other features. Knowing these principles may be useful for understanding software and organizational vulnerabilities of the protected system. The full and constantly updated version of this classification is available at <http://vms.drweb.com/classification/>.

In certain cases this classification is conventional, as some viruses can possess several features at the same time. Besides, it should not be considered exhaustive, as new types of viruses constantly appear and the classification is made more precise.

The full name of a virus consists of several elements, separated with full stops. Some elements at the beginning of the full name (prefixes) and at the end of it (suffixes) are standard for the accepted classification.

Prefixes

Affected Operating Systems

The prefixes listed below are used for naming viruses infecting executable files of certain operating systems:

- Win – 16-bit Windows 3.1 programs
- Win95 – 32-bit Windows 95/98/Me programs
- WinNT – 32-bit Windows NT/2000/XP/Vista programs
- Win32 – 32-bit Windows 95/98/Me and NT/2000/XP/Vista programs
- Win32.NET – programs in Microsoft .NET Framework operating system
- OS2 – OS/2 programs
- Unix – programs in various Unix-based systems
- Linux – Linux programs
- FreeBSD – FreeBSD programs
- SunOS – SunOS (Solaris) programs
- Symbian – Symbian OS (mobile OS) programs

Note that some viruses can infect programs of one system even if they are designed to operate in another system.

Macrovirus Prefixes

The list of prefixes for viruses which infect MS Office objects (the language of the macros infected by such type of virus is specified):

- WM – Word Basic (MS Word 6.0-7.0)
- XM – VBA3 (MS Excel 5.0-7.0)
- W97M – VBA5 (MS Word 8.0), VBA6 (MS Word 9.0)
- X97M – VBA5 (MS Excel 8.0), VBA6 (MS Excel 9.0)
- A97M – databases of MS Access'97/2000



- PP97M – MS PowerPoint presentations
- O97M – VBA5 (MS Office'97), VBA6 (MS Office 2000); this virus infects files of more than one component of MS Office

Development Languages

The HLL group is used to name viruses written in high level programming languages, such as C, C++, Pascal, Basic and others. To specify functioning algorithms, the following modifiers can be used:

- HLLW – worms
- HLLM – mail worms
- HLLQ – viruses overwriting the code of the victim program
- HLLP – parasitic viruses
- HLLC – companion viruses

The following prefix also refers to development language:

- Java – viruses designed for the Java virtual machine

Trojan programs (Trojans)

Trojan – a general name for different Trojan horses (Trojans). In many cases the prefixes of this group are used with the Trojan prefix.

- PWS – password stealing Trojan
- Backdoor – Trojan with RAT-function (Remote Administration Tool – a utility for remote administration)
- IRC – Trojan which uses Internet Relay Chat channels
- DownLoader – Trojan which secretly downloads different malicious programs from the Internet
- MulDrop – Trojan which secretly downloads different viruses contained in its body
- Proxy – Trojan which allows a third party user to work anonymously in the Internet via the infected computer
- StartPage (synonym: Seeker) – Trojan which makes unauthorized replacement of the browser's home page address (start page)
- Click – Trojan which redirects a user's browser to a certain website (or websites)
- KeyLogger – a spyware Trojan which logs key strokes; it may send collected data to a malefactor
- AVKill – terminates or deletes anti-virus programs, firewalls, etc.
- KillFiles, KillDisk, DiskEraser – deletes certain files (all files on drives, files in certain directories, files by certain mask, etc.)
- DelWin – deletes files vital for the operation of Windows OS
- FormatC – formats drive C (synonym: FormatAll – formats all drives)
- KillMBR – corrupts or deletes master boot records (MBR)
- KillCMOS – corrupts or deletes CMOS memory

Tool for Attacking Vulnerabilities

- Exploit – a tool exploiting known vulnerabilities of an OS or application to implant malicious code or perform unauthorized actions



Tools for Network Attacks

- `Nuke` – tools for network attacks on known vulnerabilities of operating systems leading to abnormal shutdowns of the attacked system
- `DDoS` – agent program for performing a DDoS attack (*Distributed Denial Of Service*)
- `FDoS` (synonym: `Flooder`) – *Flooder Denial Of Service* – programs for performing malicious actions in the Internet which use the idea of DDoS attacks; in contrast to DDoS, when several agents on different computers are used simultaneously to attack one victim system, an FDoS program operates as an independent "self-sufficient" program (Flooder Denial of Service).

Script Viruses

Prefixes of viruses written in different scrip languages:

- `VBS` – Visual Basic Script
- `JS` – Java Script;
- `Wscript` – Visual Basic Script and/or Java Script
- `Perl` – Perl
- `PHP` – PHP
- `BAT` – MS-DOS command interpreter

Malicious Programs

Prefixes of malicious programs that are not viruses:

- `Adware` – an advertising program
- `Dialer` – a dialer program (redirecting modem calls to predefined paid numbers or paid resources)
- `Joke` – a joke program
- `Program` – a potentially dangerous program (*riskware*)
- `Tool` – a program used for hacking (*hacktool*)



Miscellaneous

Generic – this prefix is used after another prefix describing the environment or the development method to name a typical representative of this type of viruses. Such virus does not possess any characteristic features (such as text strings, special effects, etc.) which could be used to assign it some specific name.

Silly – this prefix was used to name simple featureless viruses the with different modifiers in the past.

Suffixes

Suffixes are used to name some specific virus objects:

- **generator** – an object which is not a virus, but a virus generator.
- **based** – a virus which is developed with the help of the specified generator or a modified virus. In both cases the names of this type are generic and can define hundreds and sometimes even thousands of viruses.
- **dropper** – an object which is not a virus, but an installer of the given virus.

